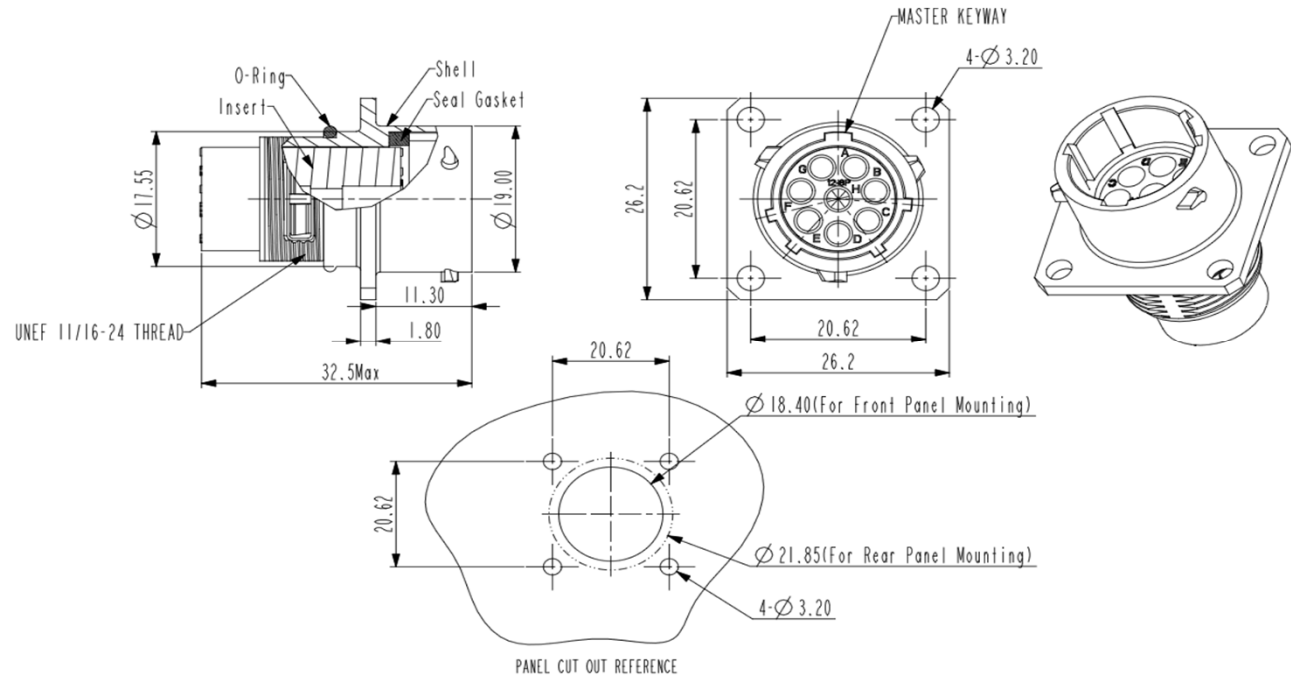


| CONFIGURATION                                                                       |                                                                  | PART NUMBER |  |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------|-------------|--|
| Male Receptacle, 8 Pin, 16 Awg, Shell 12                                            |                                                                  | RT00128PNH  |  |
| DIMENSIONS                                                                          |                                                                  |             |  |
|  |                                                                  |             |  |
| TECHNICAL DATA                                                                      |                                                                  |             |  |
| TEMPERATURE RANGE:                                                                  | -40°C to + 105°C                                                 |             |  |
| PROTECTION:                                                                         | IP67 in mated condition and in combination with sealed backshell |             |  |
| VOLTAGE RATING:                                                                     | 250V                                                             |             |  |
| HOUSING BODY:                                                                       | Zinc Alloy, Nickel Plated                                        |             |  |
| COUPLING NUT:                                                                       | -                                                                |             |  |
| INSERT:                                                                             | Glass-filled Thermoplastic UL94-V0                               |             |  |
| SEAL:                                                                               | NBR                                                              |             |  |
| CURRENT:                                                                            | 13A                                                              |             |  |
| CONTACT SIZE:                                                                       | 16Awg                                                            |             |  |
| APPROVALS:                                                                          | UL ECBT2                                                         |             |  |