




TOP VIEW





SIDE VIEW

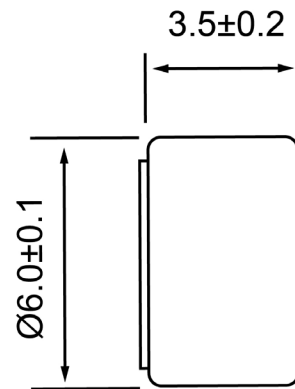

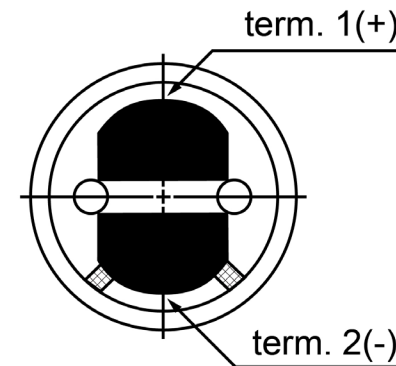BOTTOM VIEW



Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Directivity	Unidirectional		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S.		
Technology	Electret Condenser									
Sensitivity	-46	(dB)								
Frequency Range	100 ~ 10,000	(Hz)								
Rated Voltage	2	(V)								
Output Impedance	2,200	(Ohm)								
Connection Method	Solder Pads									
Voltage Range	1.0 ~ 10.0	(V)								
Max Rated Current	0.5	(mA)								
Min. Signal to Noise Ratio	>55	(dB)								
Operating Temperature	-10 ~ +50	°C								
Storage Temperature	-20 ~ +60	°C								
						Electret Condenser Microphone		MU064602-2		
						Drawn by G.W.	Date 10/31/2013	Checked by C.E.	Date 1/16/2014	Approved by J.S.