



### Bestückungsplan / contact layout

■ bestückt / assemble

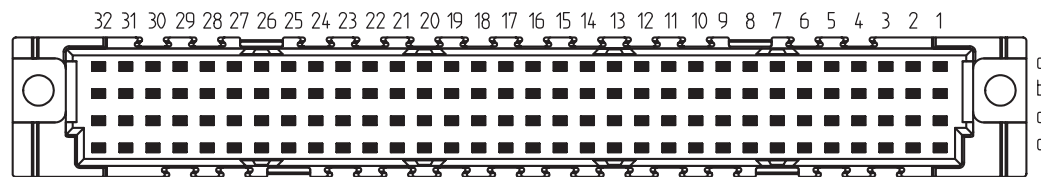

### Leiterplatten-Lochbild / PCB drillhole pattern

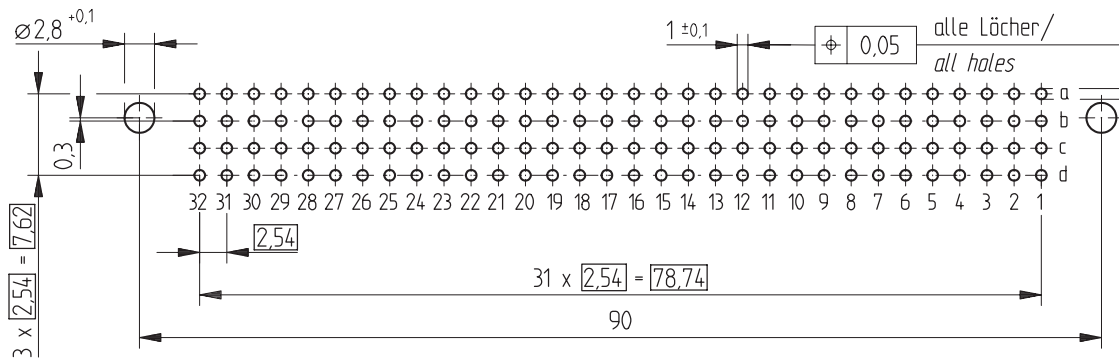

Tauchlötaschluß 0,65 x 0,3 mm / solder terminal 0,65 x 0,3 mm



Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

|   |  |  |             |  |
|---|--|--|-------------|--|
| Information:  | Tolerances   | <br>All Dimensions<br>in mm | Scale       | 2:1  |
|   |  |  | Designation | Federleiste CD 128 Löt<br>Fem. Connector CD 128 Solder |
| All rights reserved.<br>Only for information.<br>To insure that this is the latest<br>version of this drawing, please<br>contact one of the ERNI companies<br>before using. | Subject to modification without<br>prior notice.<br>Drawing will not be updated. |  www.ERNI.com               | 284182      | I  |
|   |  |  | STVCD       |  |
| Index   | Date   | N:00062247.SZA   |             |  |

Consider protection memo from DIN 34

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[284182](#)