
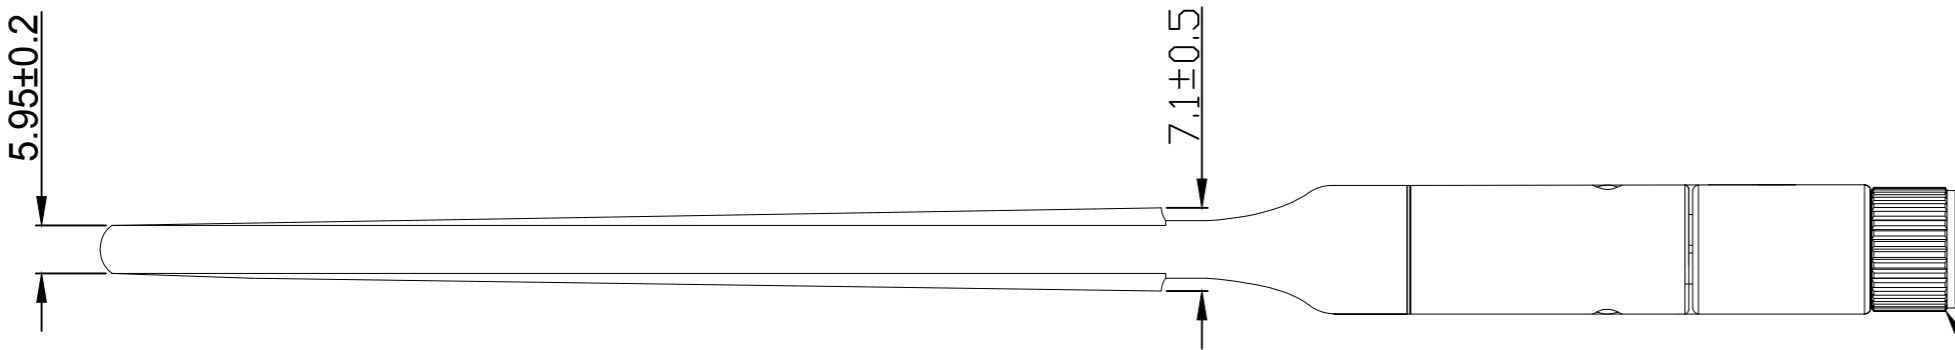


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	TURN TO Rev.A	27MAY2019	PH	AC

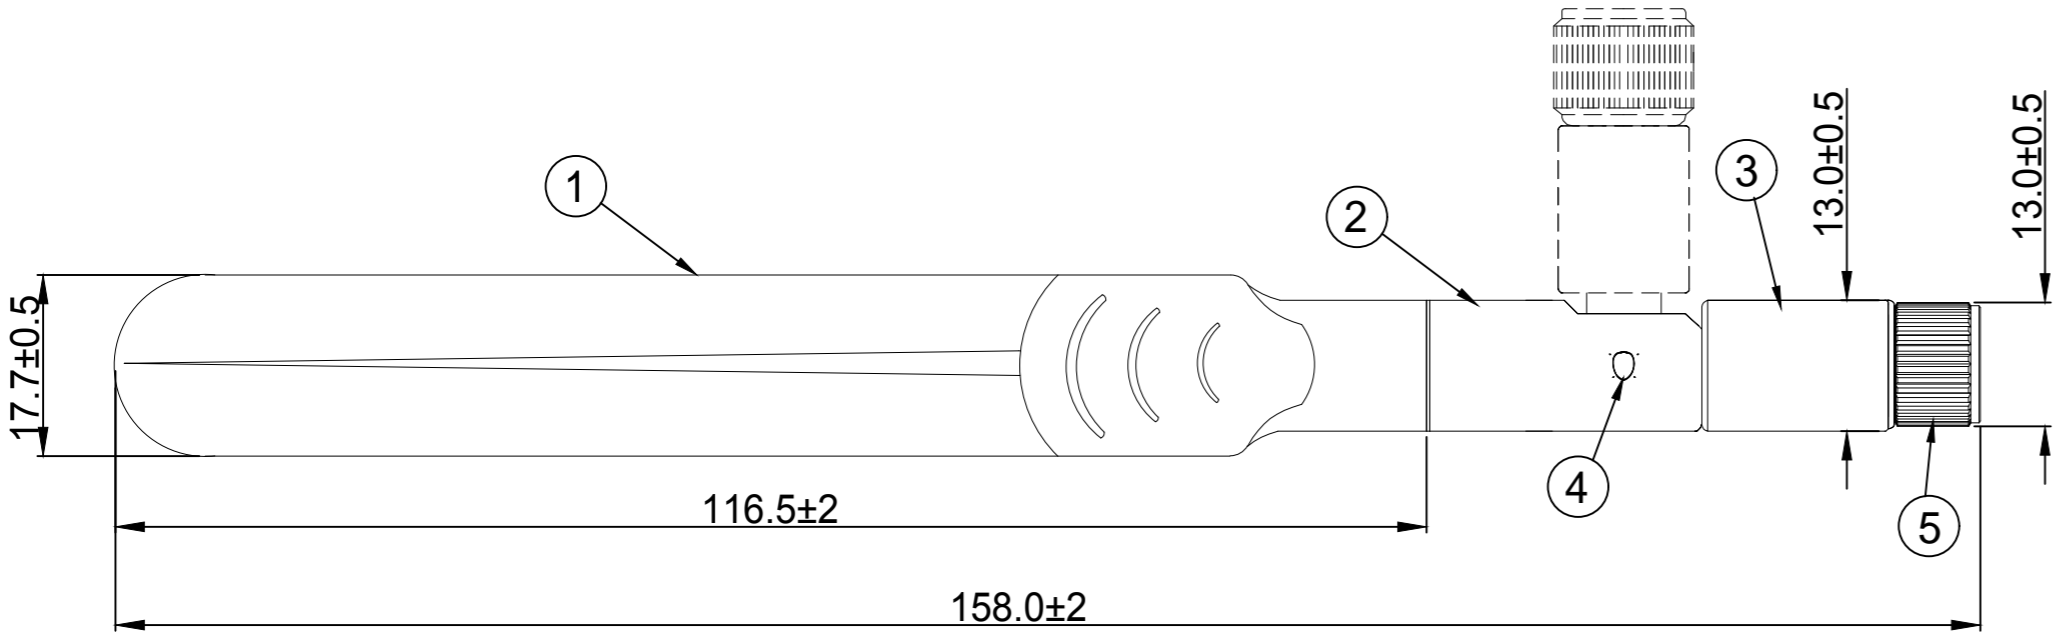

SMA Male  
SMA公頭公針



RoHS

NOTES:

1. Specitation:
- 1.1 Frequency Range:698~960MHz  
1420~1610MHz  
1710~2700MHz  
1575~1605MHz
  - 1.2 VSWR: 2.5MAX
  - 1.3 Peak Gain:2.5dBi
  - 1.4 Impedance:50 Ω

2.PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

5	CONN	SMA PLUG and male needle electric	1
4	Rivet	Pom rivet (Black)	2
3	Buttom Base	Lower fixed seat Phi (Black)	1
2	Upper Base	On the fixed seat diameter (Black)	1
1	Antenna Cap	Antenna rod sleeve (Black)	1
NO.	ITEM	SPECIFICATION	QTY.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ALLEN HU 06SEPI2018		 TE Connectivity	
		CHK AMOS CHEAH 06SEPI2018			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME EXTERNAL PADDLE LTE ANTENNA	
		0 PLC ± - 1 PLC ± 0.1 2 PLC ± 0.05 3 PLC ± 0.02 4 PLC ± - ANGLES ± -			
MATERIAL -		FINISH -		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C=2195736	
				RESTRICTED TO -	
				SCALE 1:1	
				SHEET 1 of 1	
				REV A	