

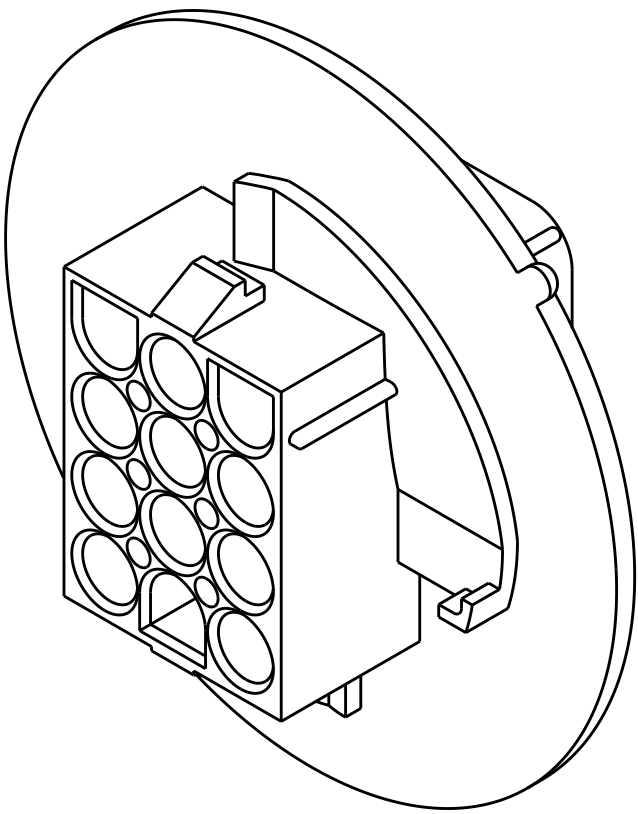


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	E	REVISED PER ECR-17-015775	03NOV2017	BDA	KR




1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
5. FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.
6. GLOW-WIRE FLAMMABILITY (GWF1) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
7. GLOW-WIRE FLAMMABILITY (GWF1) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
8. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.
9. UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

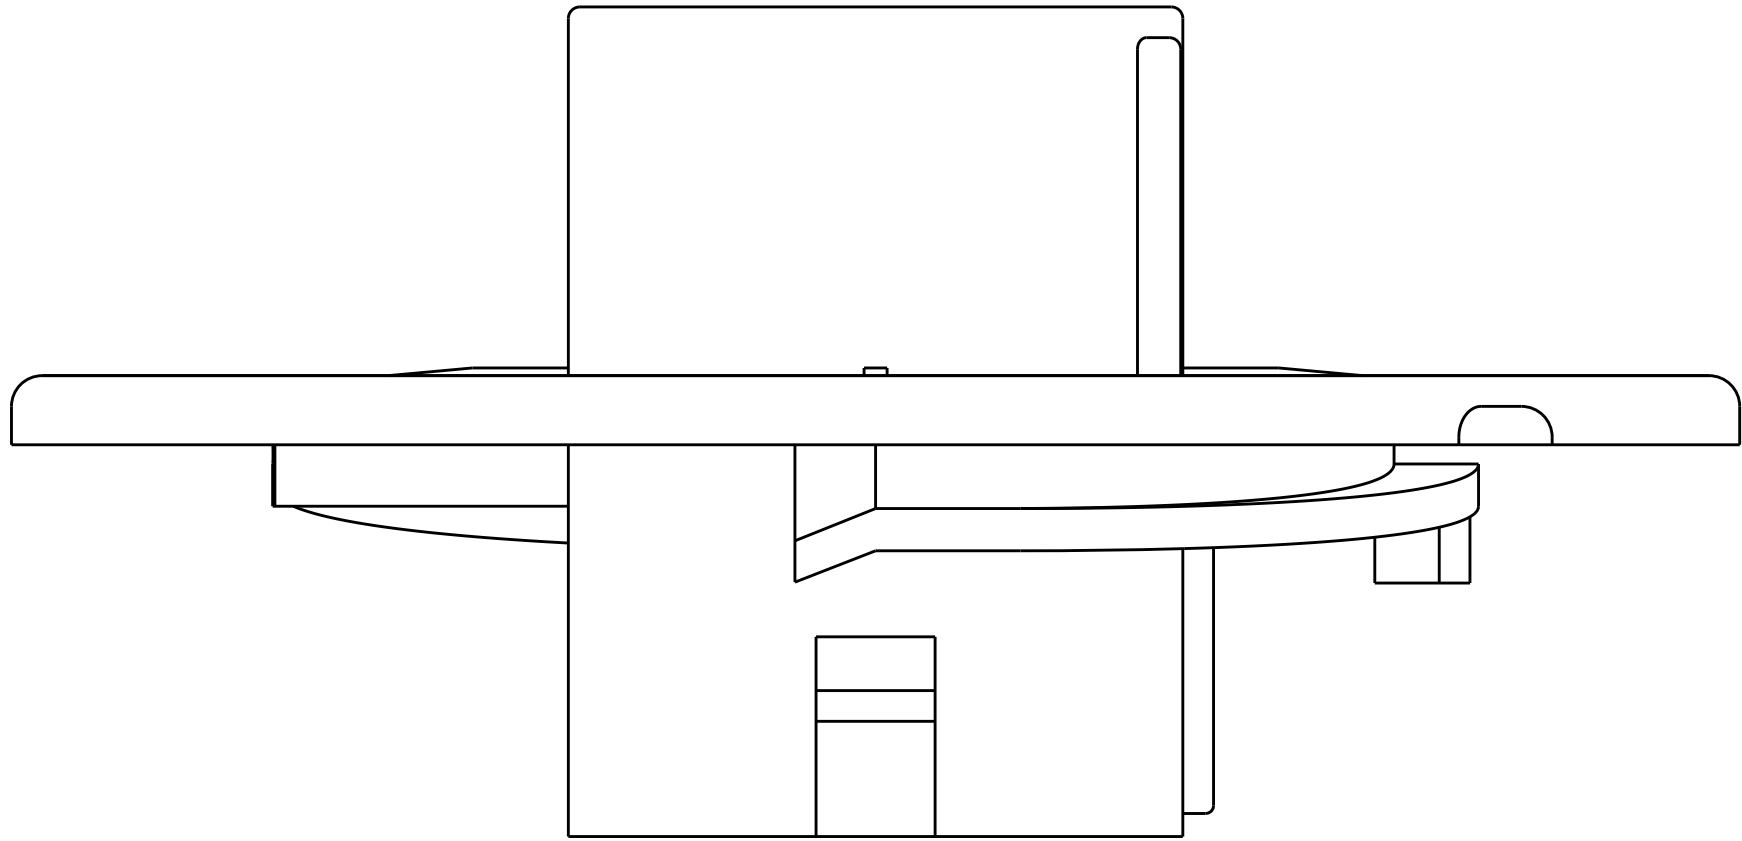

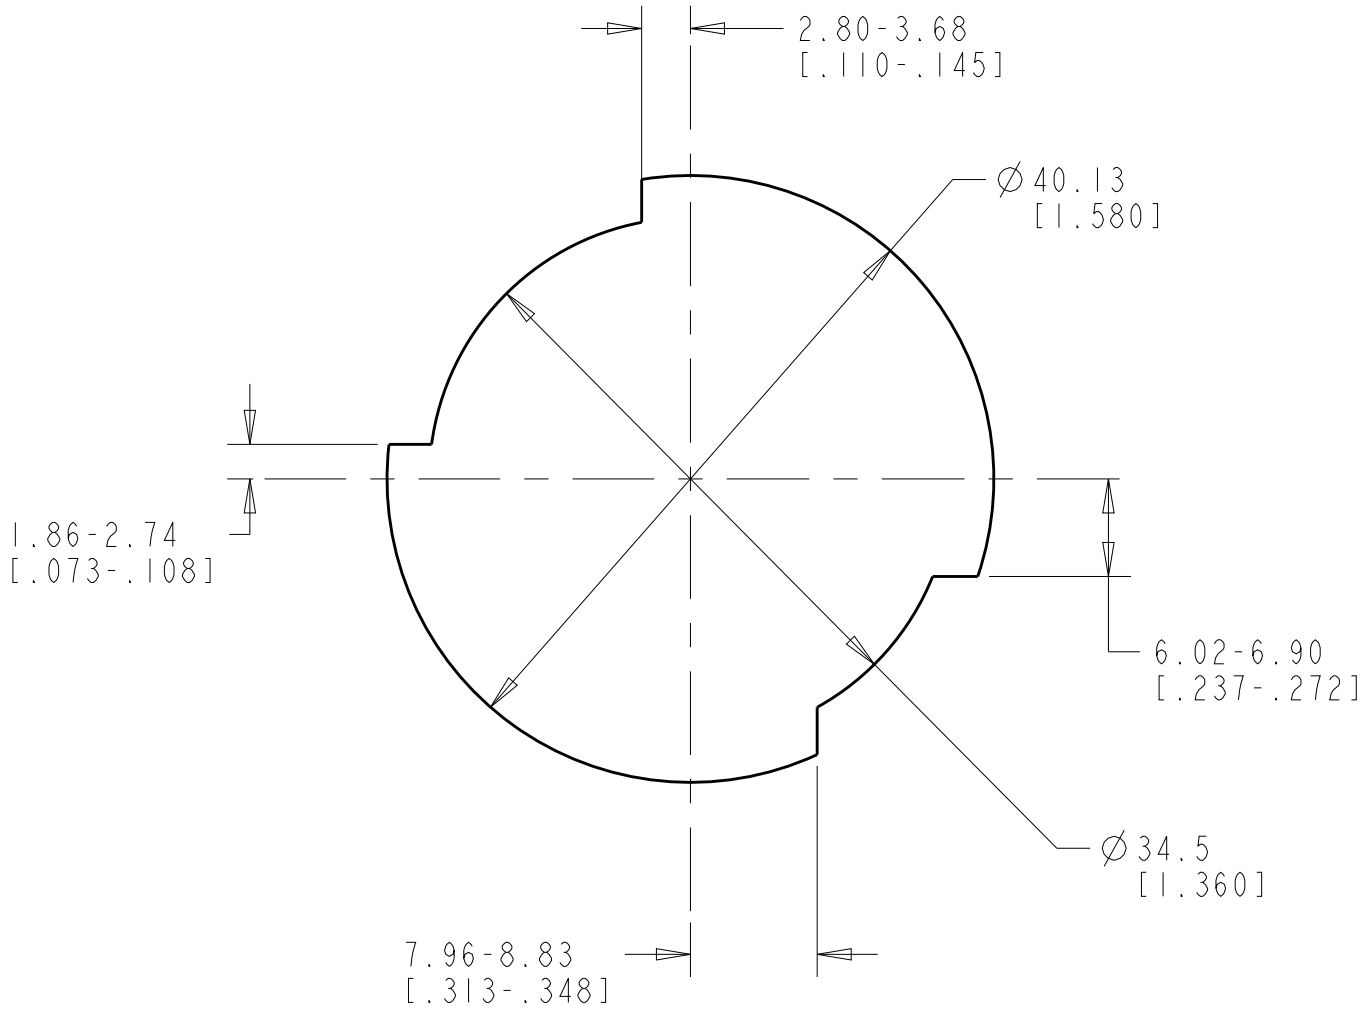

3-DIMENSIONAL MODEL
SCALE 2:1

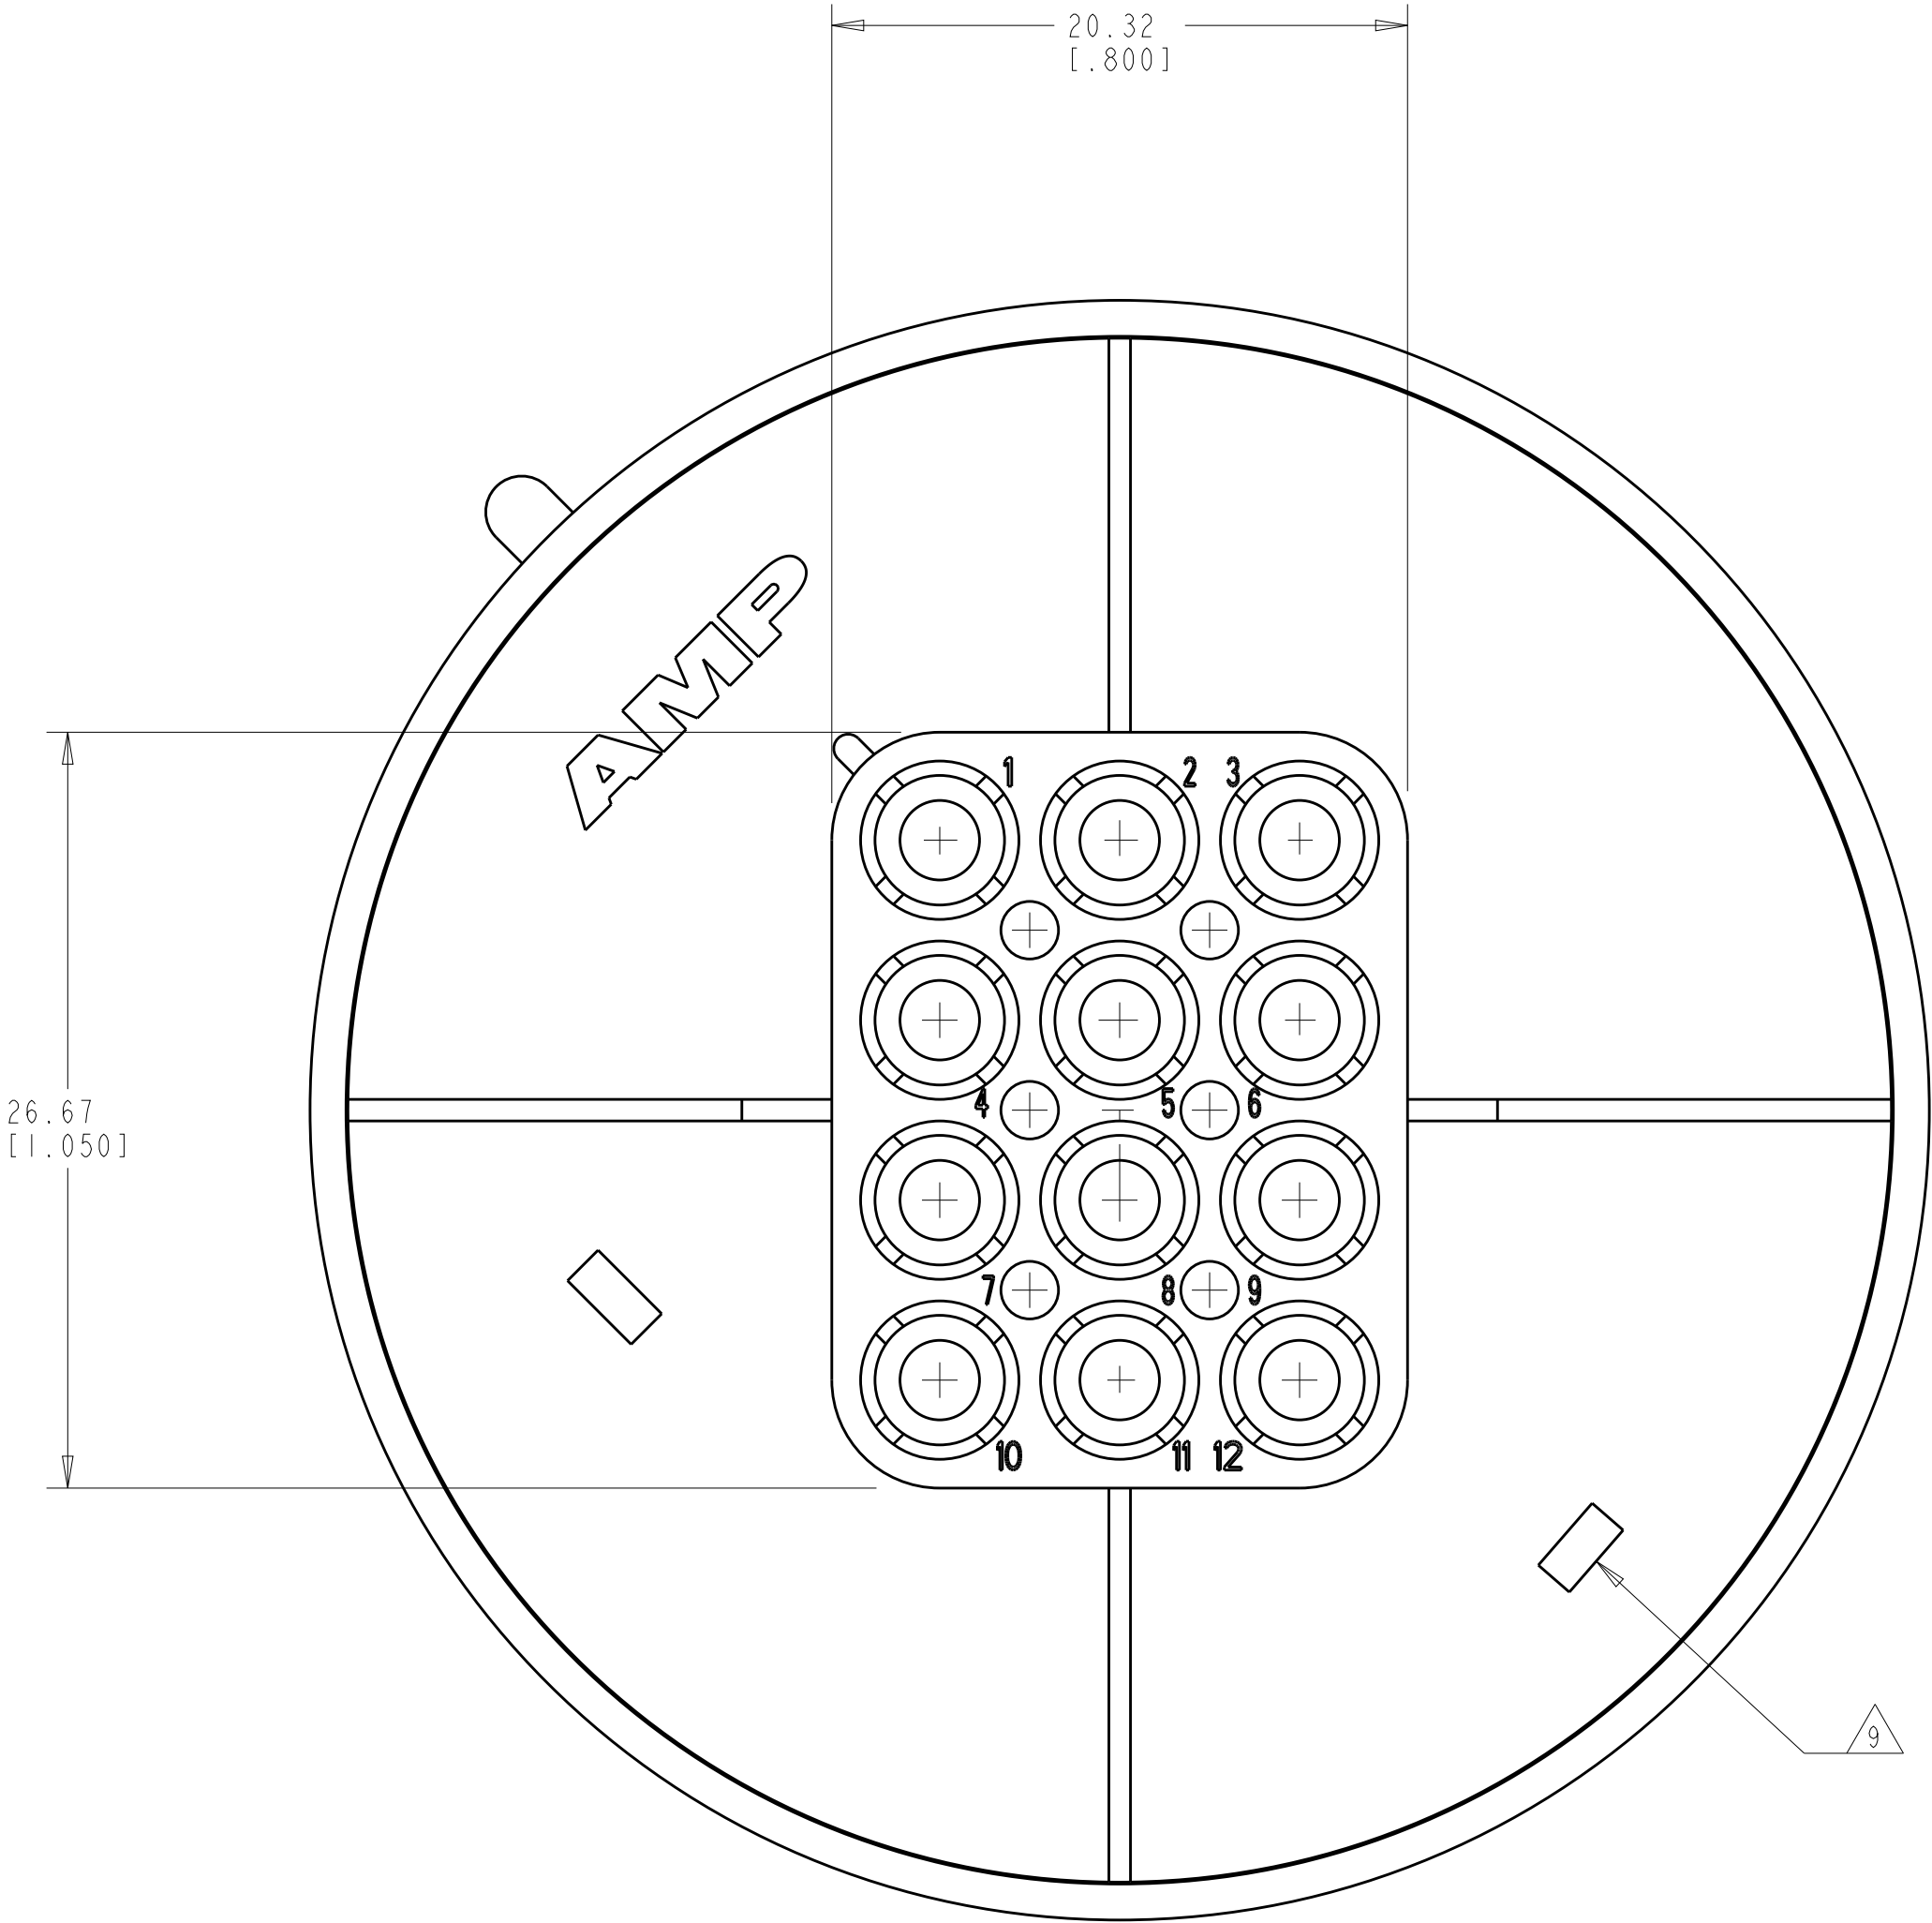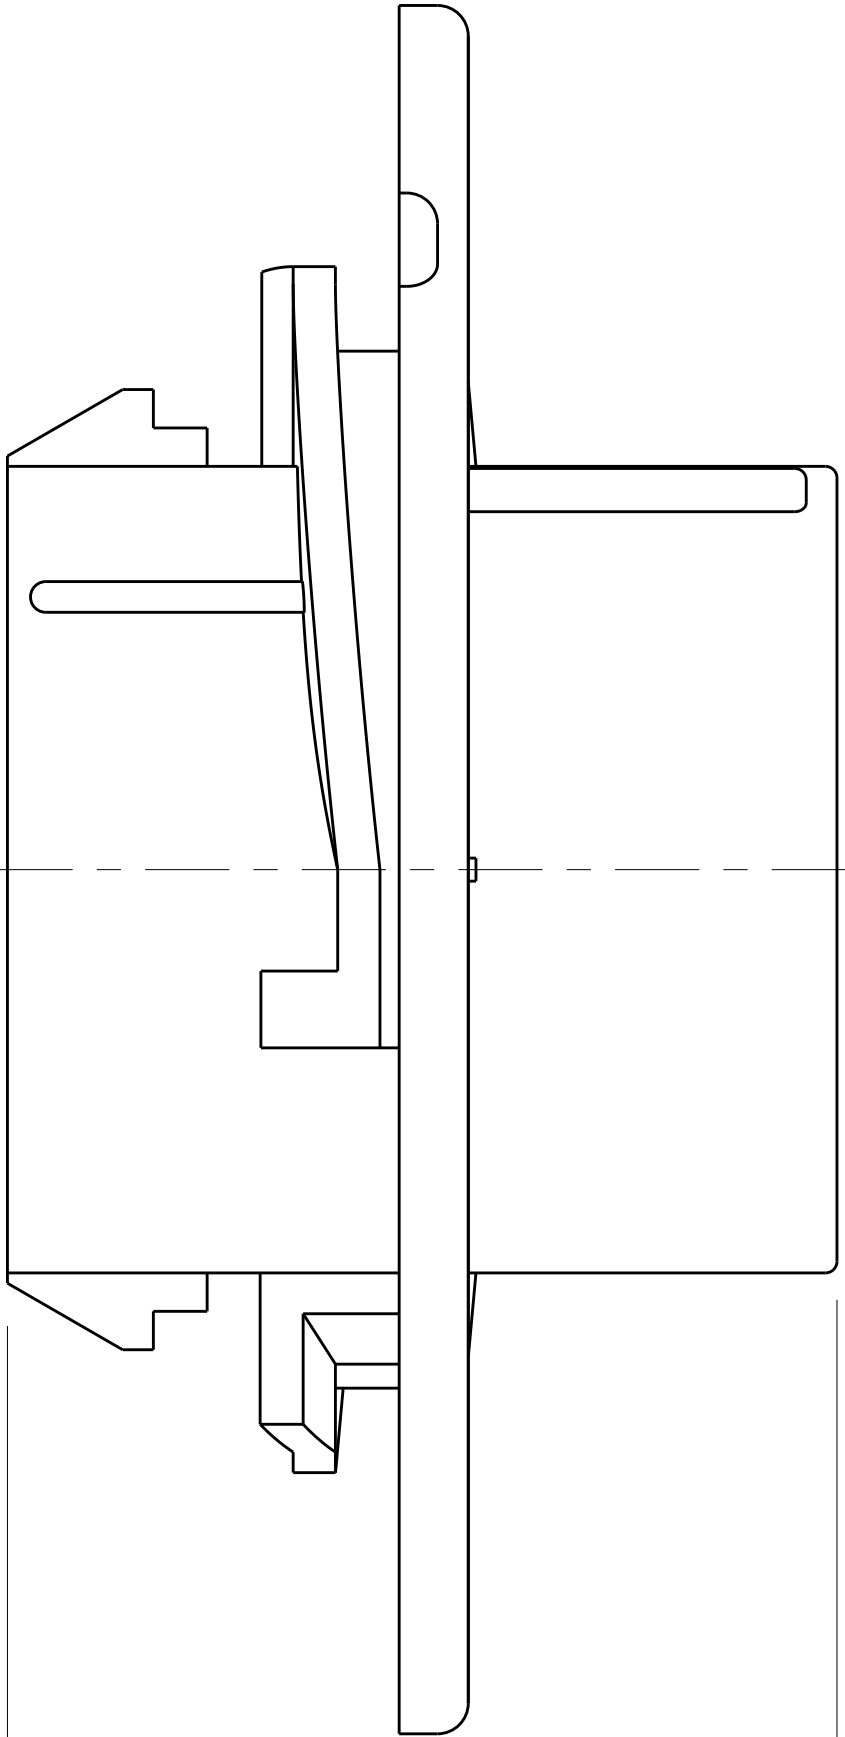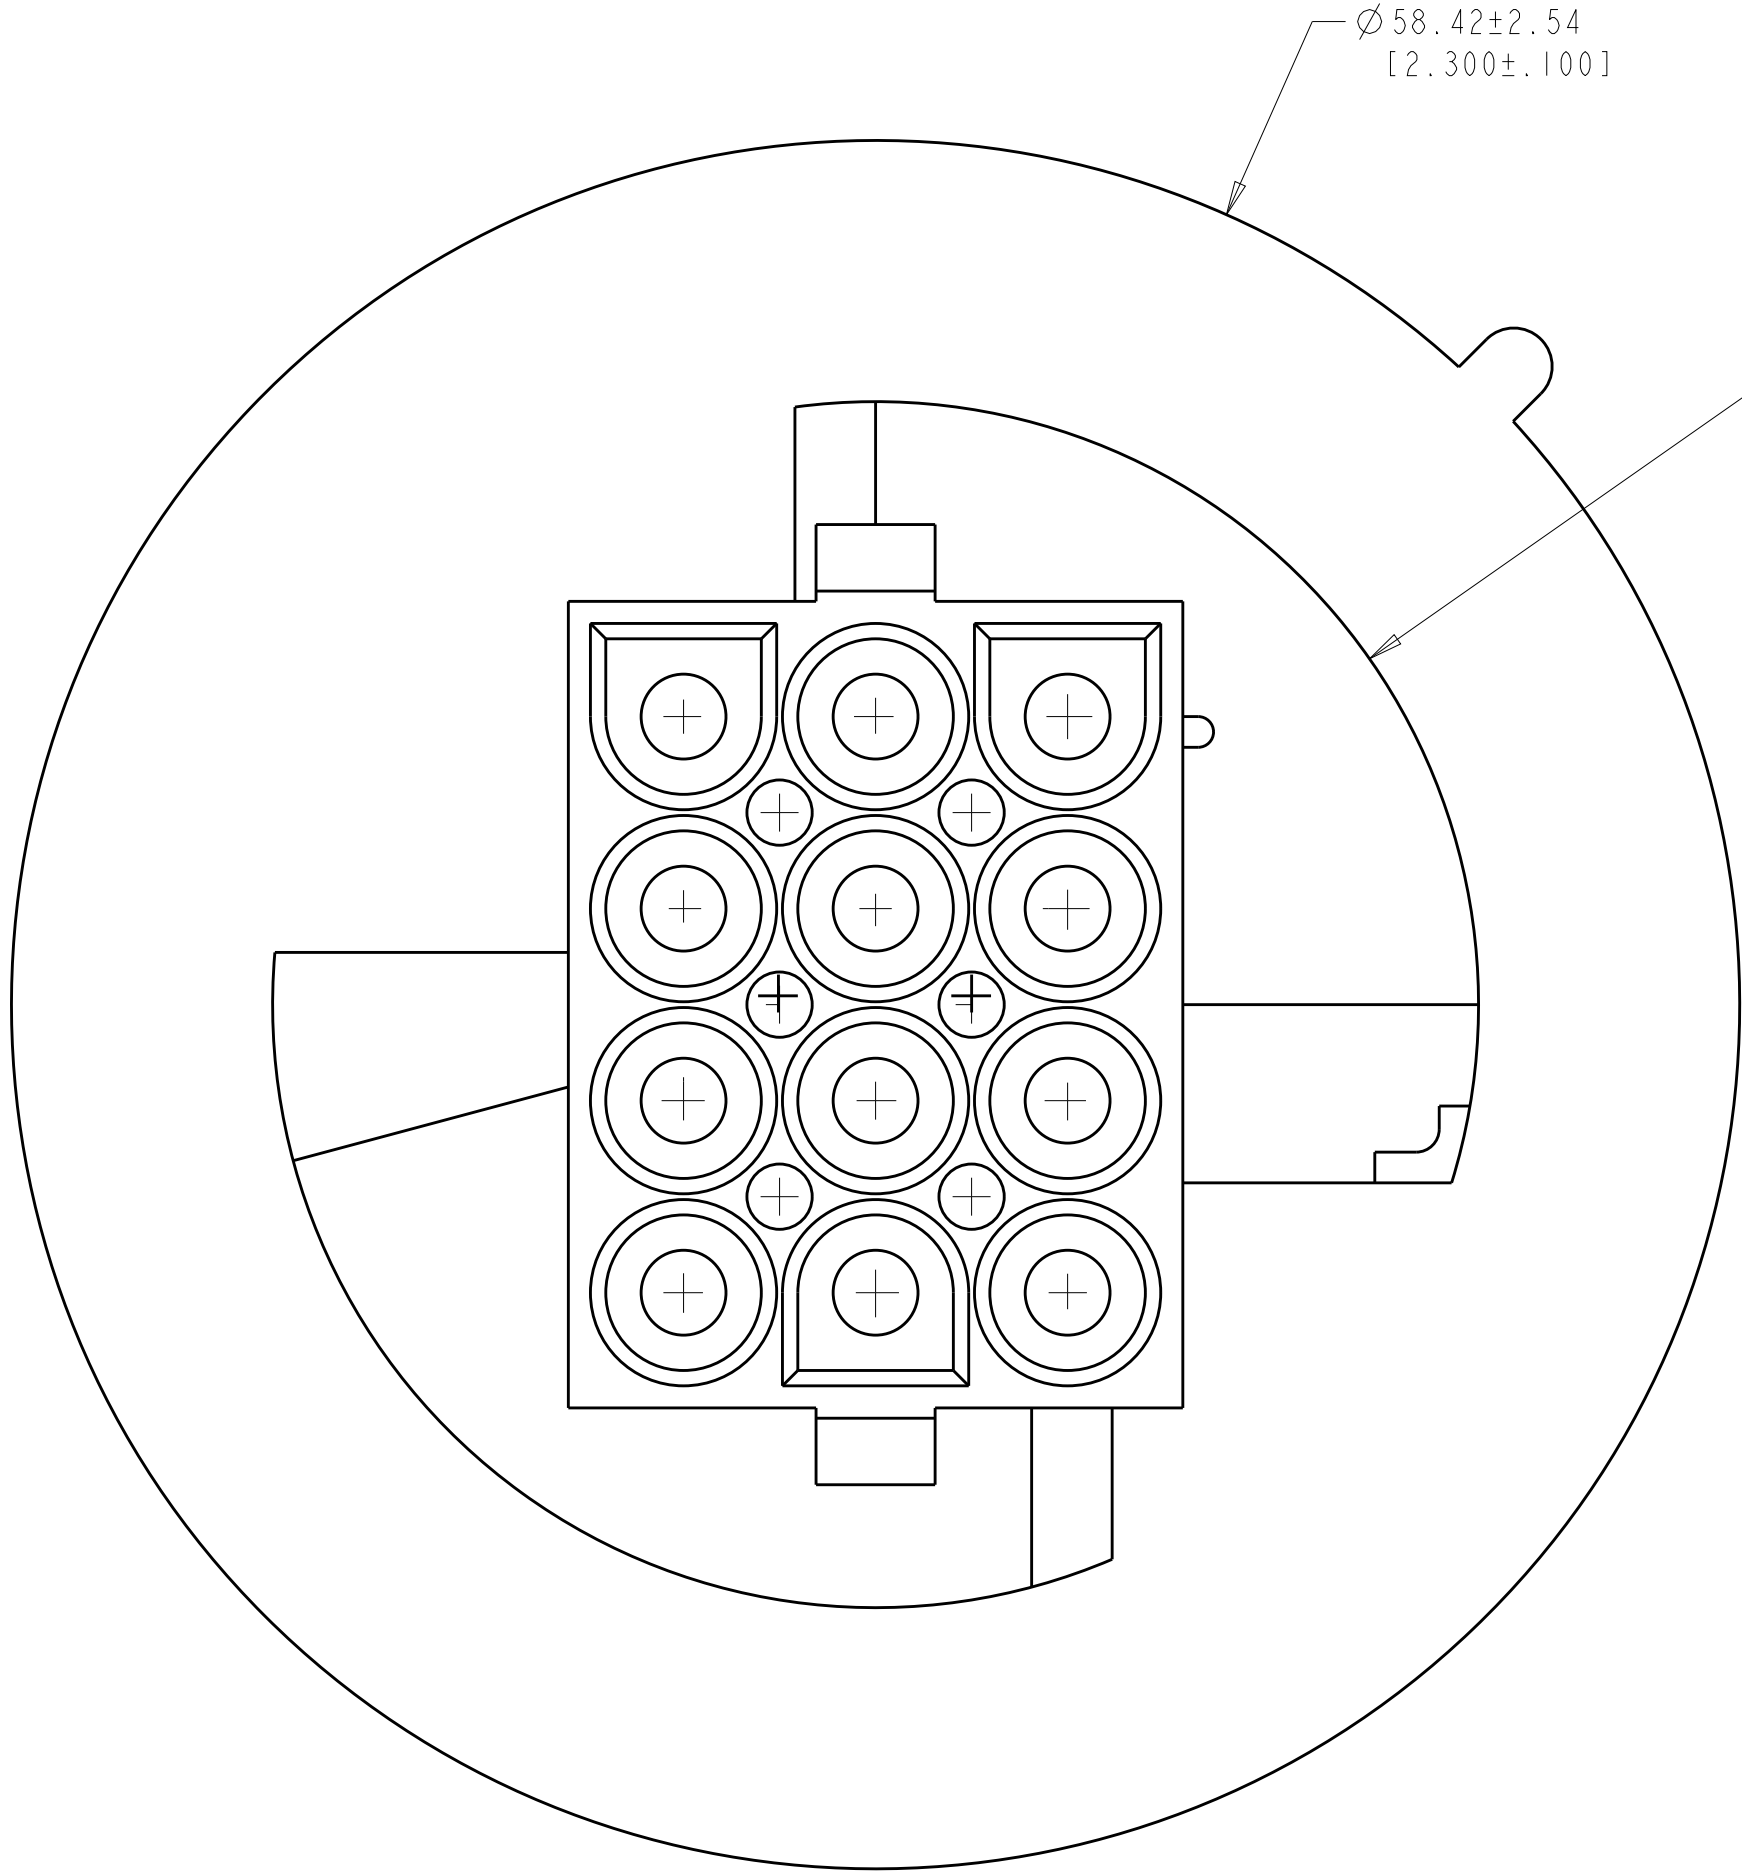

RECOMMENDED CUT OUT
SCALE 2:1



NATURAL	1586854-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	18JUL2007	 TE Connectivity									
DIMENSIONS: mm [INCHES]		CHK D. COLEY	18JUL2007										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY	18JUL2007	NAME									
		PRODUCT SPEC		CAP. 12 CIRCUIT, UNIVERSAL MATE-N-LOK(TM), SPECIAL									
		APPLICATION SPEC											
		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO					
		A1		00779		©=1586854		-					
MATERIAL		WEIGHT		CUSTOMER DRAWING		SCALE		SHEET		OF		REV	
NYLON,		-		-		4:1		1		1		E	
UL 94V-2, NATURAL		-		-		-		-		-		-	