


MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCA-410- CX3	COMPUTER PART No.: 9244 511	TEST PROCEDURE
CUSTOMER/SPECIFICATION: CATALOG ITEM	REV NONE	MSDP-791

TEST REQUIREMENTS

COIL RES.: 290+/-10% ohms OPERATE TIME: 15 mS Max RELEASE TIME: 15 mS Max
 CONTACT MAKE BOUNCE: 1 mS Max N.O. BREAK BOUNCE: N/A
 CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 28 Vdc
 CONTACT RES.: MFG TEST: 8 Milliohms @ 10 mA FINAL TEST: 10 Milliohms @ 10 mA
 CONTACT VOLTAGE DROP: FINAL TEST: 100 mV Max @ 10 A - 6 V dc
 HI-POT: 1250 V rms ALL POINTS, EXCEPT 1000 V rms COIL TO CASE
 INSULATION RESISTANCE: 100 Megohms Min @ 500 V dc
 VIBRATION: N/A
 SEAL TEST: 1X10⁻⁸ Max LEAK RATE COIL TRANSIENT SUPPRESSION: N/A
 OTHER: _____

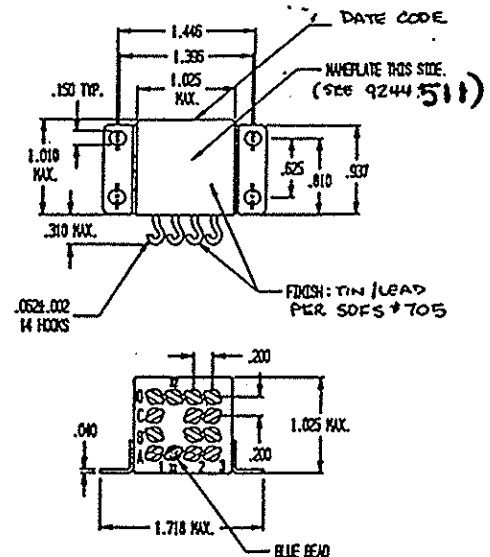

Prepared By: Date		Approved By: Date	
LES WY/NNE 12-16-96			
Rev	ECN No.	Date	
A	96-065	12-16-96	

TERMINAL LETTERS & NUMBERS FOR REFERENCE ONLY.
DOES NOT APPEAR ON RELAY HEADER.

SPECIAL INSTRUCTIONS