
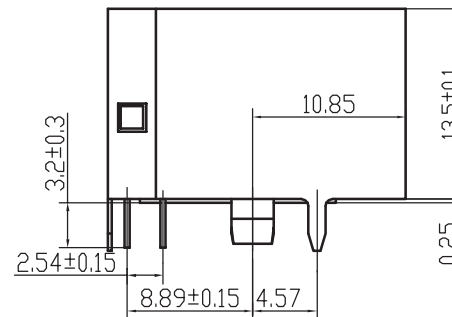
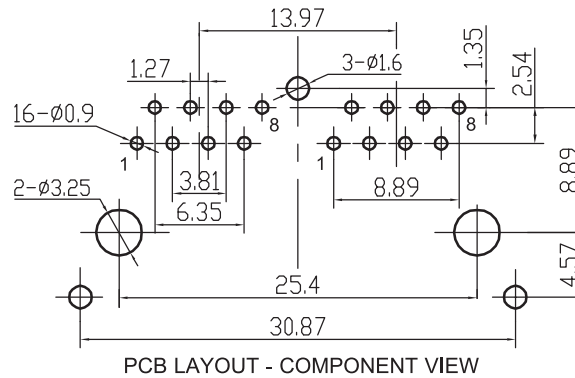


1	2	3	4	5
---	---	---	---	---

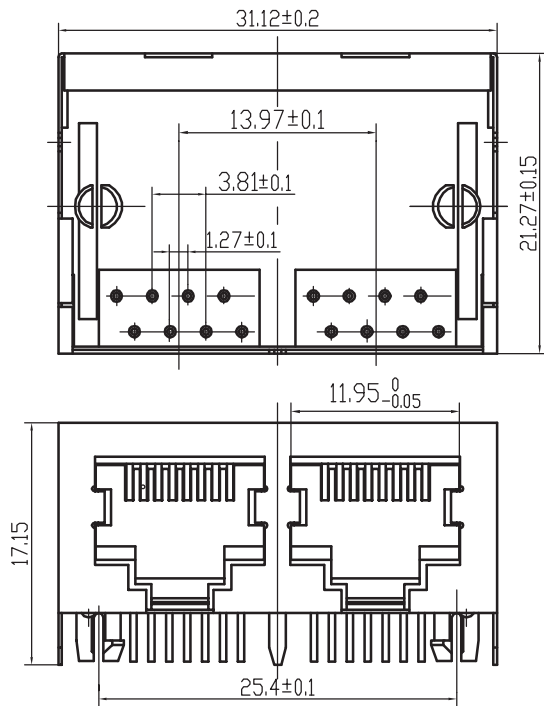

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR MATERIAL: GLASS FILED PBT
 FLAMMABILITY RATING UL94-V0
 COLOUR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: SELECTIVE GOLD
 SHIELDING: BRONZE NI PLATED
 QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 °C UP TO 85 °C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.5 A
 WORKING VOLTAGE: 120 VAC
 INSULATION RESISTANCE: >500 mOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E324776 / MODEL NUMBER 615-HStd

SOLDERING
 WAVE PROCESS ONLY

PACKAGING
 TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 DESCRIPTION: HORIZONTAL SHIELDED DUAL PORT 8P8C MODULAR JACK TAB DOWN WERI PART NO: 615 016 137 621		SIZE A4
G								
F								
E								
D								
C	12-NOV-12	DIM	GG	APPROVAL: RJ	UNIT: MM			
B	06-OCT-09	UL STANDARD	JP		SCALE:			
A	21-NOV-07	PDF	CH		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:			