

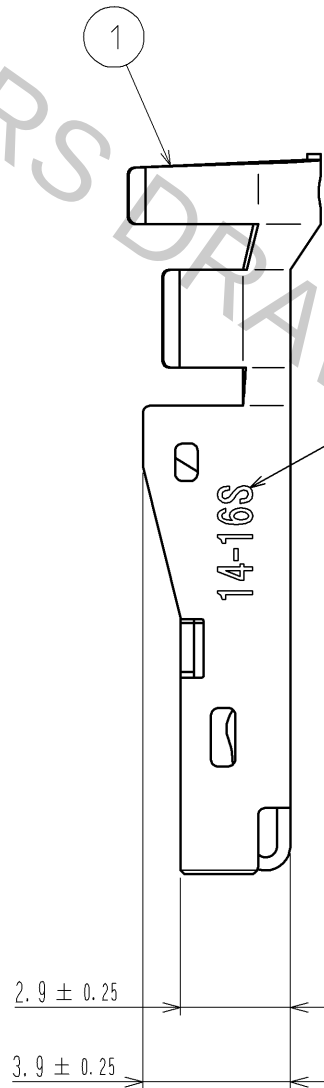
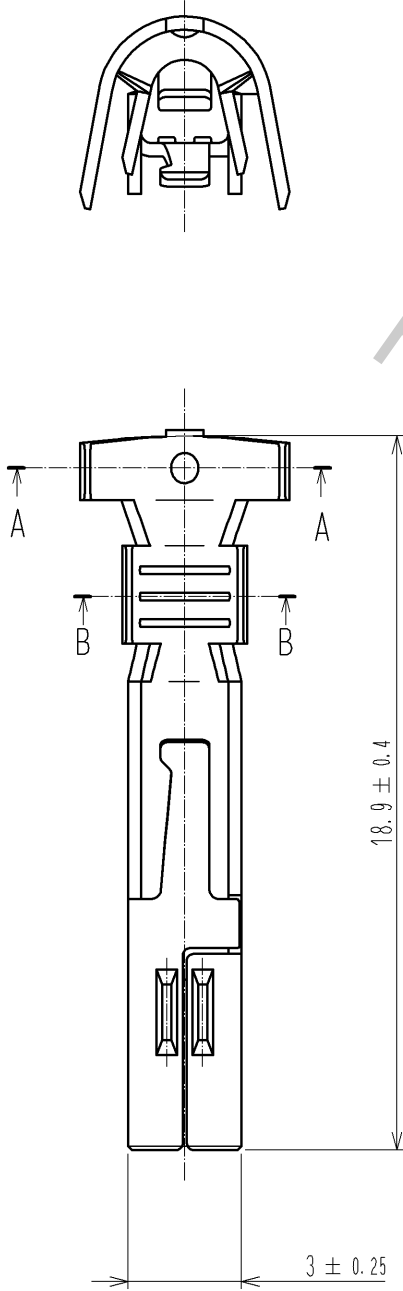
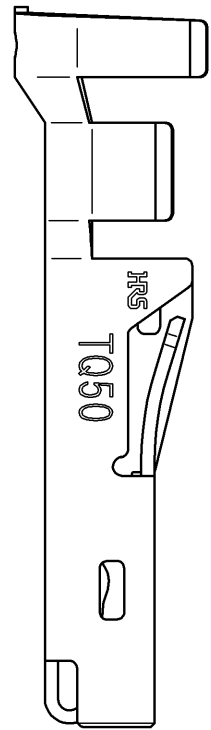


Dec.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

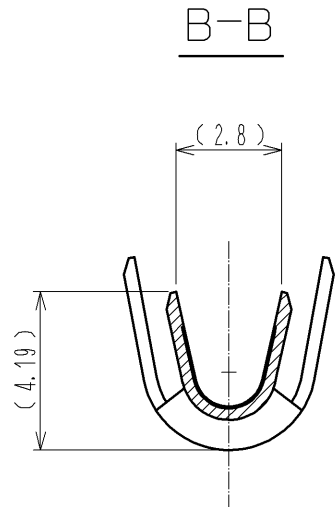

APPLICABLE WIRE

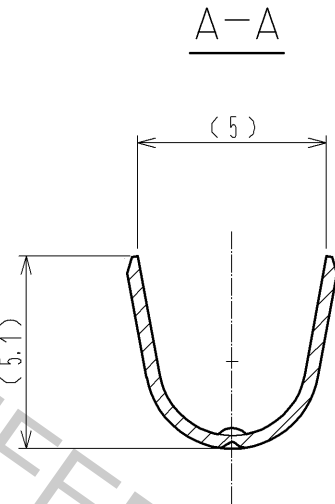

- NOTES 1. APPLICABLE WIRE IS AWG #14~#16. (WV0, WL1)
INSURATION DIAMETER $\phi 3.90\text{mm}$ MAX.
2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS
(CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO
AWG # OR WIRE APPLIED.
3. ONE PACKAGE CONSISTS OF 100 PCS.
4. REFER TO ATAI-E2959 FOR CRIMP QUALITY STANDARDS.

				1	COPPER ALLOY		CONTACT AREA : GOLD PLATING 0.76μm min TERMINAL AREA : TIN PLATING 1μm min UNDER PLATING : NICKEL PLATING 0.5μm min			
NO.	MATERIAL		FINISH , REMARKS			NO.	MATERIAL		FINISH , REMARKS	
UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-E-004910		DESIGNED TY. MIURA		CHECKED NM. NISHIMATSU	DATE 14. 01. 20
 HIROSE ELECTRIC CO. , LTD.			APPROVED : RI. TAKAYASU		12. 12. 11	DRAWING NO. EDC3-128202-00				
			CHECKED : AH. KODAMA		12. 12. 11	PART NO. TQ50-1416SCA				
			DESIGNED : TY. MIURA		12. 12. 10	CODE NO. CL236-3205-6-00				
			DRAWN : TY. MIURA		12. 12. 10	 1 / 1				