


## Accessories Index

|                      |       |
|----------------------|-------|
| • Cable              |       |
| T-Cable .....        | 21-1  |
| Y-Cable .....        | 21-3  |
| • Adaptor            |       |
| T-Adaptor .....      | 21-4  |
| Y-Adaptor .....      | 21-6  |
| I-Adaptor .....      | 21-7  |
| • Cap                |       |
| Dust Cap .....       | 21-9  |
| Waterproof Cap ..... | 21-11 |
| Dummy .....          | 21-18 |
| • Multi-port         |       |
| Multi-port .....     | 21-19 |
| • Box                |       |
| Box .....            | 21-21 |
| • Tool               |       |
| Wrench .....         | 21-22 |
| Unlock Tool .....    | 21-22 |

# Accessories - Cable

## ➤ T-Cable > Circular > Standard Size: 5/8"-27 UNS

■ Customized – Upon Request



5 For connector 1  
6 For connector 2


Choose Connector / Contacts Gender:  
M: Male + Male  
F: Female + Female  
H: Male + Female  
B: Female + Male

\* Choose the cable length: 01-99 m /  
PVC UL2464 Cable

| Current Rating | Contacts<br>2                | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options         |
|----------------|------------------------------|----------------------|-------------------------------------------------|-----------------------------------------------------|----------------------|
|                |                              |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                      |
| 10A            | 02,03,04                     | Screw Thread         | BA-2 2 00-MM0-TSA*                              | BA-2 2 00-FF0-TSA*                                  | BA-2 2 00-5 6 0-TSA* |
|                |                              | 2 point lock bayonet | BA-2 2 00-MM0-TLA*                              | BA-2 2 00-FF0-TLA*                                  | BA-2 2 00-5 6 0-TLA* |
| 5A             | 02,03,04,<br>05,06,07,<br>08 | Screw Thread         | BA-2 2 00-MM0-TSA*                              | BA-2 2 00-FF0-TSA*                                  | BA-2 2 00-5 6 0-TSA* |
|                |                              | 2 point lock bayonet | BA-2 2 00-MM0-TLA*                              | BA-2 2 00-FF0-TLA*                                  | BA-2 2 00-5 6 0-TLA* |
| 2A             | 10,12                        | Screw Thread         | BA-2 2 00-MM0-TSA*                              | BA-2 2 00-FF0-TSA*                                  | BA-2 2 00-5 6 0-TSA* |
|                |                              | 2 point lock bayonet | BA-2 2 00-MM0-TLA*                              | BA-2 2 00-FF0-TLA*                                  | BA-2 2 00-5 6 0-TLA* |

## ➤ T-Cable > Circular > Other Size > Mix Size (10A+5A)

■ Customized – Upon Request




\* Choose the cable length: 01-99 m /  
PVC UL2464 Cable

| Current Rating | Contacts | Mating Style | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | Connector 1<br>(Male Connector / Male Contacts)     |
|----------------|----------|--------------|-------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
|                |          |              | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) | Connector 2<br>(Female Connector / Female Contacts) |
| 5A             | 08       | Screw Thread | GA-080800-MM0-TSA*                              | GA-080800-FF0-TSA*                                  | GA-080800-MF0-TSA*                                  |

## ➤ T-Cable > M Series Sensor > M12

Customized – Upon Request



Choose Connector / Contacts Gender:

- 6 For connector 1
- 7 For connector 2

A/B/D Code

M: Male + Male

F: Female + Female

I Style

K: Connector (Male) + Contact (Male+Female)

Z: Connector (Female) + Contact (Male+Female)


\* Choose the cable length: 01-99 m / PVC UL2464 Cable

| Type             |         | Current Rating | Contacts<br>2 | Mating Style | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options           |
|------------------|---------|----------------|---------------|--------------|-------------------------------------------------|-----------------------------------------------------|------------------------|
|                  |         |                |               |              | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                        |
| M12              | A Code  | 4A             | 03,04,05      | Screw Thread | SS- 2 2 00-MM0-TSA*                             | SS- 2 2 00-FF0-TSA*                                 | SS- 2 2 00- 6 7 0-TSA* |
|                  |         | 2A             | 08            |              | SS-080800-MM0-TSA*                              | SS-080800-FF0-TSA*                                  | SS-080800- 6 7 0-TSA*  |
|                  | B Code  | 4A             | 04,05         |              | SB- 2 2 00-MM0-TSA*                             | SB- 2 2 00-FF0-TSA*                                 | SB- 2 2 00- 6 7 0-TSA* |
|                  | D Code  | 4A             | 04,05         |              | SD- 2 2 00-MM0-TSA*                             | SD- 2 2 00-FF0-TSA*                                 | SD- 2 2 00- 6 7 0-TSA* |
|                  | I Style | 4A             | 05            |              | SI-050500-KK0-TSA*                              | SI-050500-ZZ0-TSA*                                  | SI-050500- 6 7 0-TSA*  |
| M12<br>(Plastic) | A Code  | 4A             | 03,04,05      | Screw Thread | PS- 2 2 00-MM0-TSA*                             | PS- 2 2 00-FF0-TSA*                                 | PS- 2 2 00- 6 7 0-TSA* |
|                  |         | 2A             | 08            |              | PS-080800-MM0-TSA*                              | PS-080800-FF0-TSA*                                  | PS-080800- 6 7 0-TSA*  |
|                  | B Code  | 4A             | 04,05         |              | PB- 2 2 00-MM0-TSA*                             | PB- 2 2 00-FF0-TSA*                                 | PB- 2 2 00- 6 7 0-TSA* |
|                  | D Code  | 4A             | 04,05         |              | PD- 2 2 00-MM0-TSA*                             | PD- 2 2 00-FF0-TSA*                                 | PD- 2 2 00- 6 7 0-TSA* |
|                  | I Style | 4A             | 05            |              | PI-050500-KK0-TSA*                              | PI-050500-ZZ0-TSA*                                  | PI-050500- 6 7 0-TSA*  |

\* Design and specification are subject to change without notice.

Y-Cable > M Series Sensor > M12

Customized – Upon Request




\* Choose the cable length:01-99 m / PU VW-1 Cable

| Type |         | Current Rating | Contacts<br>② | Mating Style | Connector<br>(Male Connector / Male Contacts) | Connector<br>(Female Connector / Female Contacts) |
|------|---------|----------------|---------------|--------------|-----------------------------------------------|---------------------------------------------------|
| M12  | A Code  | 4A             | 03,04,05      | Screw Thread | SS- ② 0000-M00-YSB*                           | SS- ② 0000-F00-YSB*                               |
|      |         | 2A             | 08            | Screw Thread | SS-080000-M00-YSB*                            | SS-080000-F00-YSB*                                |
|      | B Code  | 4A             | 04,05         | Screw Thread | SB- ② 0000-M00-YSB*                           | SB- ② 0000-F00-YSB*                               |
|      | D Code  | 4A             | 04,05         | Screw Thread | SD- ② 0000-M00-YSB*                           | SD- ② 0000-F00-YSB*                               |
|      | I Style | 4A             | 05            | Screw Thread | SI-050000-K00-YSB*                            | SI-050000-Z00-YSB*                                |

## Accessories - Adaptor

### └ T-Adaptor > Circular > Mini Size: 7/16"-28 UNS

Customized – Upon Request




5 For connector 1  
6 For connector 2  
7 For connector 3

Choose Connector / Contacts Gender:  
M: Male + Male  
F: Female + Female

| Current Rating | Contacts<br>2 | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options           |
|----------------|---------------|----------------------|-------------------------------------------------|-----------------------------------------------------|------------------------|
|                |               |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                        |
|                |               |                      | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Female Connector / Female Contacts) |                        |
| 5A             | 02,03         | Screw Thread         | AA-2 2 2 -MMM-TS001                             | AA-2 2 2 -FFF-TS001                                 | AA-2 2 2 -5 6 7 -TS001 |
|                |               | 2 point lock bayonet | AA-2 2 2 -MMM-TL001                             | AA-2 2 2 -FFF-TL001                                 | AA-2 2 2 -5 6 7 -TL001 |
| 2A             | 04,05,06      | Screw Thread         | AA-2 2 2 -MMM-TS001                             | AA-2 2 2 -FFF-TS001                                 | AA-2 2 2 -5 6 7 -TS001 |
|                |               | 2 point lock bayonet | AA-2 2 2 -MMM-TL001                             | AA-2 2 2 -FFF-TL001                                 | AA-2 2 2 -5 6 7 -TL001 |

### └ T-Adaptor > Circular > Standard Size: 5/8"-27 UNS

Customized – Upon Request



5 For connector 1  
6 For connector 2  
7 For connector 3

Choose Connector / Contacts Gender:  
M: Male + Male  
F: Female + Female  
H: Male + Female  
B: Female + Male

\* Choose the cable length: 01-99 m /  
PVC UL2464 Cable

| Current Rating | Contacts<br>2                | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options           |
|----------------|------------------------------|----------------------|-------------------------------------------------|-----------------------------------------------------|------------------------|
|                |                              |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                        |
|                |                              |                      | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Female Connector / Female Contacts) |                        |
| 5A             | 02,03,04,<br>05,06,07,<br>08 | Screw Thread         | BA-2 2 2 -MMM-TS001                             | BA-2 2 2 -FFF-TS001                                 | BA-2 2 2 -5 6 7 -TS001 |
|                |                              | 2 point lock bayonet | BA-2 2 2 -MMM-TL001                             | BA-2 2 2 -FFF-TL001                                 | BA-2 2 2 -5 6 7 -TL001 |
| 2A             | 10,12                        | Screw Thread         | BA-2 2 2 -MMM-TS001                             | BA-2 2 2 -FFF-TS001                                 | BA-2 2 2 -5 6 7 -TS001 |
|                |                              | 2 point lock bayonet | BA-2 2 2 -MMM-TL001                             | BA-2 2 2 -FFF-TL001                                 | BA-2 2 2 -5 6 7 -TL001 |

\* Design and specification are subject to change without notice.

## ▸ T-Adaptor > M Series Sensor > M12

Customized – Upon Request

Choose Connector / Contacts Gender:

5 For connector 1

6 For connector 2

7 For connector 3

A/B/D Code

M: Male + Male

F: Female + Female

I Style

K: Connector (Male) + Contact (Male+Female)

Z: Connector (Female) + Contact (Male+Female)

| Type             |         | Current Rating | Contacts<br>2 | Mating Style | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options            |
|------------------|---------|----------------|---------------|--------------|-------------------------------------------------|-----------------------------------------------------|-------------------------|
|                  |         |                |               |              | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                         |
|                  |         |                |               |              | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Female Connector / Female Contacts) |                         |
| M12              | A Code  | 4A             | 03,04,05      | Screw Thread | SS- 2 2 2 -MMM-TS001                            | SS- 2 2 2 -FFF-TS001                                | SS- 2 2 2 -5 6 7 -TS001 |
|                  |         | 2A             | 08            | Screw Thread | SS-080808-MMM-TS001                             | SS-080808-FFF-TS001                                 | SS-080808- 5 6 7 -TS001 |
|                  | B Code  | 4A             | 04,05         | Screw Thread | SB- 2 2 2 -MMM-TS001                            | SB- 2 2 2 -FFF-TS001                                | SB- 2 2 2 -5 6 7 -TS001 |
|                  | D Code  | 4A             | 04,05         | Screw Thread | SD- 2 2 2 -MMM-TS001                            | SD- 2 2 2 -FFF-TS001                                | SD- 2 2 2 -5 6 7 -TS001 |
|                  | I Style | 4A             | 05            | Screw Thread | SI-050505-KKK-TS001                             | SI-050505-ZZZ-TS001                                 | SI-050505- 5 6 7 -TS001 |
| M12<br>(Plastic) | A Code  | 4A             | 03,04,05      | Screw Thread | PS- 2 2 2 -MMM-TS001                            | PS- 2 2 2 -FFF-TS001                                | PS- 2 2 2 -5 6 7 -TS001 |
|                  |         | 2A             | 08            | Screw Thread | PS-080808-MMM-TS001                             | PS-080808-FFF-TS001                                 | PS-080808- 5 6 7 -TS001 |
|                  | B Code  | 4A             | 04,05         | Screw Thread | PB- 2 2 2 -MMM-TS001                            | PB- 2 2 2 -FFF-TS001                                | PB- 2 2 2 -5 6 7 -TS001 |
|                  | D Code  | 4A             | 04,05         | Screw Thread | PD- 2 2 2 -MMM-TS001                            | PD- 2 2 2 -FFF-TS001                                | PD- 2 2 2 -5 6 7 -TS001 |
|                  | I Style | 4A             | 05            | Screw Thread | PI-050505-KKK-TS001                             | PI-050505-ZZZ-TS001                                 | PI-050505- 5 6 7 -TS001 |

## Y-Adaptor > M Series Sensor > M12

Customized – Upon Request

Choose Connector / Contacts Gender:

5

 For connector 1
 

6

 For connector 2
 

7

 For connector 3

A/B/D Code

M: Male + Male

F: Female + Female

I Style

K: Connector (Male) + Contact (Male+Female)


Z: Connector (Female) + Contact (Male+Female)

| Type             |         | Current Rating | Contacts<br>2 | Mating Style | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | More options        |
|------------------|---------|----------------|---------------|--------------|-------------------------------------------------|-----------------------------------------------------|---------------------|
|                  |         |                |               |              | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) |                     |
|                  |         |                |               |              | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Female Connector / Female Contacts) |                     |
| M12              | A Code  | 4A             | 03,04,05      | Screw Thread | SS-222-MMM-YS001                                | SS-222-FFF-YS001                                    | SS-222-567-YS001    |
|                  |         | 2A             | 08            | Screw Thread | SS-080808-MMM-YS001                             | SS-080808-FFF-YS001                                 | SS-080808-567-YS001 |
|                  | B Code  | 4A             | 04,05         | Screw Thread | SB-222-MMM-YS001                                | SB-222-FFF-YS001                                    | SB-222-567-YS001    |
|                  | D Code  | 4A             | 04,05         | Screw Thread | SD-222-MMM-YS001                                | SD-222-FFF-YS001                                    | SD-222-567-YS001    |
|                  | I Style | 4A             | 05            | Screw Thread | SI-050505-KKK-YS001                             | SI-050505-ZZZ-YS001                                 | SI-050505-567-YS001 |
| M12<br>(Plastic) | A Code  | 4A             | 03,04,05      | Screw Thread | PS-222-MMM-YS001                                | PS-222-FFF-YS001                                    | PS-222-567-YS001    |
|                  |         | 2A             | 08            | Screw Thread | PS-080808-MMM-YS001                             | PS-080808-FFF-YS001                                 | PS-080808-567-YS001 |
|                  | B Code  | 4A             | 04,05         | Screw Thread | PB-222-MMM-YS001                                | PB-222-FFF-YS001                                    | PB-222-567-YS001    |
|                  | D Code  | 4A             | 04,05         | Screw Thread | PD-222-MMM-YS001                                | PD-222-FFF-YS001                                    | PD-222-567-YS001    |
|                  | I Style | 4A             | 05            | Screw Thread | PI-050505-KKK-YS001                             | PI-050505-ZZZ-YS001                                 | PI-050505-567-YS001 |

\* Design and specification are subject to change without notice.

## I-Adaptor > Circular > Mini Size: 7/16"-28 UNS

 Customized – Upon Request

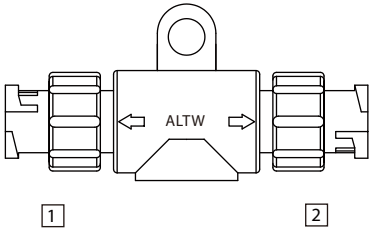

 For connector 1  
 For connector 2

Choose Connector / Contacts Gender:


M: Male + Male

F: Female + Female

| Current Rating | Contacts<br> | Mating Style         | Connector 1<br>(Male Connector / Male Contacts)                                                                                                                                      | Connector 1<br>(Female Connector / Female Contacts)                                                                                                                                  | More options                                                                                                                                                                                                                                                                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                                                               |                      | Connector 2<br>(Male Connector / Male Contacts)                                                                                                                                      | Connector 2<br>(Female Connector / Female Contacts)                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                            |
| 5A             | 02,03                                                                                         | Screw Thread         | AA-00   -0MM-IS001 | AA-00   -0FF-IS001 | AA-00   -0   IS001 |
|                |                                                                                               | 2 point lock bayonet | AA-00   -0MM-IL001 | AA-00   -0FF-IL001 | AA-00   -0   IL001 |
| 2A             | 04,05,06                                                                                      | Screw Thread         | AA-00   -0MM-IS001 | AA-00   -0FF-IS001 | AA-00   -0   IS001 |
|                |                                                                                               | 2 point lock bayonet | AA-00   -0MM-IL001 | AA-00   -0FF-IL001 | AA-00   -0   IL001 |

## I-Adaptor > Circular > Standard Size: 5/8"-27 UNS

 Customized – Upon Request



 For connector 1  
 For connector 2

Choose Connector / Contacts Gender:

M: Male + Male

F: Female + Female


H: Male + Female

B: Female + Male

| Current Rating | Contacts<br> | Mating Style         | Connector 1<br>(Male Connector / Male Contacts)                                                                                                                                          | Connector 1<br>(Female Connector / Female Contacts)                                                                                                                                      | More options                                                                                                                                                                                                                                                                                                                                                       |
|----------------|-------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                |                                                                                                 |                      | Connector 2<br>(Male Connector / Male Contacts)                                                                                                                                          | Connector 2<br>(Female Connector / Female Contacts)                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                    |
| 5A             | 02,03,04,<br>05,06,07,<br>08                                                                    | Screw Thread         | BA-00   -0MM-IS001 | BA-00   -0FF-IS001 | BA-00   -0   IS001 |
|                |                                                                                                 | 2 point lock bayonet | BA-00   -0MM-IL001 | BA-00   -0FF-IL001 | BA-00   -0   IL001 |
| 2A             | 10,12                                                                                           | Screw Thread         | BA-00   -0MM-IS001 | BA-00   -0FF-IS001 | BA-00   -0   IS001 |
|                |                                                                                                 | 2 point lock bayonet | BA-00   -0MM-IL001 | BA-00   -0FF-IL001 | BA-00   -0   IL001 |

## └ I-Adaptor > Circular > Other Size > Mix Size (10A+5A)


Customized – Upon Request

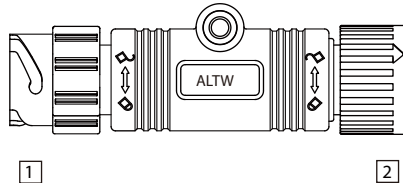

| Current Rating | Contacts | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts) | Connector 1<br>(Female Connector / Female Contacts) |
|----------------|----------|----------------------|-------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
|                |          |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Female Connector / Female Contacts) | Connector 1<br>(Male Connector / Male Contacts)     |
| 5A             | 08       | 3 point lock bayonet | GA-000808-0MM-IT001                             | GA-000808-OFF-IT001                                 | GA-000808-0FM-IT001                                 |

## └ I-Adaptor > M Series Sensor > M12

Customized – Upon Request



\* M12

Choose Connector / Contacts Gender:

6 For connector 1

7 For connector 2

A/B/D Code

M: Male + Male

F: Female + Female

I Style

K: Connector (Male) + Contact (Male+Female)


Z: Connector (Female) + Contact (Male+Female)

| Type             |         | Current Rating | Contacts<br>3 | Mating Style | Connector 1<br>(Male Connector / Male Contacts)<br>Connector 2<br>(Male Connector / Male Contacts) | Connector 1<br>(Female Connector / Female Contacts)<br>Connector 2<br>(Female Connector / Female Contacts) | More options                               |
|------------------|---------|----------------|---------------|--------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| M12              | A Code  | 4A             | 03,04,05      | Screw Thread | SS-00 3 3 -0MM-IS001                                                                               | SS-00 3 3 -OFF-IS001                                                                                       | SS-00 3 3 -0 6 7 IS001                     |
|                  |         | 2A             | 08            | Screw Thread | SS-000808-0MM-IS001                                                                                | SS-000808-OFF-IS001                                                                                        | SS-000808-0 6 7 IS001                      |
|                  | B Code  | 4A             | 04,05         | Screw Thread | SB-00 3 3 -0MM-IS001                                                                               | SB-00 3 3 -OFF-IS001                                                                                       | SB-00 3 3 -0 6 7 IS001                     |
|                  | D Code  | 4A             | 04,05         | Screw Thread | SD-00 3 3 -0MM-IS001                                                                               | SD-00 3 3 -OFF-IS001                                                                                       | SD-00 3 3 -0 6 7 IS001                     |
|                  | I Style | 4A             | 05            | Screw Thread | SI-000505-0KK-IS001                                                                                | SI-000505-0ZZ-IS001                                                                                        | SI-000505-0KZ-IS001<br>SI-000505-0ZK-IS001 |
| M12<br>(Plastic) | A Code  | 4A             | 03,04,05      | Screw Thread | PS-00 3 3 -0MM-IS001                                                                               | PS-00 3 3 -OFF-IS001                                                                                       | PS-00 3 3 -0 6 7 IS001                     |
|                  |         | 2A             | 08            | Screw Thread | PS-000808-0MM-IS001                                                                                | PS-000808-OFF-IS001                                                                                        | PS-000808-0 6 7 IS001                      |
|                  | B Code  | 4A             | 04,05         | Screw Thread | PB-00 3 3 -0MM-IS001                                                                               | PB-00 3 3 -OFF-IS001                                                                                       | PB-00 3 3 -0 6 7 IS001                     |
|                  | D Code  | 4A             | 04,05         | Screw Thread | PD-00 3 3 -0MM-IS001                                                                               | PD-00 3 3 -OFF-IS001                                                                                       | PD-00 3 3 -0 6 7 IS001                     |
|                  | I Style | 4A             | 05            | Screw Thread | PI-000505-0KK-IS001                                                                                | PI-000505-0ZZ-IS001                                                                                        | PI-000505-0KZ-IS001<br>PI-000505-0ZK-IS001 |

\* Design and specification are subject to change without notice.



Accessories - Cap

Dust Cap >Circular

| <div><div></div> Customized – Upon Request</div> <div><div></div><div></div></div> <div><div>* Mini Size   Standard Size   Middle Size   Large Size</div><div>* With Rubber Lead</div><div>* Mix Size</div><div>* With Rubber Lead</div></div> |                       |                      |                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|----------------------------------------------|
| Size                                                                                                                                                                                                                                                                                                                                                                                                              | Mating Pair           | Mating Pair (Gender) | P/N                                          |
| Mini Size<br>7/16"-28 UNS                                                                                                                                                                                                                                                                                                                                                                                         | Receptacle            | Male                 | CAP-DAAMDPC1                                 |
| Standard Size<br>5/8"-27 UNS                                                                                                                                                                                                                                                                                                                                                                                      | Receptacle            | Male                 | CAP-DABMDPC1<br>CAP-DABMDPC2<br>CAP-DABMDPC3 |
|                                                                                                                                                                                                                                                                                                                                                                                                                   |                       | Female               | -                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                   | Overmolded with Cable | Male                 | CAP-DABMDCC1<br>CAP-DABMDCC2                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                   |                       | Female               | CAP-DABFDCC1                                 |
| Middle Size<br>13/16"-28 UNS                                                                                                                                                                                                                                                                                                                                                                                      | Receptacle            | Male                 | CAP-DACMDPC1<br>CAP-DACMDPC2                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                   | Overmolded with Cable | Female               | CAP-DACFDCC1                                 |
| Large Size<br>1"-20 UNEF                                                                                                                                                                                                                                                                                                                                                                                          | Receptacle            | Male                 | CAP-DADMDPC1                                 |
| Mix Size 12-5A                                                                                                                                                                                                                                                                                                                                                                                                    | Receptacle            | Male                 | CAP-DPLMDPC1                                 |

## [Dust Cap](#) > D-SUB > Standard & High Density

■ Customized – Upon Request






\*Choose rubber lead: Vertical type (1) / Horizontal type (2)

| Type               |                        | Mating Pairs                                                                     | Mating Pair (Gender) | P/N                            |
|--------------------|------------------------|----------------------------------------------------------------------------------|----------------------|--------------------------------|
| Standard D-SUB     | High Density D-SUB     |                                                                                  |                      |                                |
| Standard (9 pins)  | High Density (15 Pins) | Receptacle<br>(With horizontal rubber lead)                                      | Male                 | CAP-DD1MDPC2                   |
|                    |                        | Receptacle and Overmolded with Cable<br>(With horizontal / Vertical rubber lead) |                      | CAP-DD1MDMA1                   |
|                    |                        | Receptacle                                                                       | Female               | CAP-DD1FDPC1*<br>CAP-DD1FDPC2* |
|                    |                        | Receptacle and Overmolded with Cable                                             |                      | CAP-DD1FDMA1                   |
| Standard (15 pins) | High Density (26 Pins) | Receptacle and Overmolded with Cable                                             | Male                 | CAP-DD2MDMA1                   |
|                    |                        | Receptacle and Overmolded with Cable                                             | Female               | CAP-DD2FDMA1                   |
| Standard (25 pins) | High Density (44 Pins) | Receptacle and Overmolded with Cable                                             | Male                 | CAP-DD3MDMA1                   |
|                    |                        | Receptacle<br>(With horizontal rubber lead)                                      | Female               | CAP-DD3FDPC1                   |
|                    |                        | Receptacle and Overmolded with Cable                                             |                      | CAP-DD3FDMA1                   |


\* Design and specification are subject to change without notice.

## Waterproof Cap > Circular


| Customized – Upon Request                                                                                                                                                                                                                                                                                                                                  |                                      |                      |                      |                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------------------|----------------------|----------------|
| <div>    </div> <div> <div>* Mini Size</div> <div>* Standard Size</div> <div>* Middle Size</div> </div> |                                      |                      |                      |                |
| Choose Connector / Contacts Gender:<br>6 More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)<br>7 * Mini Size: Choose 2 contacts(1) / 3 contacts(3) / 4~6 contacts(2) for male mating pair<br>* Standard Size: Choose 12 contacts (2) for male mating pair<br>* Middle Size: Choose plastic(1) or metal(2) items             |                                      |                      |                      |                |
| Size                                                                                                                                                                                                                                                                                                                                                       | Mating Pair                          | Mating Style         | Mating Pair (Gender) | P/N            |
| Mini Size<br>7/16"-28 UNS                                                                                                                                                                                                                                                                                                                                  | Receptacle                           | Screw Thread         | Male                 | CAP-WAAMSP 6 1 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WAAML 6 7  |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WAAFLP 6 7 |
|                                                                                                                                                                                                                                                                                                                                                            | Overmolded with Cable                | Screw Thread         | Male                 | CAP-WAAMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WAAMLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WAAFLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            | Receptacle and Overmolded with Cable | Screw Thread         | Male                 | CAP-WAAMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WAAMLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WAAFLMA 7  |
| Standard Size<br>5/8"-27 UNS                                                                                                                                                                                                                                                                                                                               | Receptacle                           | Screw Thread         | Male                 | CAP-WABMSP 6 1 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFSP 6 1 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WABMLP 6 7 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFLP 6 7 |
|                                                                                                                                                                                                                                                                                                                                                            | Overmolded with Cable                | Screw Thread         | Male                 | CAP-WABMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WABMLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            | Receptacle and Overmolded with Cable | Screw Thread         | Male                 | CAP-WABMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WABMLMA 7  |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WABFLMA 7  |
| Middle Size<br>13/16"-28 UNS                                                                                                                                                                                                                                                                                                                               | Receptacle                           | Screw Thread         | Male                 | CAP-WACMSP 6 7 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WACMLP 6 1 |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WACFLP 6 1 |
|                                                                                                                                                                                                                                                                                                                                                            | Overmolded with Cable                | Screw Thread         | Male                 | CAP-WACMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WACMLMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WACFLMA1   |
|                                                                                                                                                                                                                                                                                                                                                            | Receptacle and Overmolded with Cable | Screw Thread         | Male                 | CAP-WACMSMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      | 2 point lock bayonet | Male                 | CAP-WACMLMA1   |
|                                                                                                                                                                                                                                                                                                                                                            |                                      |                      | Female               | CAP-WACFLMA1   |

## Waterproof Cap > Circular

Customized – Upon Request



\* Large Size



\* Mix Size


⑥ More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

⑦ \* Large Size: Choose 18 contacts(2) for female mating pair


| Size                                            | Mating Pair                             | Mating Style         | Mating Pair (Gender) | P/N            |
|-------------------------------------------------|-----------------------------------------|----------------------|----------------------|----------------|
| Large Size<br>1"-20 UNEF                        | Receptacle                              | Screw Thread         | Male                 | CAP-WADMSP ⑥ 1 |
|                                                 |                                         | 2 point lock bayonet | Male                 | CAP-WADMLP ⑥ ⑦ |
|                                                 |                                         |                      | Female               | CAP-WADFLP ⑥ ⑦ |
|                                                 | Overmolded with Cable                   | Screw Thread         | -                    | -              |
|                                                 |                                         | 2 point lock bayonet | -                    | -              |
|                                                 | Receptacle and<br>Overmolded with Cable | Screw Thread         | Male                 | CAP-WADMSMA1   |
|                                                 |                                         | 2 point lock bayonet | Male                 | CAP-WADMLMA ⑦  |
|                                                 |                                         |                      | Female               | CAP-WADFLMA ⑦  |
| Mix Size<br>(Between Standard<br>& Middle Size) | Receptacle                              | 3 Points Lock        | Male                 | CAP-WEBMLP ⑥ 1 |
|                                                 |                                         |                      | Female               | CAP-WEBFLP ⑥ 1 |
|                                                 | Receptacle and<br>Overmolded with Cable | 3 Points Lock        | Male                 | CAP-WEBMLMA1   |
|                                                 |                                         |                      | Female               | CAP-WEBFLMA1   |

### Waterproof Cap > Power


Customized – Upon Request



\* 8A (PWE) | 12A (PWF) | 16A (PWG)



\* 20A (PWC) | 20A+2A (PWCU)




\* 25A (PWH) | 30A (PWJ)

6 More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

| Current Rating | Mating Pair                          | Mating Style         | Mating Pair (Gender) | P/N            |
|----------------|--------------------------------------|----------------------|----------------------|----------------|
| 8A(PWE)        | Receptacle                           | Screw Thread         | Male                 | CAP-WTAM5P 6 1 |
|                | Receptacle and Overmolded with Cable |                      | Female               | CAP-WTAFSP 6 1 |
|                |                                      |                      | Male                 | CAP-WTAM5MA1   |
|                |                                      |                      | Female               | CAP-WTAFSMA1   |
| 12A(PWF)       | Receptacle                           | Screw Thread         | Male                 | CAP-WTAM5P 6 1 |
|                | Receptacle and Overmolded with Cable |                      | Female               | CAP-WTAFSP 6 1 |
|                |                                      |                      | Male                 | CAP-WTAM5MA1   |
|                |                                      |                      | Female               | CAP-WTAFSMA1   |
| 16A(PWG)       | Receptacle                           | Screw Thread         | Male                 | CAP-WTAM5P 6 1 |
|                | Receptacle and Overmolded with Cable |                      | Female               | CAP-WTAFSP 6 1 |
|                |                                      |                      | Male                 | CAP-WTAM5MA1   |
|                |                                      |                      | Female               | CAP-WTAFSMA1   |
| 20A(PWC)       | Receptacle                           | 2 point lock bayonet | Male                 | CAP-WACMLP 6 1 |
|                | Receptacle and Overmolded with Cable |                      |                      | CAP-WACMLMA1   |
|                | Receptacle and Overmolded with Cable |                      | Female               | CAP-WACFLMA2   |
| 20A+2A(PWCU)   | Receptacle                           | 2 point lock bayonet | Male                 | CAP-WACMLP 6 1 |
|                | Receptacle and Overmolded with Cable |                      |                      | CAP-WACMLMA1   |
|                | Receptacle and Overmolded with Cable |                      | Female               | CAP-WACFLMA2   |
| 25A(PWH)       | Receptacle and Overmolded with Cable | 3 point lock bayonet | Female               | CAP-WPWFTMD1   |
| 30A(PWJ)       | Receptacle and Overmolded with Cable | 3 point lock bayonet | Male                 | CAP-WPWMTMD1   |

## Waterproof Cap > Sensor > M8

Customized – Upon Request




For Female

| Size | Mating Pair                          | Mating Style | Mating Pair (Gender) | P/N          |
|------|--------------------------------------|--------------|----------------------|--------------|
| M8   | Overmolded with Cable                | Screw Thread | Female               | CAP-WBBFSCC1 |
|      | Receptacle and Overmolded with Cable | Screw Thread | Male                 | CAP-WBBMSMA1 |
|      |                                      |              | Female               | CAP-WBBFSMA1 |

## Waterproof Cap > Sensor > M10.5

Customized – Upon Request




For male


| Size  | Mating Pair                          | Mating Style | Mating Pair (Gender) | P/N          |
|-------|--------------------------------------|--------------|----------------------|--------------|
| M10.5 | Receptacle and Overmolded with Cable | Screw Thread | Male                 | CAP-WBCMSMA2 |

\* Design and specification are subject to change without notice.


Waterproof Cap > Sensor > M12

| <div>Customized – Upon Request</div> <div></div> <div>* For Female</div> <div>7 Choose plastic(1) or metal(2) items</div> |                    |                                      |              |                      |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------|--------------|----------------------|---------------|
| Size                                                                                                                                                                                                       | Size               | Mating Pair                          | Mating Style | Mating Pair (Gender) | P/N           |
| M12                                                                                                                                                                                                        | A/B/D Code I Style | Receptacle                           | Screw Thread | Male                 | CAP-WBDPMSB1  |
|                                                                                                                                                                                                            |                    | Receptacle and Overmolded with Cable | Screw Thread | Male                 | CAP-WBDMSMA 7 |
|                                                                                                                                                                                                            |                    |                                      |              | Female               | CAP-WBDFSMA 7 |
| M12(Plastic)                                                                                                                                                                                               | A/B/D Code I Style | Receptacle and Overmolded with Cable | Screw Thread | Male                 | CAP-WBDMSMA 7 |
|                                                                                                                                                                                                            |                    |                                      |              | Female               | CAP-WBDFSMA 7 |

Waterproof Cap > Sensor > Heavy Duty Shielded Connectors


| <div>Customized – Upon Request</div> <div></div> |             |              |                      |              |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|----------------------|--------------|
| Size                                                                                                                                | Mating Pair | Mating Style | Mating Pair (Gender) | P/N          |
| M22                                                                                                                                 | Receptacle  | Screw Thread | Male                 | CAP-WHBMSPD1 |

Waterproof Cap > Sensor > M23


| <div>Customized – Upon Request</div> <div></div> |                                      |              |                      |              |
|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------|----------------------|--------------|
| Size                                                                                                                                | Mating Pair                          | Mating Style | Mating Pair (Gender) | P/N          |
| M23                                                                                                                                 | Receptacle and Overmolded with Cable | Screw Thread | Male                 | CAP-WBHMSMA1 |

## Waterproof Cap > USB I IEEE 1394


Customized – Upon Request




\* USB Screw (Mating Pair: Male)



\* USB Lock



\* USB Screw (Mating Pair: Female)




\* IEEE 1394

6 More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

| Type                                               | Mating Pair                          | Mating Style         | Mating Pair (Gender) | P/N            |
|----------------------------------------------------|--------------------------------------|----------------------|----------------------|----------------|
| USB 2.0 Type A<br>USB 2.0 Type B<br>USB 3.0 Type A | Receptacle                           | Screw Thread         | Male                 | CAP-WACMSP 6 1 |
|                                                    |                                      | 2 point lock bayonet | Male                 | CAP-WADMLP 6 1 |
|                                                    | Receptacle and Overmolded with Cable | Screw Thread         | Male                 | CAP-WACMSMA1   |
|                                                    |                                      | 2 point lock bayonet | Male                 | CAP-WADMLMA1   |
|                                                    | Overmolded with Cable                | Screw Thread         | Female               | CAP-WUSFSCC1   |
| IEEE 1394                                          | Receptacle                           | Screw Thread         | Male                 | CAP-WACMSP 6 1 |
|                                                    | Receptacle and Overmolded with Cable | Screw Thread         | Male                 | CAP-WACMSMA1   |

## Waterproof Cap > D-SUB I DVI

Customized – Upon Request




7 Choose rubber lead: Vertical type (1) / Horizontal type (2)

| Type               |                        | Mating Pairs | Mating Style | Mating Pair (Gender) | P/N          |
|--------------------|------------------------|--------------|--------------|----------------------|--------------|
| Standard D-SUB     | High Density D-SUB     |              |              |                      |              |
| Standard (9 pins)  | High Density (15 Pins) | Receptacle   | Screw Thread | Male & Female        | CAP-WD1CSPA1 |
| Standard (15 pins) | High Density (26 Pins) | Receptacle   | Screw Thread | Male & Female        | CAP-WD2CSPA1 |
| Standard (25 pins) | High Density (44 Pins) | Receptacle   | Screw Thread | Male & Female        | CAP-WD3CSPA1 |
| DVI                |                        | Receptacle   | Screw Thread | Male & Female        | CAP-WDVCSPA1 |


\* Design and specification are subject to change without notice.

Waterproof Cap > RJ


Customized – Upon Request




\* RJ C 3 Point Lock



\* RJ C Screw



\* RJ D Screw




\* RJ ODVA 3 Point Lock

6 More to choose: None(A) / With Chain(B)  
/ With Rubber Lead(C) / With Fish Line(D)


7 Choose plastic (1) or metal (2) items

| Size   | Mating Pair | Mating Style         | Mating Pair (Gender) | P/N                           |
|--------|-------------|----------------------|----------------------|-------------------------------|
| C Size | Receptacle  | 3 point lock bayonet | Male                 | CAP-WACMTMA1<br>CAP-WACMTP6 1 |
|        |             | Screw Thread         | Male                 | CAP-WACMSMA7<br>CAP-WACMSP6 7 |
| D Size | Receptacle  | Screw Thread         | Male                 | CAP-WADMSMA1<br>CAP-WADMSP6 1 |
| ODVA   | Receptacle  | 3 point lock bayonet | Male                 | CAP-WEOFTPC1                  |

Waterproof Cap > HDMI




\* D Size (Circular Type)




\* Rectangle Type

| Size                   | Mating Pair | Mating Style | Mating Pair (Gender) | P/N          |
|------------------------|-------------|--------------|----------------------|--------------|
| D Size (Circular Type) | Receptacle  | Screw Thread | Male                 | CAP-WADMSMA1 |
| Rectangle Type         | Receptacle  | Latch Type   | Female               | CAP-WHDFLPA1 |

Waterproof Cap > Fiber Optic

| <div>Customized – Upon Request</div> <div></div> |                                      |                      |                      |              |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------------------|----------------------|--------------|
| 7                                                                                                                                 |                                      |                      |                      |              |
| Size                                                                                                                              | Mating Pair                          | Mating Style         | Mating Pair (Gender) | P/N          |
| Fiber Optic                                                                                                                       | Receptacle and Overmolded with Cable | 3 point lock bayonet | Female               | CAP-WFBFTMA1 |


Dummy > Circular > Middle Size: 13/16"-28 UNS

| <div>Customized – Upon Request</div> <div></div> |                     |              |              |
|------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------|--------------|
| Size                                                                                                                               | Mating Pair         | Mating Style | P/N          |
| 13/16"-28 UNS                                                                                                                      | Receptacle (Female) | Screw Thread | CAP-CACFSBA1 |

\* Design and specification are subject to change without notice.


# Accessories - Multi-port

Multi-port > Circular > Mini Size: 7/16"-28 UNS
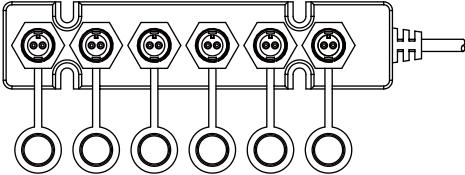
| <div><div></div> Customized – Upon Request</div> <div></div> <div>* Choose the cable length:01-99 m / Cable 22+24+B PVC</div> |          |                      |                                                 |                                                   |                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------|-------------------------------------------------|---------------------------------------------------|-------------------------|
| Current Rating                                                                                                                                                                                                 | Contacts | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Male Connector / Female Contacts) | More options            |
|                                                                                                                                                                                                                |          |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Male Connector / Female Contacts) |                         |
|                                                                                                                                                                                                                |          |                      | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Male Connector / Female Contacts) |                         |
|                                                                                                                                                                                                                |          |                      | Connector 4<br>(Male Connector / Male Contacts) | Connector 4<br>(Male Connector / Female Contacts) |                         |
|                                                                                                                                                                                                                |          |                      | Connector 5<br>(Male Connector / Male Contacts) | Connector 5<br>(Male Connector / Female Contacts) |                         |
|                                                                                                                                                                                                                |          |                      | Connector 6<br>(Male Connector / Male Contacts) | Connector 6<br>(Male Connector / Female Contacts) |                         |
| 5A                                                                                                                                                                                                             | 02,03    | Screw Thread         | A-222222-MMMMMM-SA*                             | A-222222-HHHHHH-SA*                               | A-22222-78910111213-SA* |
|                                                                                                                                                                                                                |          | 2 point lock bayonet | A-222222-MMMMMM-LA*<br>A-22222-MMMMMM-LA01      | A-222222-HHHHHH-LA*                               | A-22222-78910111213-LA* |
| 2A                                                                                                                                                                                                             | 04,05,06 | Screw Thread         | A-222222-MMMMMM-SA*                             | A-222222-HHHHHH-SA*                               | A-22222-78910111213-SA* |
|                                                                                                                                                                                                                |          | 2 point lock bayonet | A-222222-MMMMMM-LA*                             | A-222222-HHHHHH-LA*                               | A-22222-78910111213-LA* |

Multi-port > Circular > Standard Size: 5/8"-27 UNS

Customized – Upon Request



- 6 For connector 1
- 7 For connector 2
- 8 For connector 3
- 9 For connector 4

Choose Connector / Contacts Gender:  
M: Male + Male  
F: Female + Female

\* Choose the cable length:01-99 m /  
Cable 22+24+B PVC


| Current Rating | Contacts<br>2        | Mating Style         | Connector 1<br>(Male Connector / Male Contacts) | Connector 1<br>(Male Connector / Female Contacts) | More options            |
|----------------|----------------------|----------------------|-------------------------------------------------|---------------------------------------------------|-------------------------|
|                |                      |                      | Connector 2<br>(Male Connector / Male Contacts) | Connector 2<br>(Male Connector / Female Contacts) |                         |
|                |                      |                      | Connector 3<br>(Male Connector / Male Contacts) | Connector 3<br>(Male Connector / Female Contacts) |                         |
|                |                      |                      | Connector 4<br>(Male Connector / Male Contacts) | Connector 4<br>(Male Connector / Female Contacts) |                         |
| 10A            | 02,03,04             | Screw Thread         | B-2 2 2 2 -MMMMMM-SA*                           | B-2 2 2 2 -HHHHHH-SA*                             | B-2 2 2 2 -6 7 8 9 -SA* |
|                |                      | 2 point lock bayonet | B-2 2 2 2 -MMMMMM-LA*                           | B-2 2 2 2 -HHHHHH-LA*                             | B-2 2 2 2 -6 7 8 9 -LA* |
| 5A             | 02,03,04,05,06,07,08 | Screw Thread         | B-2 2 2 2 -MMMMMM-SA*                           | B-2 2 2 2 -HHHHHH-SA*<br>B-04040404-HHHH-SA*      | B-2 2 2 2 -6 7 8 9 -SA* |
|                |                      | 2 point lock bayonet | B-2 2 2 2 -MMMMMM-LA*                           | B-2 2 2 2 -HHHHHH-LA*                             | B-2 2 2 2 -6 7 8 9 -LA* |
| 2A             | 10,12                | Screw Thread         | B-2 2 2 2 -MMMMMM-SA*                           | B-2 2 2 2 -HHHHHH-SA*                             | B-2 2 2 2 -6 7 8 9 -SA* |
|                |                      | 2 point lock bayonet | B-2 2 2 2 -MMMMMM-LA*                           | B-2 2 2 2 -HHHHHH-LA*                             | B-2 2 2 2 -6 7 8 9 -LA* |

\* Design and specification are subject to change without notice.


# Accessories - Box

Box > USB > 2.0 Type A, 2.0 Type B

Customized – Upon Request

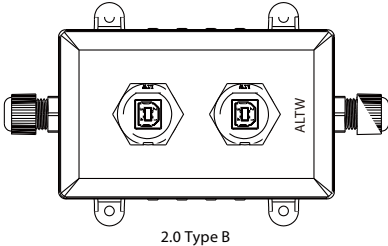

2.0 Type B

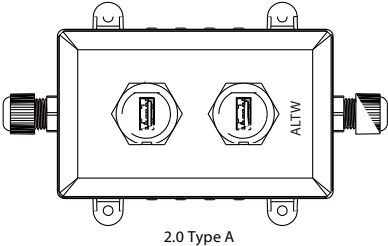


2.0 Type A


| Type       | Ports | P/N       |
|------------|-------|-----------|
| 2.0 Type A | 1     | BOX-USA11 |
|            | 2     | BOX-USA22 |
|            | 4     | BOX-USA44 |
| 2.0 Type B | 1     | BOX-USB11 |
|            | 2     | BOX-USB22 |
|            | 4     | BOX-USB44 |

## Accessories - Tool


Wrench > Circular > Standard Size:  
5/8"-27 UNS

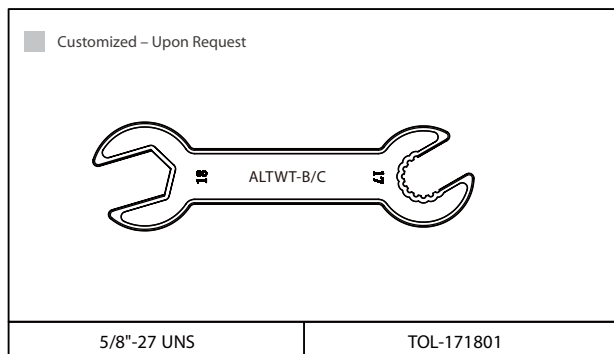


Wrench > Circular > Middle Size:  
13/16"-28 UNS

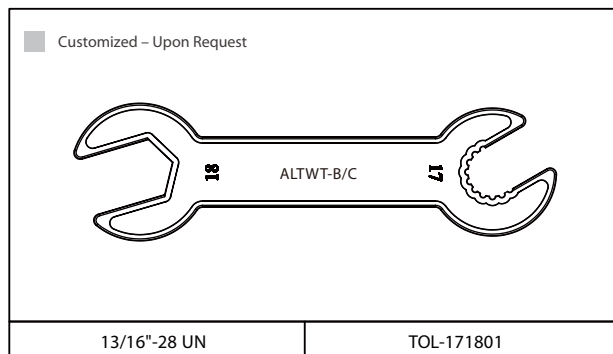

Wrench > Circular > Large Size:  
1"-20 UNEF


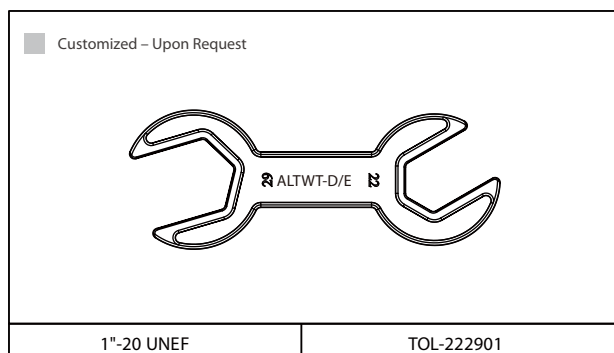


Unlock Tool > Cable Joiner >  
8~10mm/10~12mm/12~16mm

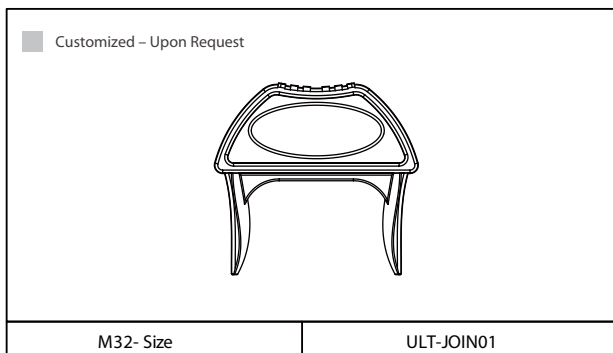

# Accessories - Joint

Joint > D-SUB > Standard & High Density
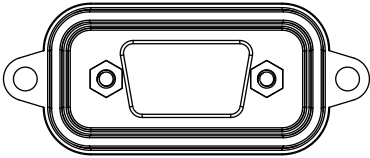
| <div><div></div> Customized – Upon Request</div> <div></div> |                        |              |                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|-------------------|
| Type                                                                                                                                                                                                                            |                        | Mating Style | P/N               |
| Standard D-SUB                                                                                                                                                                                                                  | High Density D-SUB     |              |                   |
| Standard (9 pins)                                                                                                                                                                                                               | High Density (15 Pins) | Screw Thread | DJ1-00JNNA-SL7001 |
| Standard (15 pins)                                                                                                                                                                                                              | High Density (26 Pins) | Screw Thread | DJ2-00JNNA-SL7001 |
| Standard (25 pins)                                                                                                                                                                                                              | High Density (44 Pins) | Screw Thread | DJ3-00JNNA-SL7001 |

# Accessories - Patch Cable (Double-ended)

## Patch Cable (Double-ended) > RJ

Customized – Upon Request

End 2

Pin Header

End 1

Plug

Gold Plated 6u"

Pitch 2.54mm

Select cable length 10cm/20cm/30cm

| End 1            |        | End 2            |            | P/ N            |
|------------------|--------|------------------|------------|-----------------|
| Type             | Gender | Type             | Gender     |                 |
| RJ 45 Unshielded | Plug   | RJ 45 Unshielded | Pin Header | UPG06-CHOP1-C10 |
|                  |        |                  | Plug       | UPG06-UPG06-C10 |

\* Design and specification are subject to change without notice.