

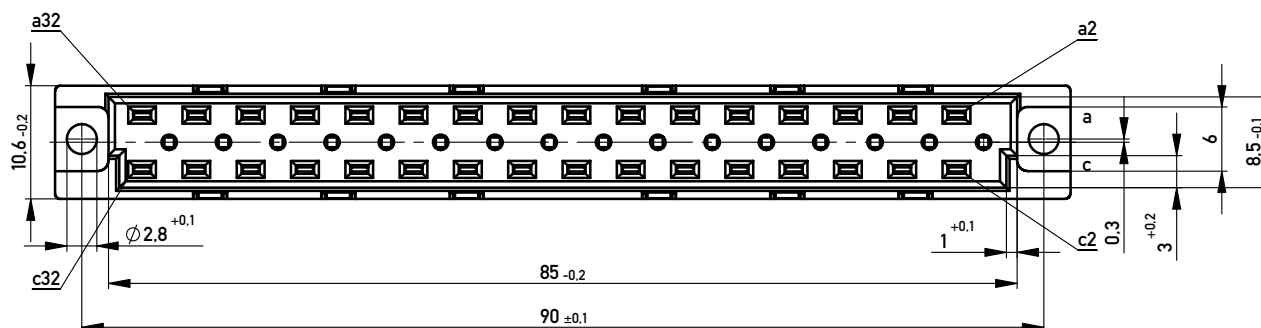



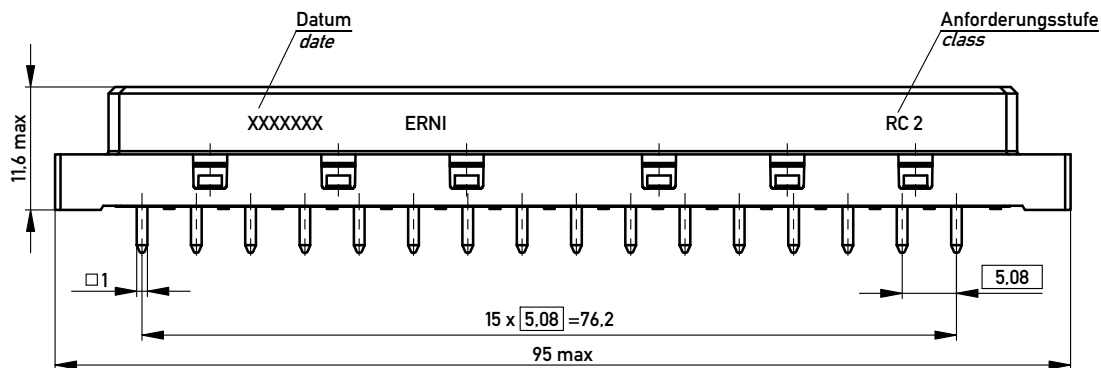


Bestückungsplan / contact layout

■ bestückt / assembled

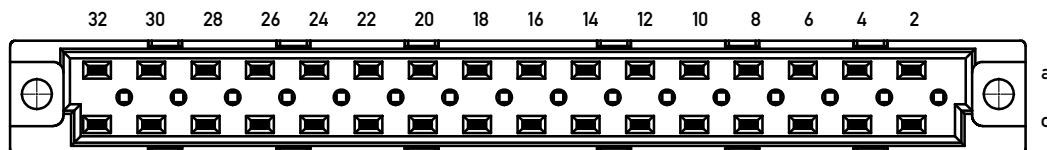

Leiterplatten-Lochbild Vorschlag / PCB drillhole pattern proposal

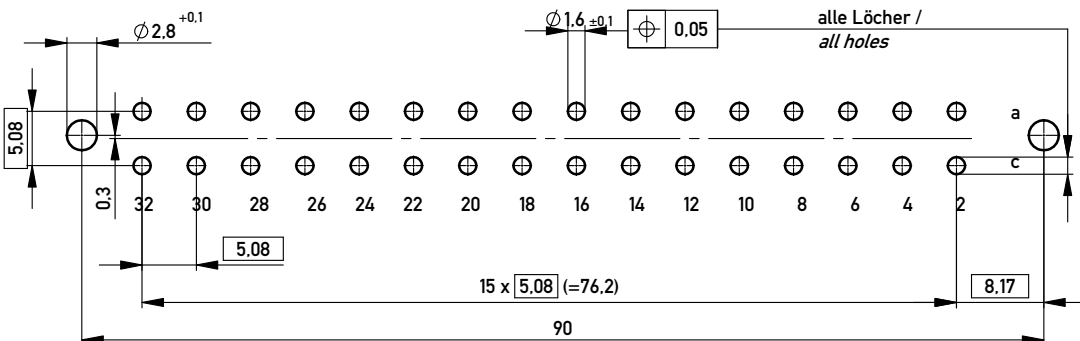

Lötanschluß 1,0 x 1,0 mm / solder terminal 1,0 x 1,0 mm

Isolierwerkstoff / housing material: PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Information:				Tolerances		 All Dimensions in mm		Scale		2:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation Federleiste D 32 Löt <i>Fem. Connector D 32 Solder</i>			
				e		26.04.2013				www.ERNI.com	
Index		Date						Class		STVD	
										A3	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9001:2015 to be observed.

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354338](#)