

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	A1	REVISED PER ECO-11-005150	21MAR11	RK	HMR	

TECHNICAL SPECIFICATION

DISSIPATION AT 25°C 75 WATTS MOUNTED
OHMIC RANGE ON STD HEATSINK
R10 TO 50K
STABILITY $\Delta R \leq 2\%$
per 1000hrs
ISOLATION VOLTAGE 3500v DC/AC pk
MAX WORKING VOLTAGE 1400V DC/AC rms
TEMP COEFFICIENT >100 50ppm
 >1000 25ppm
CLIMATIC CATEGORY 55/200/56

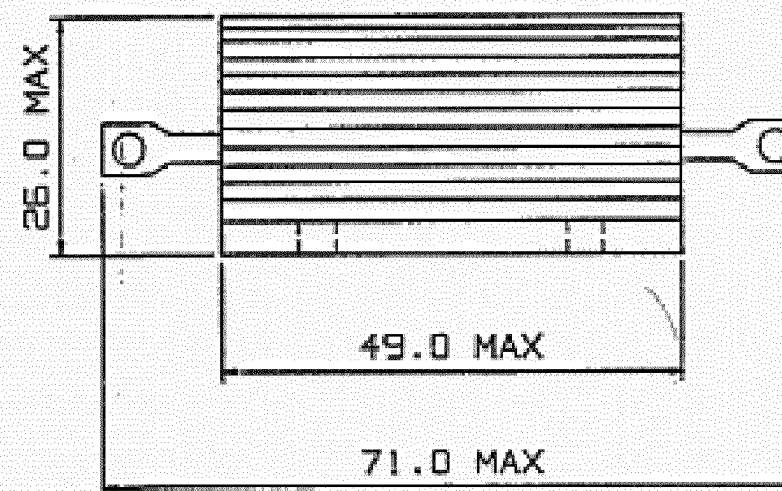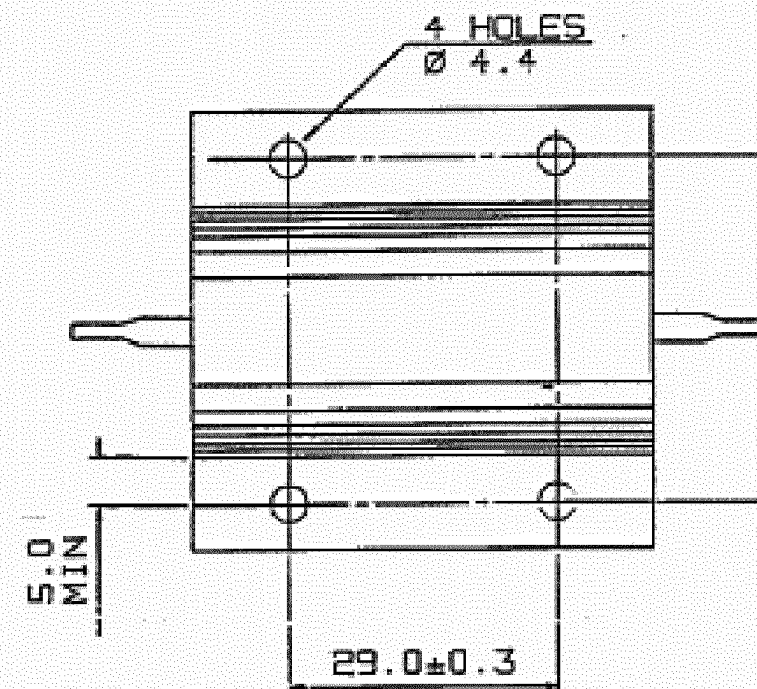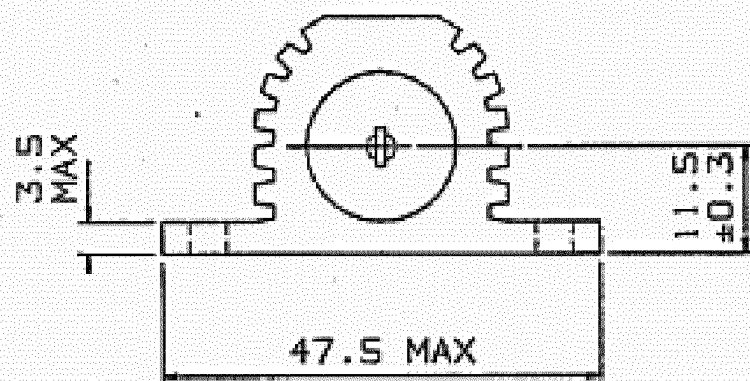

NOTE:

1) FOR A SPECIFIC PN FOR A RESISTANCE VALUE AND TOLERANCE, PLEASE REFER TO DMF.

RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
-	-

DWN	03JUN08
CHK	PRAKASH KANNIAH
APVD	03JUN08
R BLANCH	
J CATCHPOLE	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	-
CUSTOMER DRAWING	

STE TE Connectivity

NAME		THS75 METAL CLAD RESISTOR		
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3	00779	C-1879363	-	
SCALE		SHEET	1 OF 1	REV A1
NTS				