


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX BUNDLE DIA.	PACKAGE QTY	LENGTH L ±.3 [7]
MLT2LH-LP	2" [51]	50	7.9" [201]
MLT4LH-LP	4" [102]	50	14.3" [362]
MLT6LH-LP	6" [152]	50	20.5" [521]
MLT8LH-LP	8" [203]	50	26.8" [679]

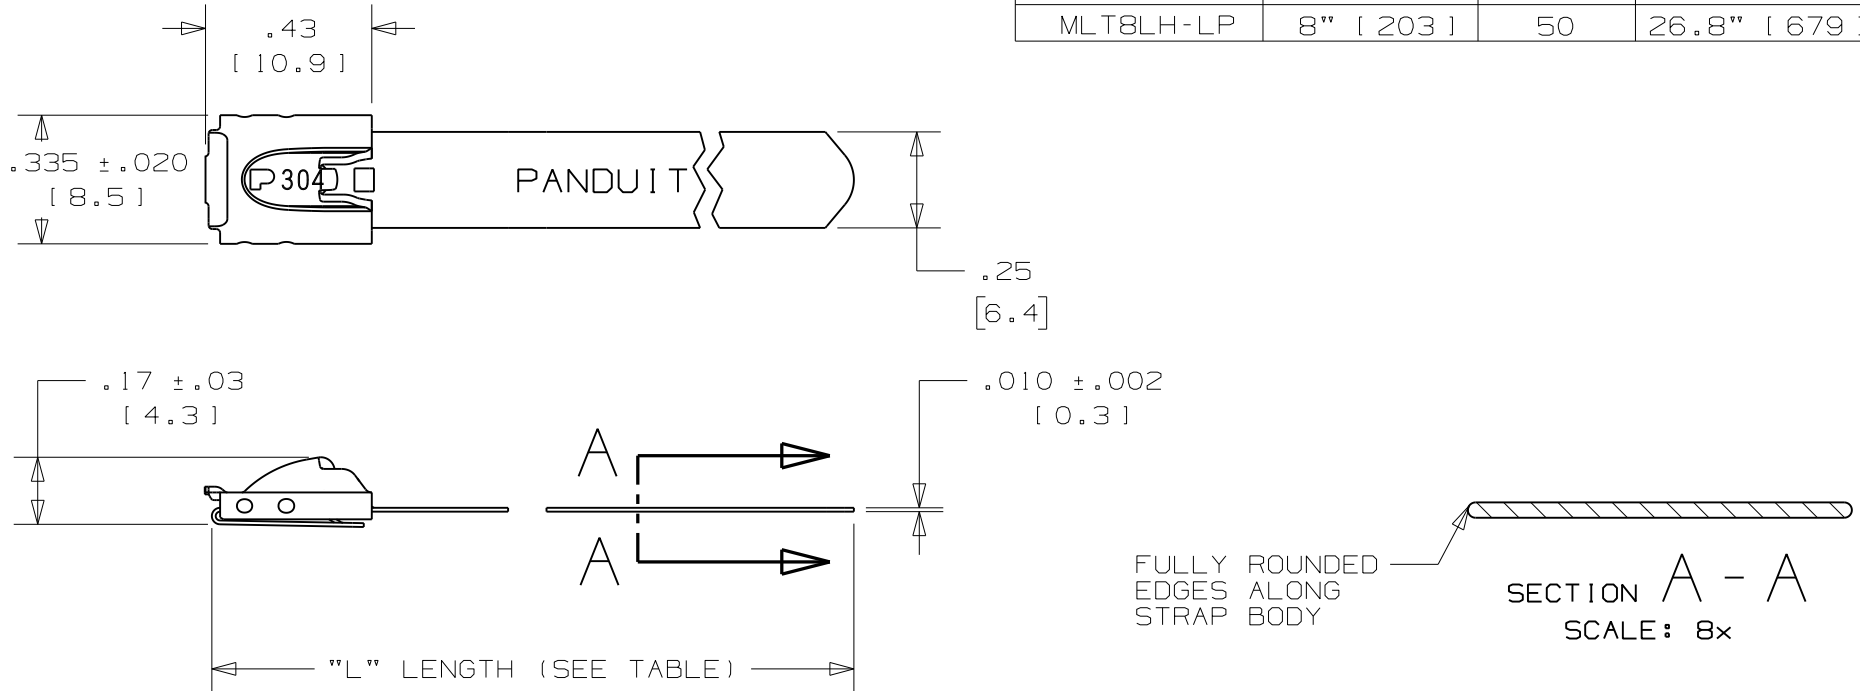

NOTES:

- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
- MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1 1/2" MANDREL
- BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
03A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY				JAMB	DPN	2x	N41126BS_DC
02	8/04	JAMB	DPN	Ⓟ REMOVED "AISI NO.1 FULL RADIUSED" & REPLACED WITH "FULLY ROUNDED"	11907	CCH	JJB				
01	10/03	BRH	DPN	Ⓐ ADDED ST3MT TO APPLICATION TOOLS NOTE	11162	CCH	JJB				
00	6/03	JAMB	DPN	RELEASED	10544	CCH	JJB				

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

METAL LOCKING TIE
LIGHT/HEAVY SERIES - 304 STAINLESS STEEL