

FJ-20-D-06.50-4

FJ-05-D-04.80-4

(1.00 mm) .0394"

FJ SERIES

# FLAT FLEXIBLE CABLE (FFC) JUMPER

## SPECIFICATIONS

For complete specifications  
see [www.samtec.com/FJ](http://www.samtec.com/FJ)

### Conductor:

Tin Plated Copper

### Conductor Resistance:

300  $\Omega$ /km max

### Insulation Resistance:

10 M $\Omega$ /km min

(conductor-to-conductor)

### Dielectric Test:

400 VAC during 1 minute

(conductor-to-conductor)

### Temperature Rating:

-30 °C to +80 °C

### Voltage Rating:

300 VAC

### RoHS Compliant:

Yes


Mates with:

FC1, ZF1

Double or  
reversed ended

Variety of  
pin counts

4.00 mm  
.157"

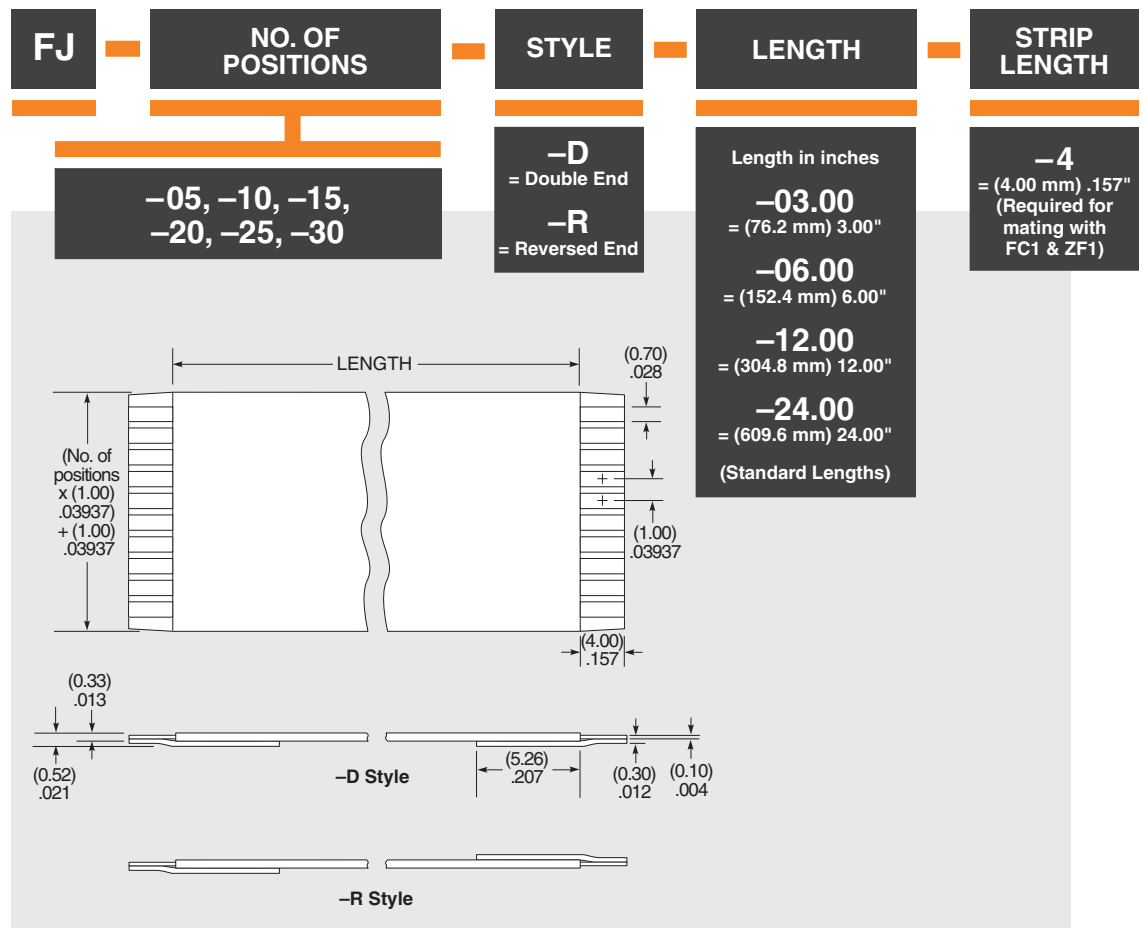

## ALSO AVAILABLE (MOQ Required)

- Other Lengths

### Notes:

Stiffener color will be blue or black at Samtec's discretion.

Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.