
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
-	DCN 46496	06/17	GPF		
Α	DCN 46820	09/17	STW		

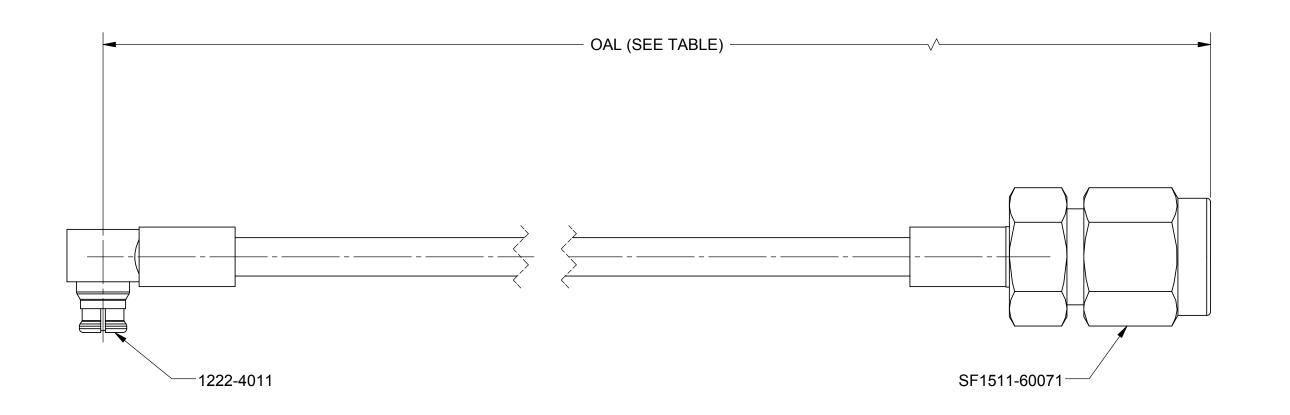

MATERIAL:

MATERIAL:

2.92mm STRAIGHT PLUG (SF1511-60071) SMP R/A JACK (1222-4011) **CONNECTORS:**

T-FLEX 405 (200-70-139) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 26.5 GHz.

				SB/PN	L (OAL)
				7012-1287	6.000"
				7012-1288	12.000"
				7012-1289	24.000"
L:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE	D S	Amphenol

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN 005 T.I.R.
7) REMOVE ALL BURRS FINISH: SEE NOTES DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005 SURFACE AREA: N/A INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DRAWN: VB 06/02/17 THIRD ANGLE PROJECTION CHECKED: GPF 06/02/17 APPROVED: GPF 06/02/17



SMP R/A FEM TO 2.92mm MALE FOR T-FLEX 405

7012-1287-1289 B 95077 SCALE: 4:1 SHEET 1 OF 1