



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

FAST RECOVERY RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 1.0 Ampere

FM101SPT

THRU

FM107SPT

FEATURES

- * Low leakage current
- * Ideal for surface mounted applications
- * Metallurgically bonded construction
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Glass passivated junction
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA


Case: JEDEC SOD-123S molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end



SOD-123S



Dimensions in millimeters

SOD-123S

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	FM101SPT	FM102SPT	FM103SPT	FM104SPT	FM105SPT	FM106SPT	FM107SPT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current at $T_A = 75^\circ\text{C}$	I_o	1.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							Amps
Typical Junction Capacitance (Note 1)	C_j	15							pF
Operating and Storage Temperature Range	$T_{J,STG}$	-65 to +150							$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	FM101SPT	FM102SPT	FM103SPT	FM104SPT	FM105SPT	FM106SPT	FM107SPT	UNITS
Maximum Instantaneous Forward Voltage at 1.0 A DC	V_F	1.3							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at $T_A = 25^\circ\text{C}$	I_R	5.0							uAmps
Maximum Full Load Reverse Current Average, Full Cycle 0.375" (9.5mm) lead length at $T_L = 55^\circ\text{C}$		100							uAmps
Maximum Reverse Recovery Time (Note 2)	t_{rr}	150			250		500		nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : $I_F = 0.5\text{ A}$, $I_R = -1.0\text{ A}$, $I_{RR} = -0.25\text{ A}$

2005-3

RATING CHARACTERISTIC CURVES (FM101SPT THRU FM107SPT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

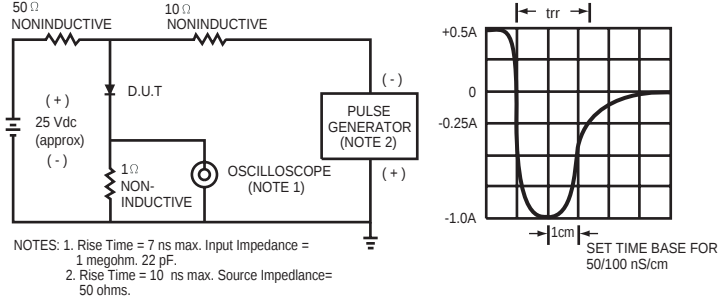


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

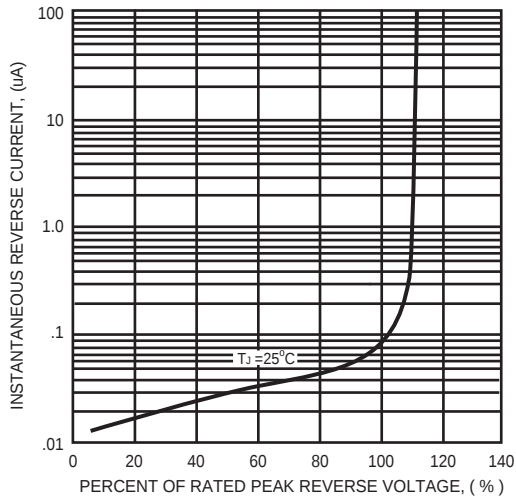


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

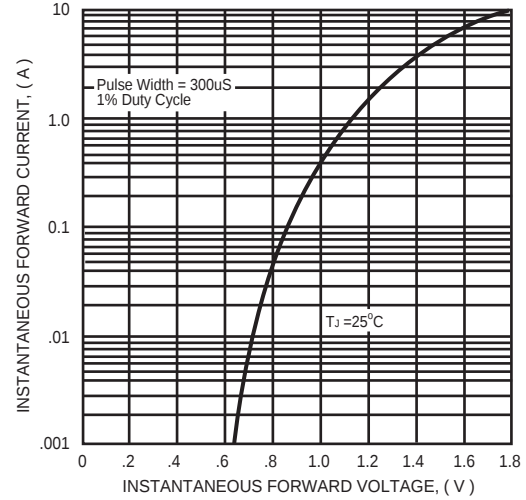


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

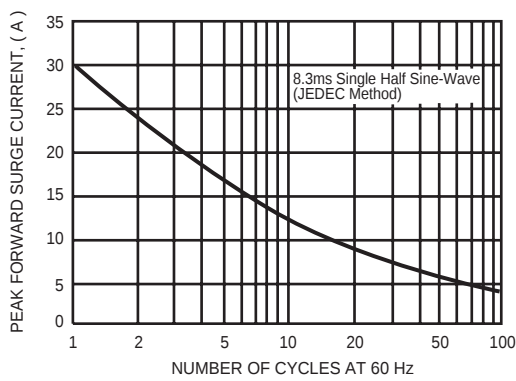


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

