



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	RELEASED PER ECO-14-017426		10DEC2014	-	-	
	A1	REVISED PER ECO-19-004404		23APR2019	DF	JM	

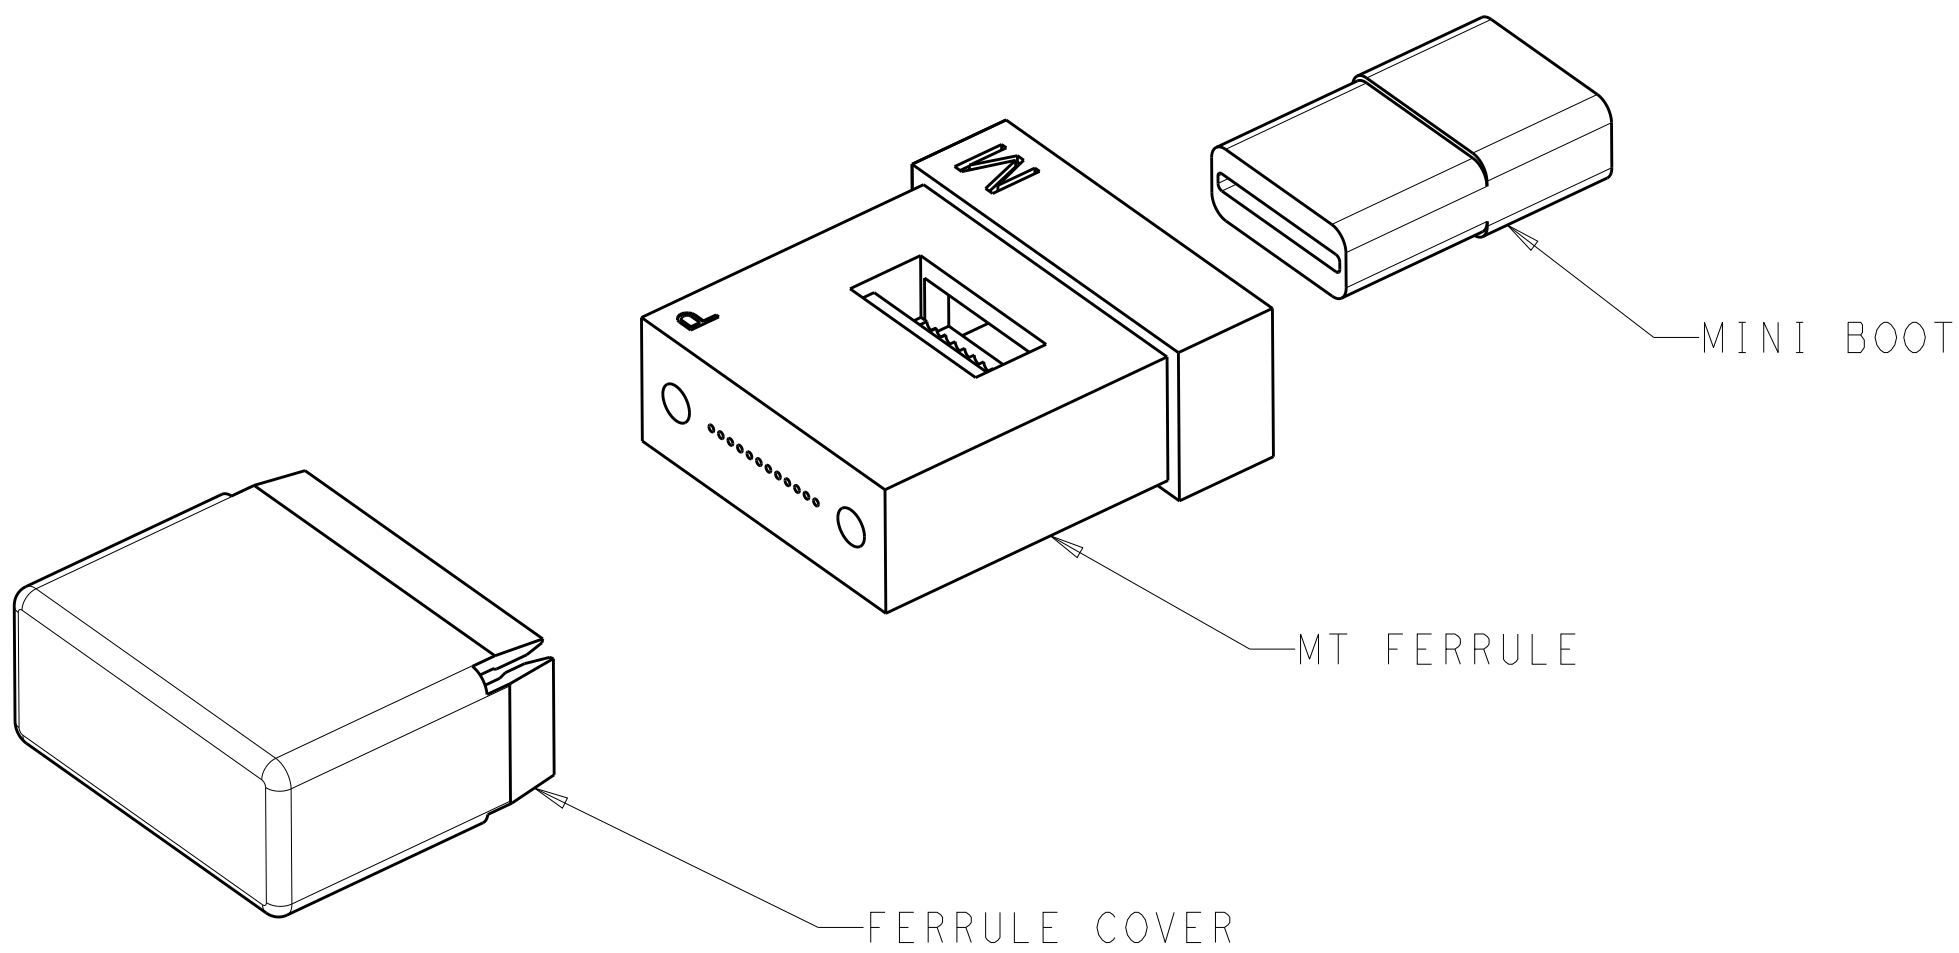

2102866-1 ^{△3}
RECEPTACLE (BACKPLANE) KIT

- ^{△1} MATERIAL:
MT FERRULE: THERMOPLASTIC, PER ASTM D4067
MINI BOOT: VULCANIZED THERMLASTIC POLYOLEFIN
FERRULE COVER: ABS THERMOPLASTIC PER ASTM D4673
SPRING: 300 SERIES STAINLESS STEEL WIRE, PER ASTM A313
PIN HOLDER: 300 SERIES STAINLESS STEEL, PER ASTM A666
PINS: 400 SERIES STAINLESS STEEL, PER ASTM A276
- ^{△2} FINISH:
SPRING: PASSIVATED
- ^{△3} UNASSEMBLIED RECEPTACLE FIBER OPTIC KIT
CONTAINING THE MT FERRULE, MINI-BOOT AND FERRULE COVER
USE WITH RECEPTACLE (BACKPLANE) CONNECTOR KITS:
VITA 66.1: 2000973-1
VITA 66.4: 2226880-1
- ^{△4} UNASSEMBLIED PLUG FIBER OPTIC KIT,
CONTAINING MT FERRULE, MINI-BOOT, PIN HOLDER, SPRING AND FERRULE COVER
USE WITH PLUG (MODULE) CONNECTOR KITS:
VITA 66.1: 2000974-1
VITA 66.4: 2226881-1

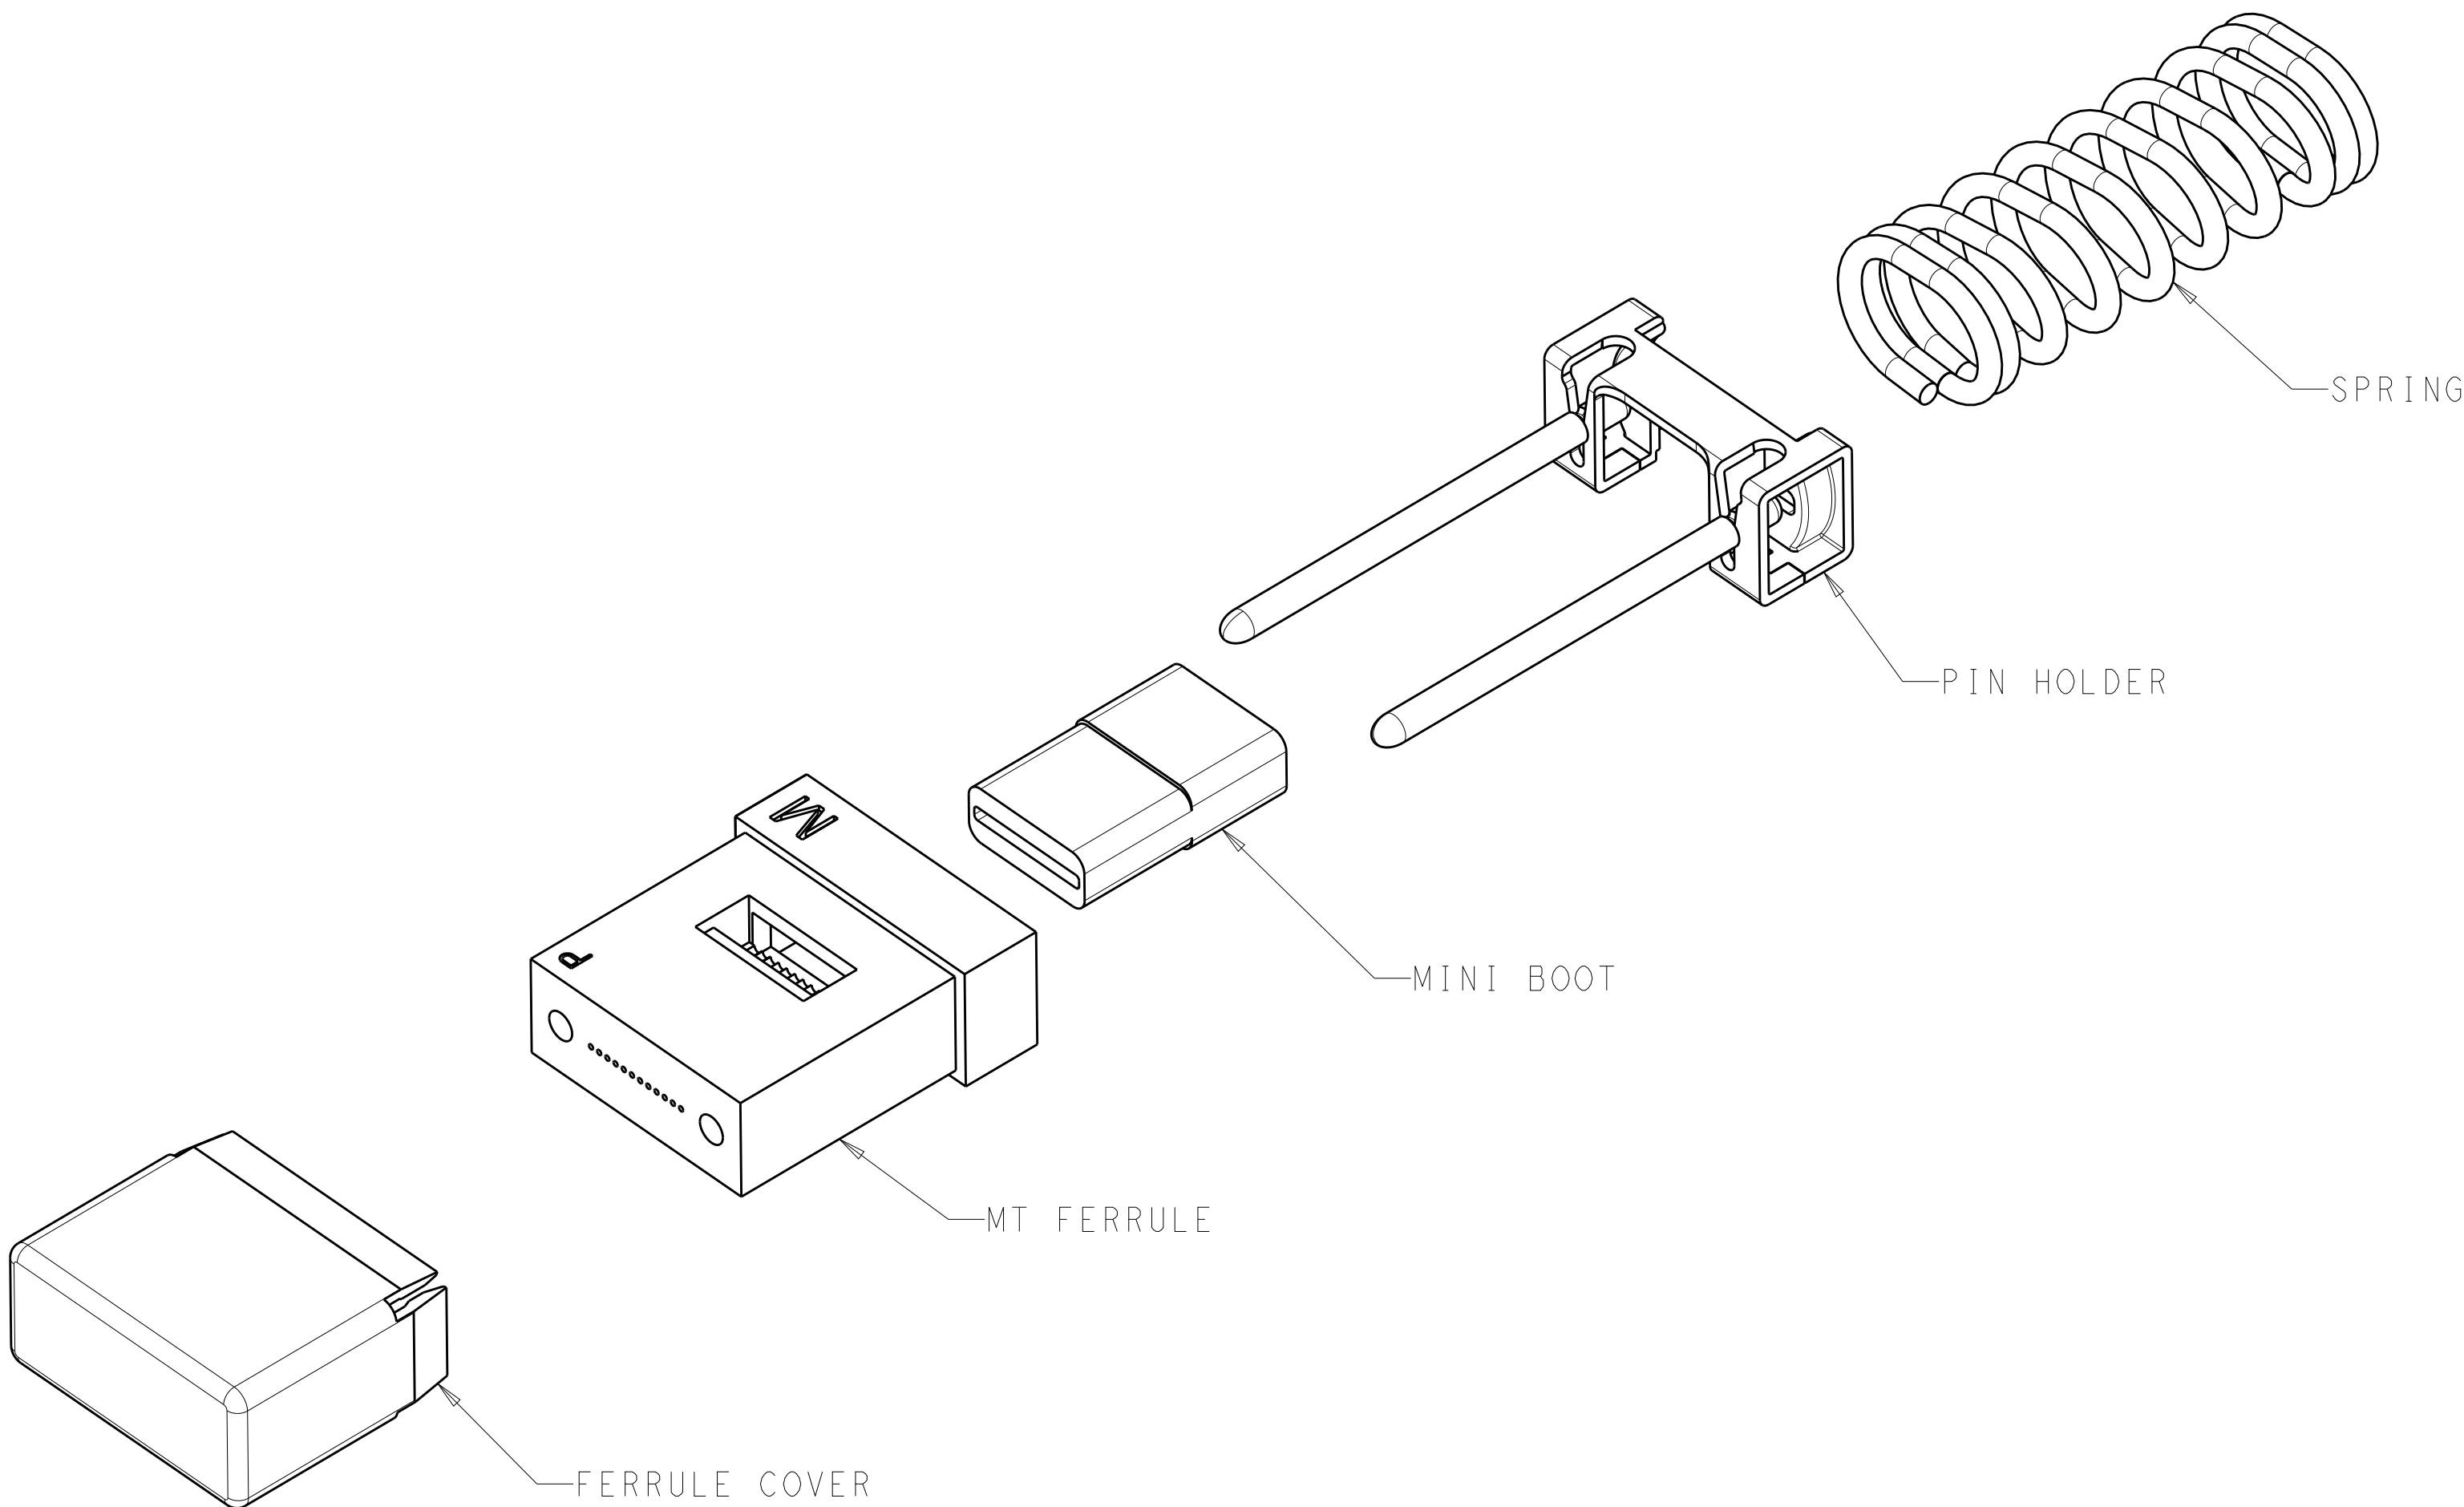

2102866-2 ^{△4}
PLUG (MODULE) KIT

MULTI-MODE, 12-FIBER, STANDARD GRADE		UNASSEMBLED PLUG KIT ^{△4}		2102866-2
MULTI-MODE, 12-FIBER, STANDARD-GRADE		UNASSEMBLED RECEPTACLE KIT ^{△3}		2102866-1
MT FERRULE TYPE		COMMENTS		PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. FABIAN	09FEB2012	TE Connectivity MT FERRULE KIT, 12 FIBER, MM 50/125, STANDARD GRADE FIBER OPTIC
DIMENSIONS:		CHK -	-	
mm		APVD -	-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	NAME	
0 PLC ±"		108-2247		SIZE A1
1 PLC ±"		APPLICATION SPEC		
2 PLC ±0.13		114-32050		
3 PLC ±0.013		WEIGHT		
4 PLC ±"		Customer Drawing	SCALE 8:1	SHEET 1 OF 1
ANGLES				REV A1
FINISH				