
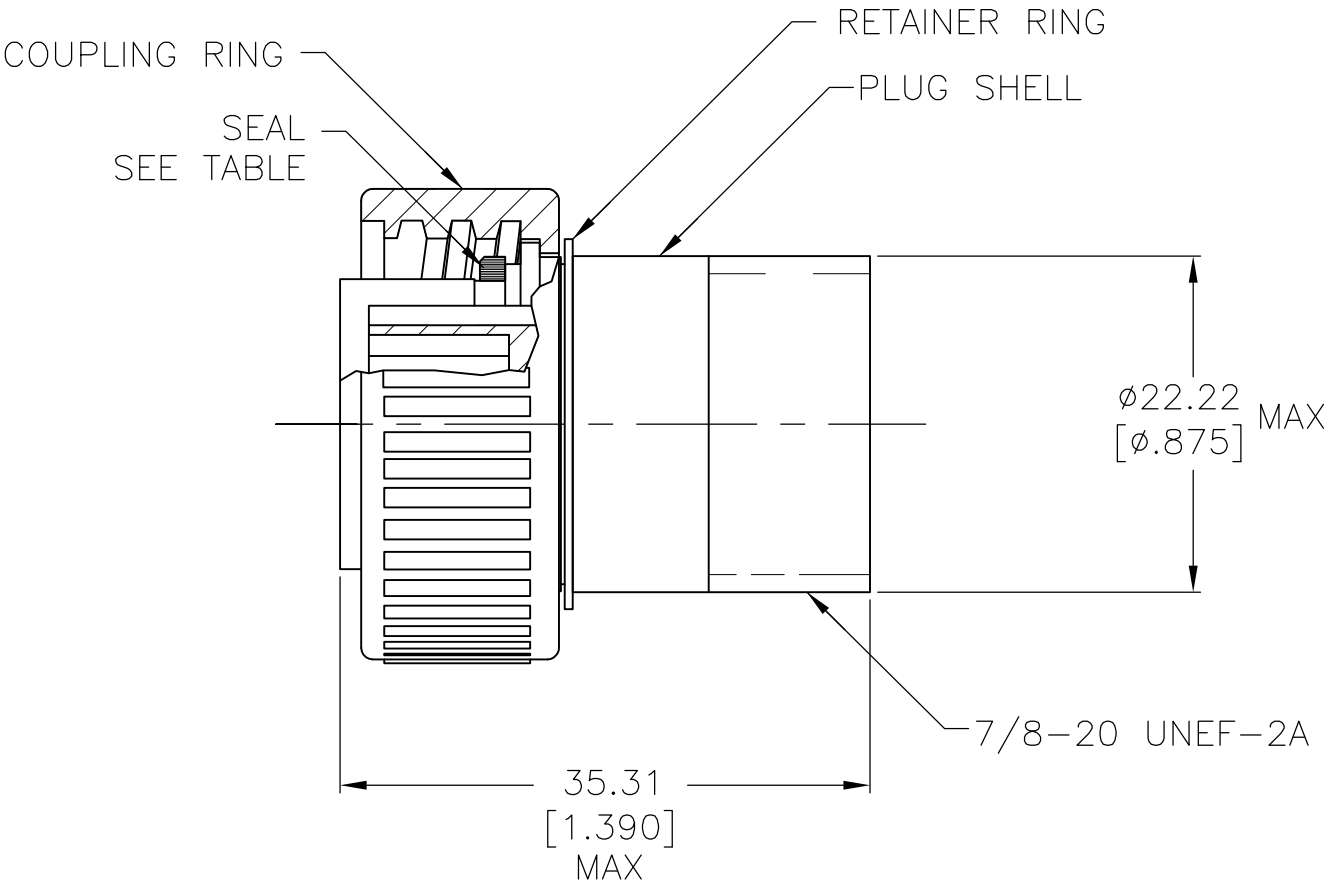
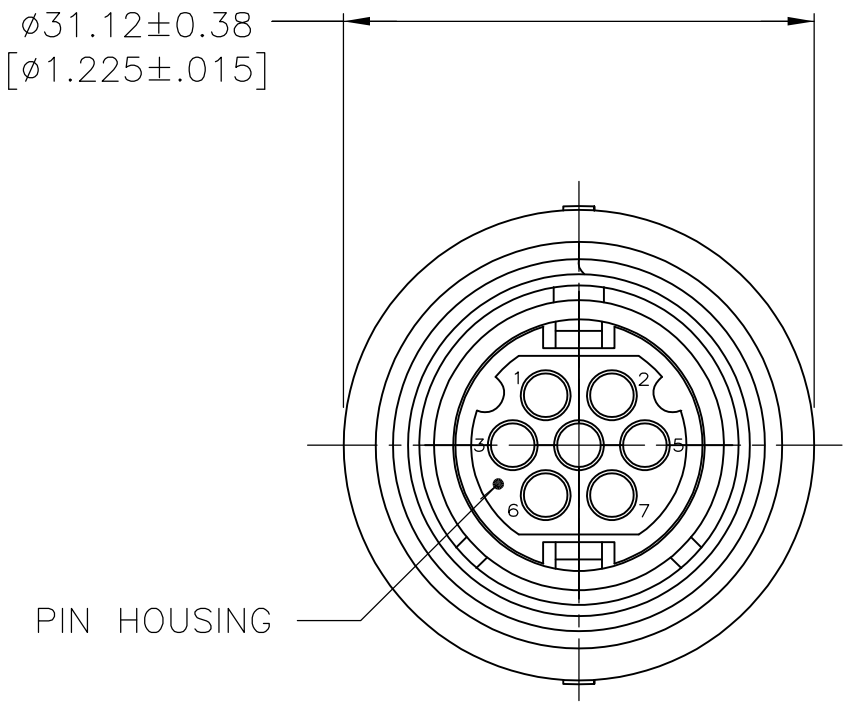


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J1	REVISED PER ECO-16-004800	10SEP2016	NK	MZ



- 1 THIS CONNECTOR ACCEPTS SEVEN (7) SIZE 16 MULTIMATE PIN CONTACTS, MAXIMUM WIRE INSULATION DIA = 2.67 [.105].
- 2 THIS CONNECTOR MATES WITH AMP P/N 208717-1.
- 3 AMP P/N AND DATE CODE TO BE LOCATED ON COUPLING RING.
- 4 NICKEL PER QQ-N-290 OVER COPPER PER MIL-C-14550.
- 5 ZINC PER QQ-Z-363.

OBSOLETE	YES	208716-2
	NO	208716-1
	SEAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY	05/20/94	 TE Connectivity						
		CHK R.STONE	05/26/94							
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD A.FRANTUM	NAME PLUG ASSEMBLY, REVERSE SEX, SERIES 1, 14-7, CMC						
PRODUCT SPEC —										
APPLICATION SPEC —										
			WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
					A3	00779	C-208716	—		
MATERIAL PIN HSG: THERMOPLASTIC, BLACK SEAL: FLUOROCARBON ELASTOMER RTNR RING: STAINLESS STEEL CPLG RING:  PLUG SHELL: 	FINISH CPLG RING:  PLUG SHELL: 		CUSTOMER DRAWING					SCALE 2:1	SHEET 1 OF 1	REV J1