
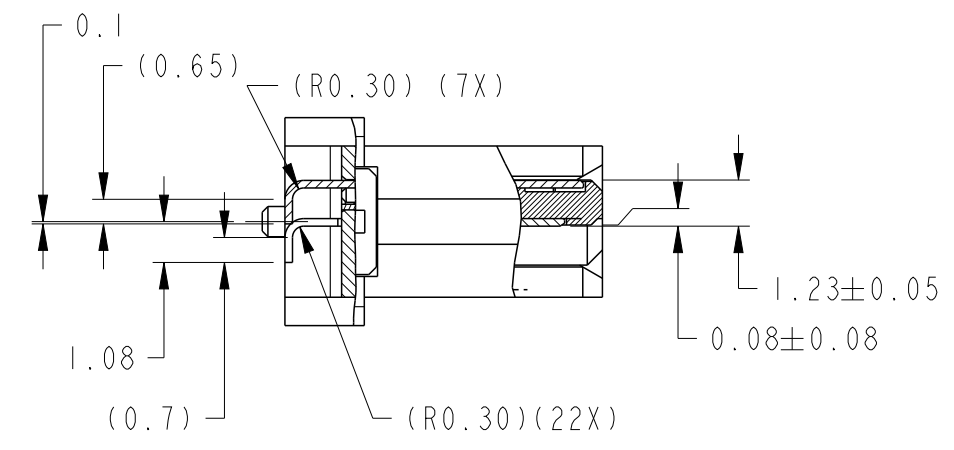
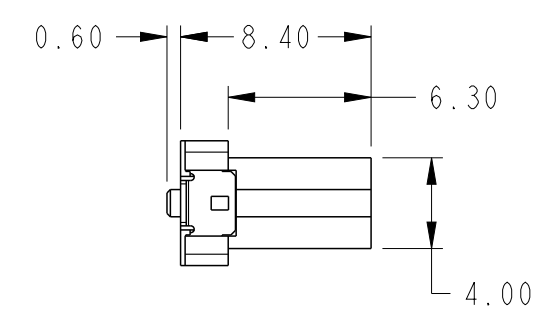
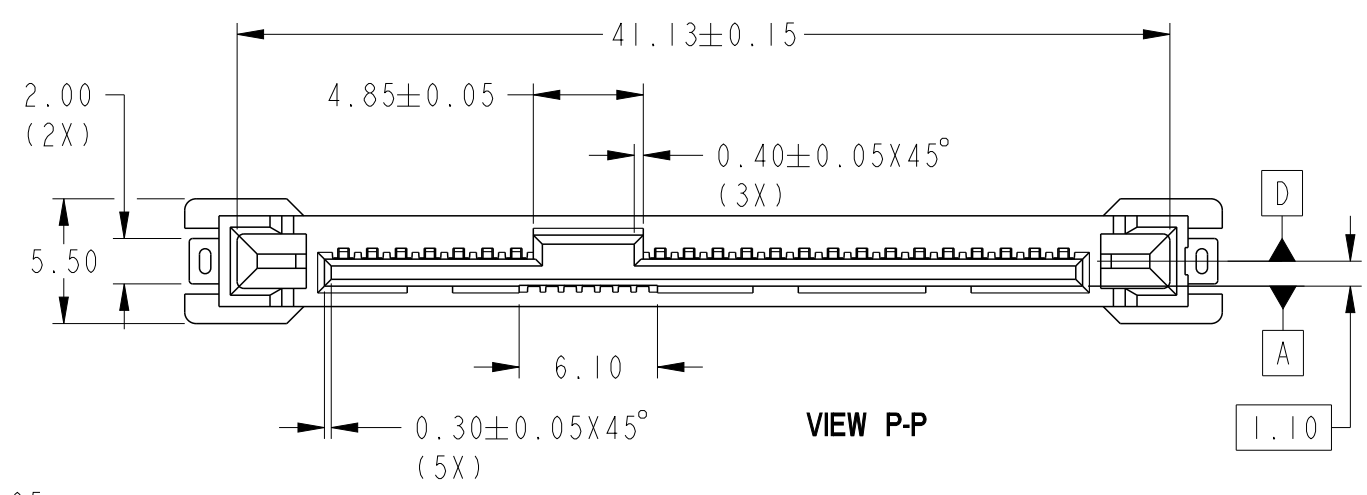
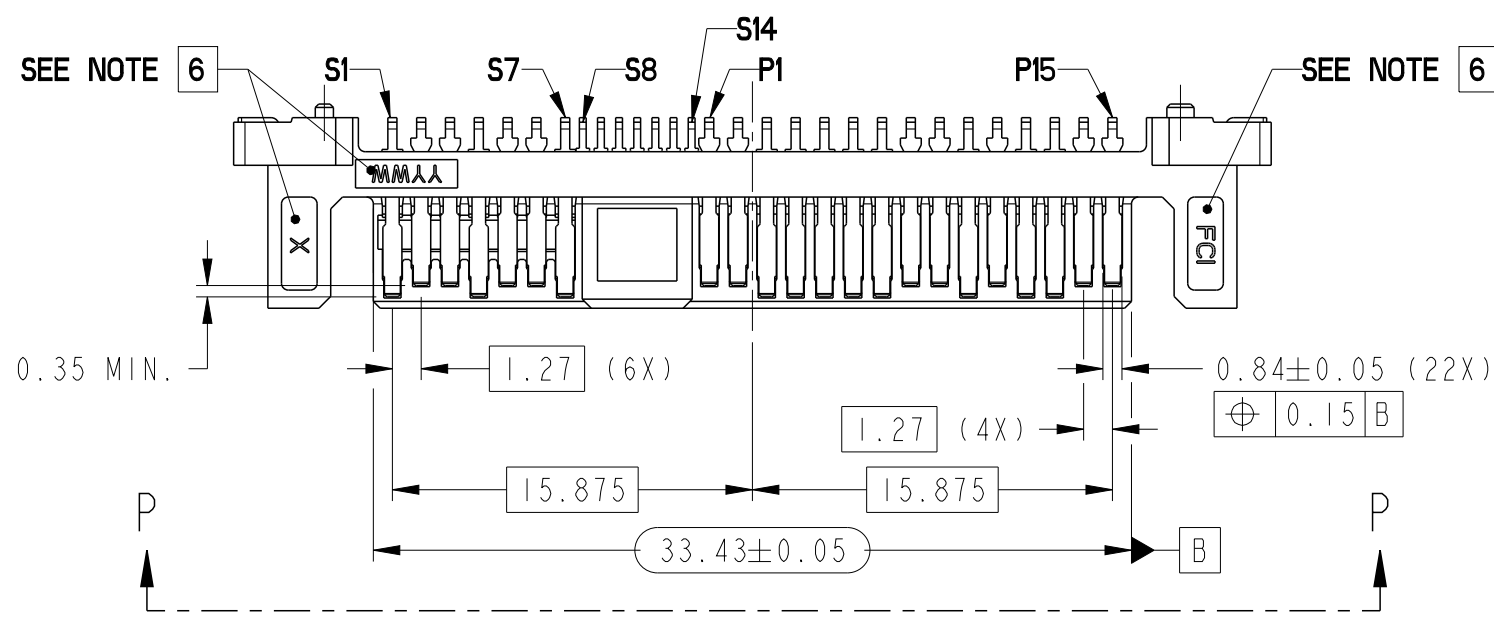
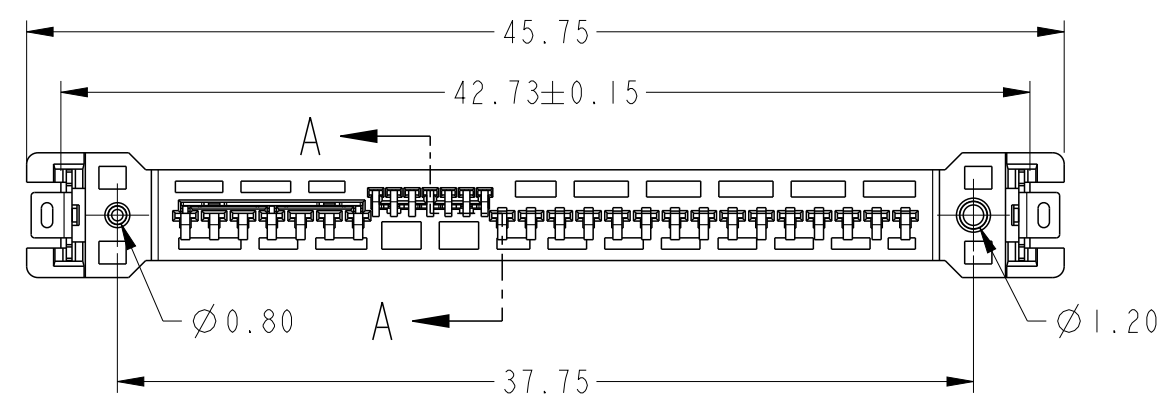
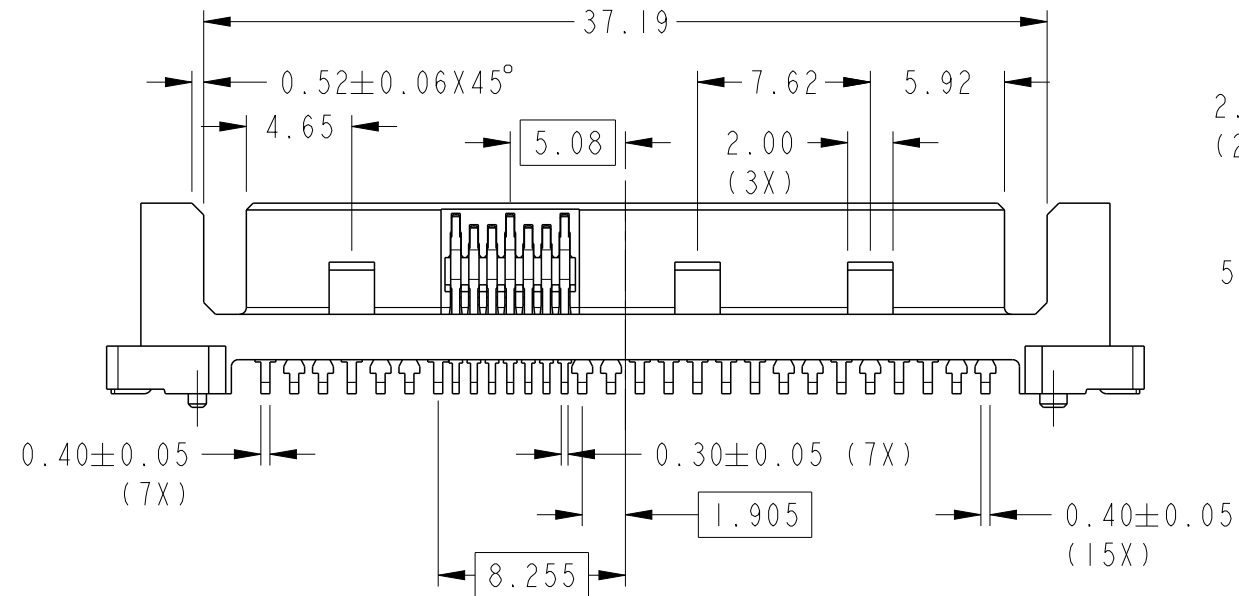



PRODUCT NUMBER
10131436-001LF
10131436-002LF 




SECTION A-A
SCALE 5:1

spec ref				dr	S Paulpandian	2014/11/21	projection		MM		size	A3	scale	3:1
tolerance std				eng	Siew-Leong Lim	2016/06/03					ecn no	ELX-S-24203-1		
ASME Y14.5				chr	-	-								
-				appr	Koon-Poh Tay	2016/06/10					product family		rel level	
surface	linear	0.X	±0.40	Amphenol FCi	title	12G SAS PLUG					dwg no	10131436		rev
		0.XX	±0.25											
		0.XXX	± -											
ASME Y14.5	angular	0°	±5°		cat. no.	Product - Customer Drw					sheet 1 of 3			
TOLERANCES UNLESS OTHERWISE SPECIFIED														


PRODUCT NUMBER
SEE TABLE

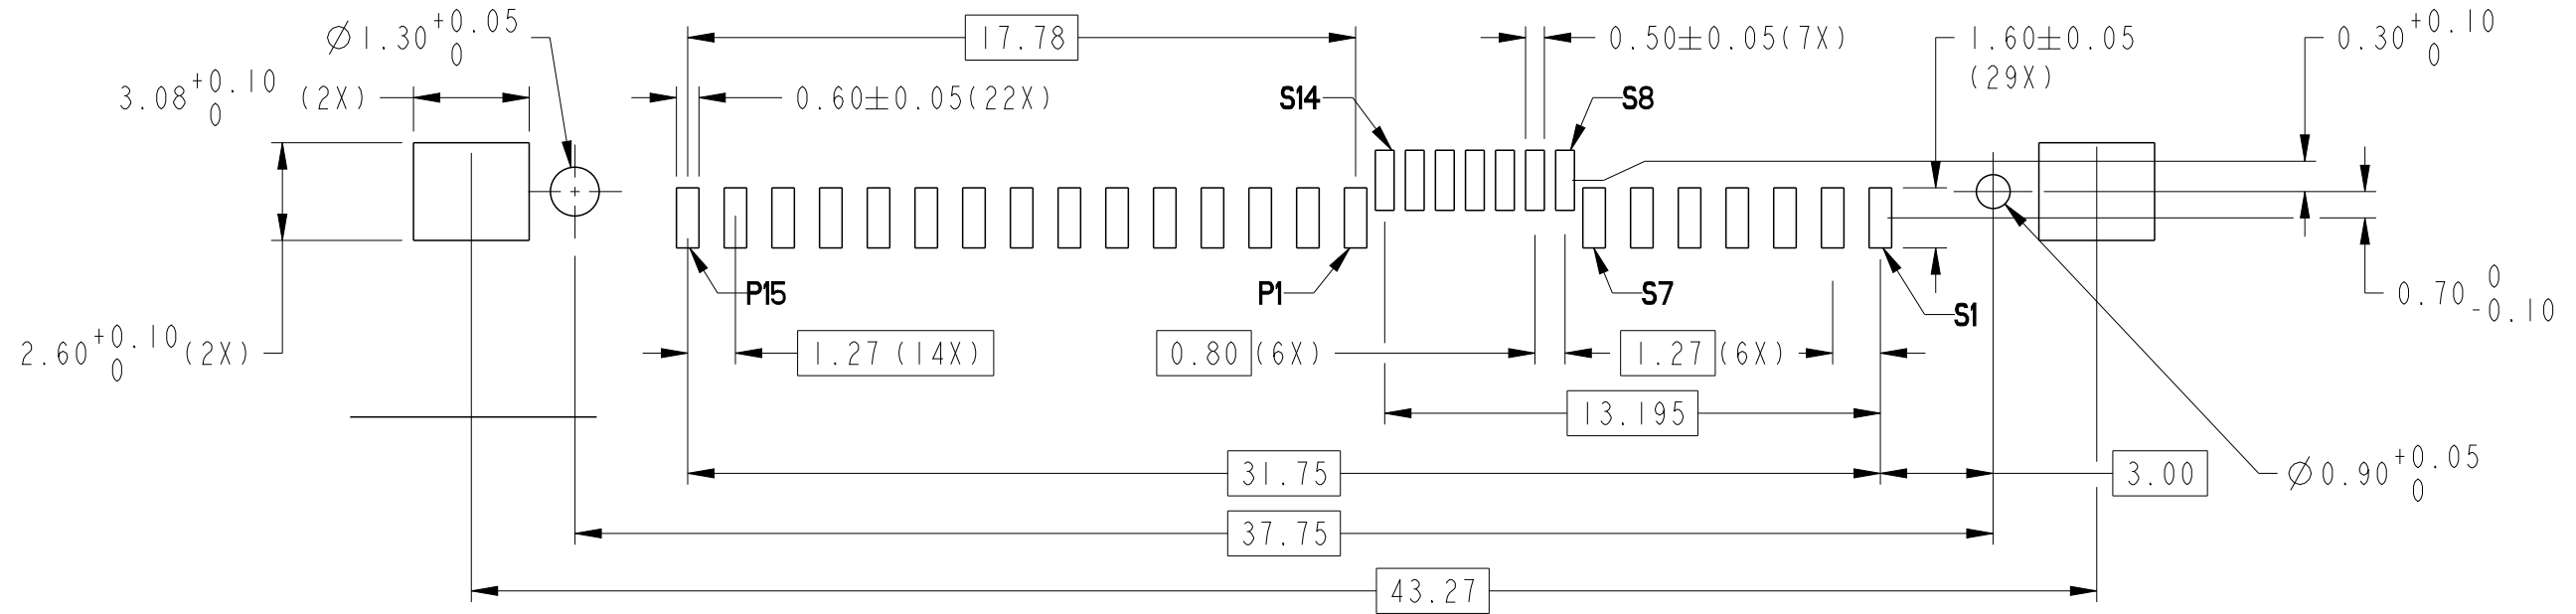


SCALE 5:1
RECOMMENDED SOLDER PAD LAYOUT

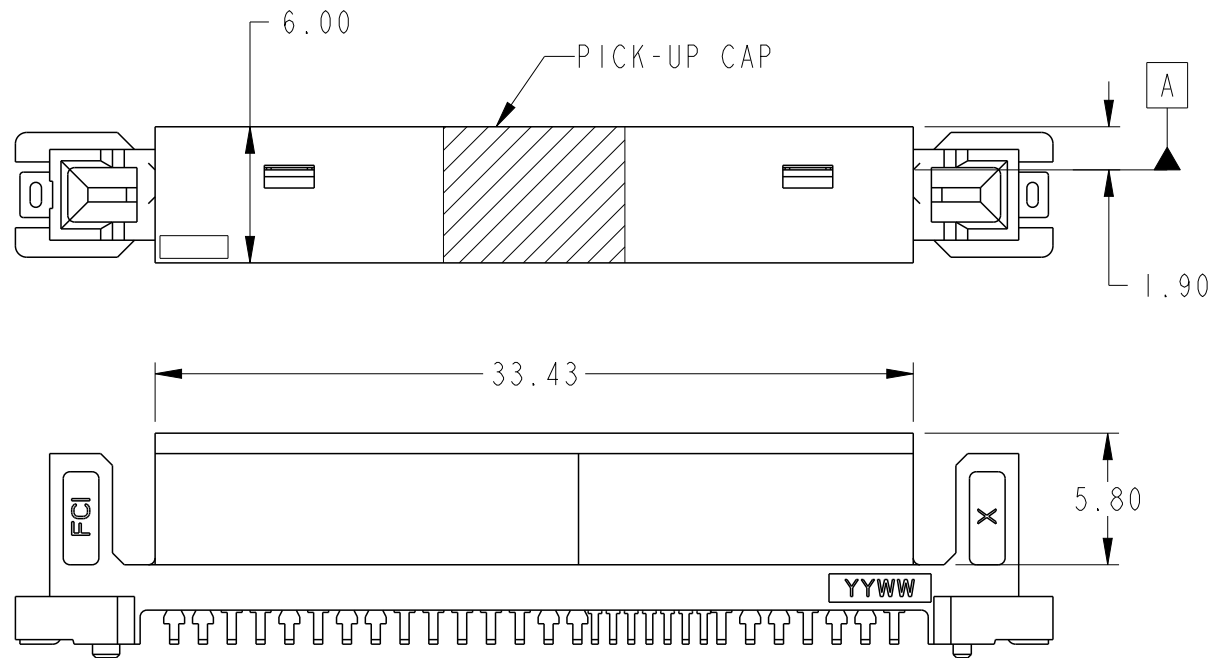

SCALE 3:1
WITH PICK-UP CAP ATTACHED
10131436-002

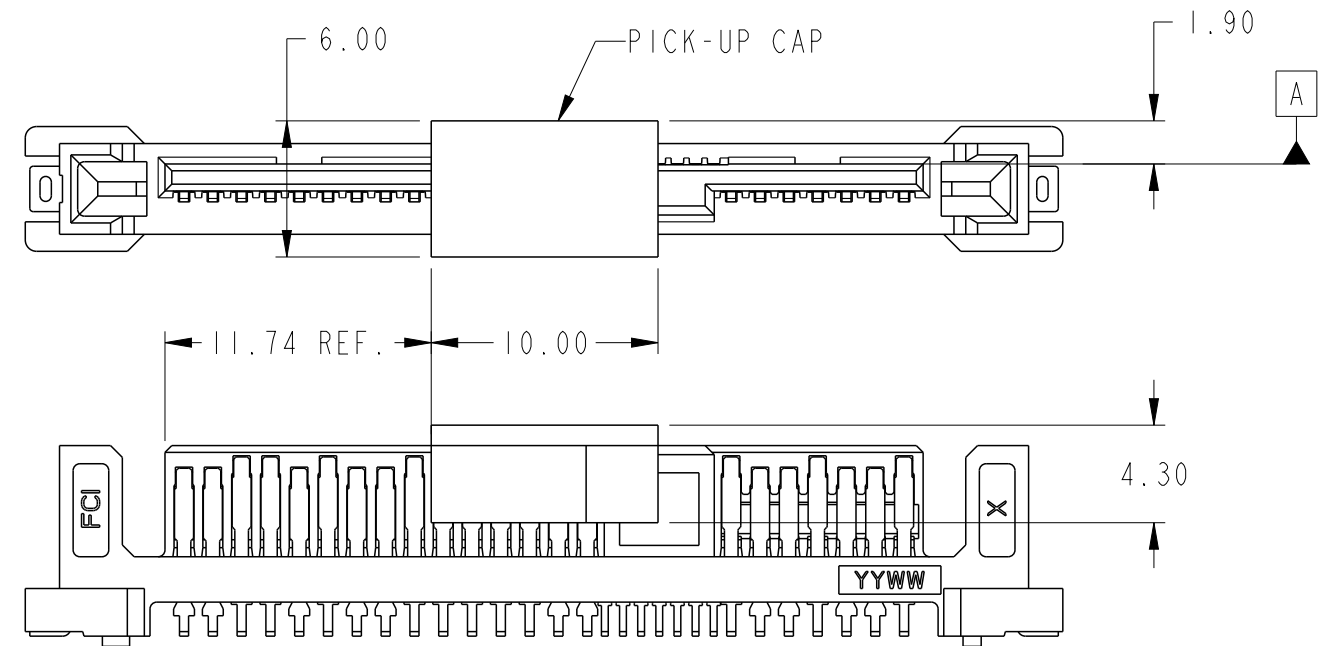


SCALE 3:1
WITH PICK-UP CAP ATTACHED
10131436-001

spec ref				dr	S Paulpandian	2014/11/21	projection 	MM 	size	A3	scale	3:1	
tolerance std				eng	Siew-Leong Lim	2016/06/03			ecn no	ELX-S-24203-1			
ASME Y14.5				chr	-	-							
-				appr	Koon-Poh Tay	2016/06/10							product family
										rel level			Released
surface 	linear	0.X	±0.40	Amphenol FCi	title 12G SAS PLUG VERTICAL SMT ASSY				dwg no	10131436		rev B	
		0.XX	±0.25										
		0.XXX	±-										
ASME Y14.5	angular	0°	±5°		cat. no.			Product - Customer Drw			sheet 2 of 3		

PRODUCT NUMBER	WITH PICK-UP CAP	PACKAGING	PLATING SPEC.	
10131436-001LF / -002LF 	NO	TRAY	SEE NOTE 2	
10131436-001CLF / -002CLF 	YES			
10131436-001C-TRLF / -002C-TRLF 				

- NOTES:
- 1. MATERIAL:
HOUSING: HIGH TEMPERATURE PLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
SOLDER TAB: COPPER ALLOY
 - 2. FINISH:
CONTACTS:
1.27um~2.54um NICKEL UNDERPLATE OVERALL,
2.54um~5.08um TIN (LEAD-FREE) ON SOLDER TAIL,
0.76um MIN Au ON MATING AREA.
SOLDER TAB:
1.27um~2.54um NICKEL UNDERPLATE OVERALL,
2.54um~5.08um TIN (LEAD-FREE) ON SOLDER TAIL,
 - 3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-004
 - 4. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN
 - 5. COPLANARITY FROM SEATING PLANE: 0.1mm MAX.
 - 6. THE PART SHALL HAVE DATE CODE (YYWW), VENDOR LOGO AND CAVITY NUMBER SHOWN AT THIS AREA.
 - 7. A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref				dr		S Paulpandian	2014/11/21		projection		MM		size		A3	scale		3:1								
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Siew-Leong Lim		2016/06/03						ecn no			ELX-S-24203-1							
ASME Y14.5						chr		-		-						rel level			Released							
-						appr		Koon-Poh Tay		2016/06/10						product family										
surface				linear		0.X		±0.40		Amphenol FCi		title		12G SAS PLUG		dwg no		10131436		rev		B				
																							0.XX		±0.25	
																							0.XXX		±-	
ASME Y14.5		angular		0°		±5°				cat. no.		Product - Customer Drw				sheet 3 of 3										