






Dimensions

inches [mm]

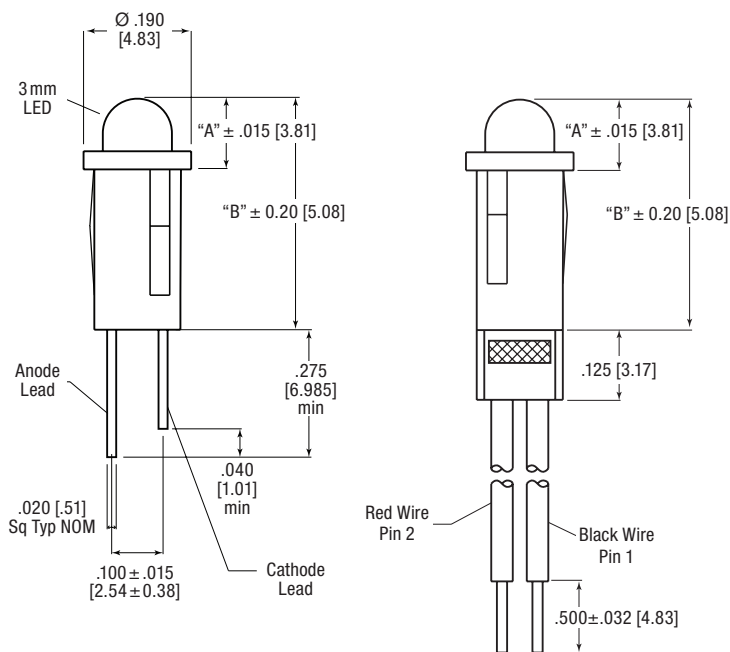

Certifications & Ratings

- RoHS Compliant

Application

Dialight's 558 series LED panel mount indicator is available with a variety of LEDs including AlInGaP and InGaN technology for high brightness applications, bi-color and integral resistors. These indicators are designed for a variety of applications such as:

- Fan tray assemblies
- Data center infrastructure (servers and storage)
- Networking equipment (switches and routers)
- Storage networking hardware (fiber channel host bus adapter cards)
- Next-Gen wireless infrastructure
- Electronic test & measurement instruments
- Communications testing equipment
- ... and many more!

Mechanical information

Mounting Hole Size: 0.155 – 0.158" (3.94 – 4.01 mm)

Max Panel Thickness: 0.031 – 0.062" (.787 – 1.57 mm)

Mounting Torque: N/A

Specifications

Voltage Options: 1.8 – 3.3 VDC typical, 5 VDC typical (resistor included)

Operating Temp: See table

Storage Temp: -55 °C to +100 °C (-67 °F to +212 °F)

Electrical Connection: Straight terminals for wire wrapping or 26 AWG lead wire

Housing: Valox UL94V-0 and enhances LED contrast

Connectors: Available upon request

Possible Connectors: Samtec IPD1-05-S-K

Terminals: Available upon request

Possible Terminals: Samtec CC79L-2630-01-S; AMP 1-104480-3

Ordering Information 558 Series

Part Number Guide

RoHS Compliant

5	5	8	-	X	X	X	X	-	0	X	X	F
										Wire Code		
LED Code (see below)										Standard	0	
										PVC Free	2	
										Termination Code		
										Straight Terminals	1	
										26 AWG 6" wire leads	3	
										26 AWG 14" wire leads	7	

LED Code	Color	Peak Wavelength (nm)	Intensity Typ. (mcd)	If Typ. (mA)	Vf Typ. (V/DC)	Viewing Angle	Max DC Forward Current (mA)	Type	Operating Temp	DIM "A"	DIM "B"
0102	Red	635	29	12	5	60	15	5 V Integral Resistor	-40 °C to +85 °C	0.101	0.381
0202	Green	565	19	12	5	60	15				
0302	Yellow	585	12.6	12	5	60	15				
3001	Red / Green	630 / 565	5.6 / 8.7 @10 mA	10/20	1.9 / 2.0 @20 mA	200	30 / 30	Bi-Color	-55 °C to +100 °C	0.101	0.381
3101	Red / Green	660 / 565	12.6 / 3.7	20	1.6 / 2.1	200	40 / 30				
3201	Yellow / Green	585 / 565	5.8 / 12.3	10	2.1 / 2.1	80	20 / 30				
0101	Red	635	8.7	10	2	60	30	High Efficiency Diffused	-25 °C to +85 °C	0.111	0.391
0201	Green	565	12.6	10	2.1	60	30				
0301	Yellow	585	8.7	10	2.1	60	20		-55 °C to +85 °C	0.101	0.381
0401	Orange	600	7	10	1.9	60	25				
1801	Red	660	60	20	1.8	60	40		-55 °C to +100 °C		
0803	Blue	468	57	10	3.2	100	30	Low Current Diffused	-40 °C to +100 °C	0.107	0.387
1101	Red	635	2.4	2	1.7	60	7		-55 °C to +100 °C	0.101	0.381
1201	Yellow	585	1.4	2	1.8	60	7	-40 °C to +100 °C			
1301	Green	565	1.6	2	1.9	60	7	-40 °C to +100 °C			
0501	Green	565	70	20	2.1	45	30	Non-Tinted / Non-Diffused	-40 °C to +85 °C		
0601	Yellow	592	200	20	1.9	45	50				
0701	Red	660	170	20	1.8	45	40				
6003	Blue	468	520	20	3.3	45	30				
6403	White	Y=.31 Y=.32	3000	20	3.3	45	30	-40 °C to +85 °C			
1501	Green	565	40	10	2.1	45	30	Tinted / Non-Diffused	-55 °C to +100 °C		
1601	Yellow	585	70	20	2.1	45	20		-40 °C to +100 °C		
1701	Red	660	170	20	1.8	45	40				
6203	Green	518	85	2	2.1	100	30	White Diffused	-45 °C to +85 °C		

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.