

CTLSH10-45M364

**SURFACE MOUNT
LOW VF
SILICON SCHOTTKY RECTIFIER**


www.centralsemi.com
DESCRIPTION:

The CENTRAL SEMICONDUCTOR CTLH10-45M364 is a high performance 10 amp silicon Schottky rectifier designed for applications as a by-pass diode in low profile solar panels.

**APPLICATIONS:**

- The CTLH10-45M364 is optimized for use as a by-pass diode in low profile solar (PV) panels.

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage

DC Blocking Voltage

RMS Reverse Voltage

Average Forward Current ($T_L=100^\circ\text{C}$)

Peak Forward Surge Current, $t_p=8.3\text{ms}$

Operating and Storage Junction Temperature

Thermal Resistance (Note 1)

Thermal Resistance

FEATURES:

- Low forward voltage, $V_F=0.49\text{V TYP @ 10A}$
- Low reverse leakage current, $I_R=20\mu\text{A TYP @ 45V}$
- High surge capability
- Low profile 1.2mm MAX package height

SYMBOL		UNITS
V_{RRM}	45	V
V_R	45	V
$V_R(\text{RMS})$	32	V
I_O	10	A
I_{FSM}	300	A
T_J, T_{stg}	-55 to +150	°C
Θ_{JA}	60	°C/W
Θ_{JL}	7.0	°C/W

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=45\text{V}$		20	50	μA
I_R	$V_R=45\text{V}, T_A=125^\circ\text{C}$		9.0		mA
BV_R	$I_R=0.5\text{mA}$	45			V
V_F	$I_F=5.0\text{A}$		0.44		V
V_F	$I_F=5.0\text{A}, T_A=125^\circ\text{C}$		0.34		V
V_F	$I_F=10\text{A}$		0.49	0.55	V
V_F	$I_F=10\text{A}, T_A=125^\circ\text{C}$		0.42		V
C_J	$V_R=10\text{V}, f=1.0\text{MHz}$		620		pF


Notes: (1) FR-4 epoxy PCB with minimum copper pad area.

CTLSH10-45M364


SURFACE MOUNT
LOW V_F
SILICON SCHOTTKY RECTIFIER




TLM364 CASE - MECHANICAL OUTLINE

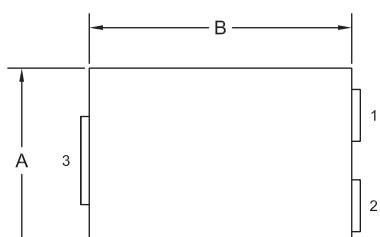

TOP VIEW

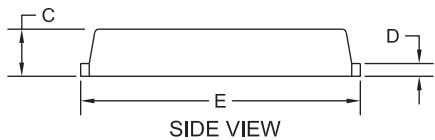

SIDE VIEW

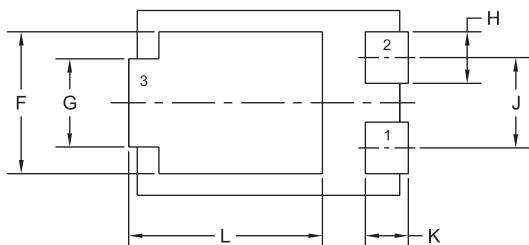


BOTTOM VIEW

SYMBOL	DIMENSIONS			
	INCHES	MILLIMETERS	MIN	MAX
A	0.167	4.25	0.172	4.35
B	0.238	6.05	0.243	6.15
C	0.039	1.00	0.048	1.20
D	0.009	0.25	0.014	0.35
E	0.250	6.35	0.262	6.65
F	0.128	3.25	0.136	3.45
G	0.076	2.15	0.085	2.21
H	0.044	1.30	0.052	1.10
J	0.083	2.10		
K	0.035	0.90	0.044	1.10
L	0.171	4.35	0.183	4.65

TLM364 (REV:R0)

SUGGESTED MOUNTING PADS
(Dimensions in mm)

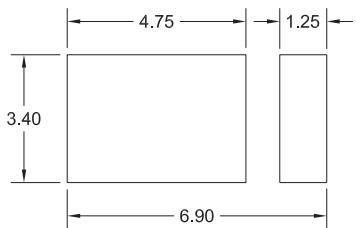

R0

LEAD CODE:

- 1) Anode
- 2) Anode
- 3) Cathode

MARKING CODE: CTSH1045

R1 (2-August 2012)