Common mode Noise Filters

Type: **EXCX4CE**





Features

- Small and thin (L 0.65 mm×W 0.50 mm×H 0.30 mm)
- Noise suppression of high-speed differential transmission lines with little influence of waveform rounding on signal transmission
- Strong multilayer/sintered structure, excellent reflow resistance and high mounting reliability
- Lead, halogen and antimony-free
- RoHS compliant


Recommended Applications

- Smartphones, Tablet PCs and DSC
- Noise suppression of high-speed differential data lines such as MIPI, USB and LVDS

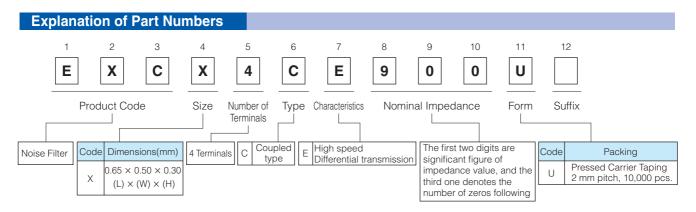


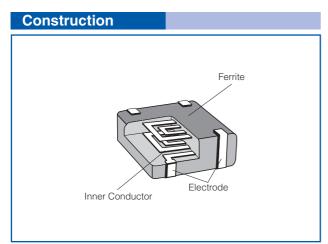

Dimensions in mm (not to scale)

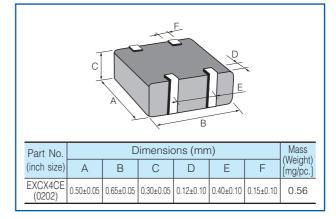

Circuit Configuration (No Polarity)

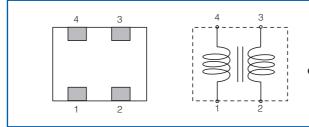

• The pin numbers shown here are for reference purposes only. Confirm the actual pin number arrangement with the exchanged specification documents.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.


Panasonic

Common mode Noise Filters

Ratings					
Part Number	Impedance (Ω) at 100 MHz		Rated Voltage	Rated Current	DC Resistance
	Common Mode	Differential Mode	(V DC)	(mA DC)	(Ω) max.
EXCX4CE600U	60 Ω±20 %	18 Ω max.	5	100	2.4±30 %
EXCX4CE900U	90 Ω±20 %	20 Ω max.	5	100	3.0±30 %

● Category Temperature Range -40 °C to +85 °C

Impedance Characteristics (Typical)

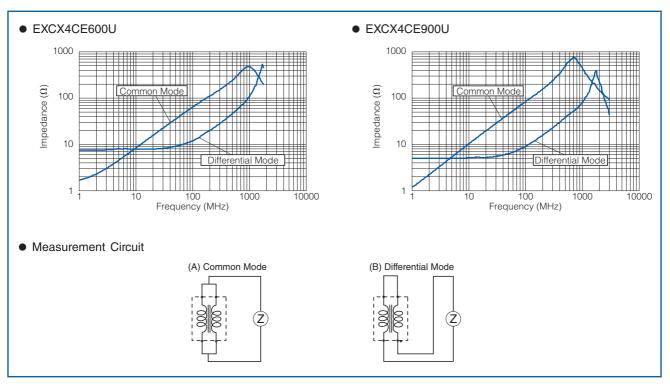

■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions, Please see Data Files

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

EXC-X4CE900X EXC-X4CE900U EXC-X4CE600U