

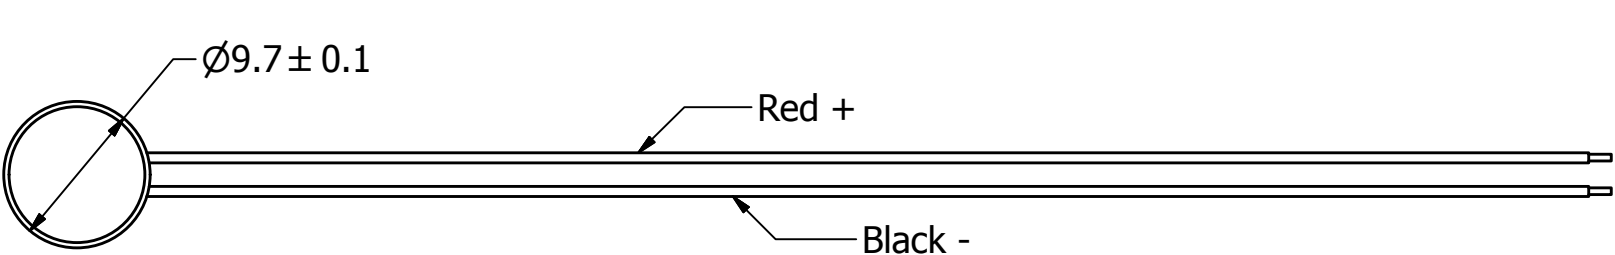
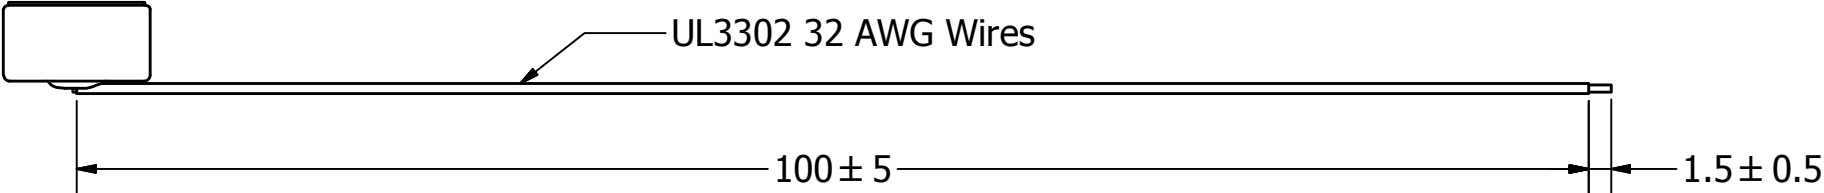


SPECIFICATIONS		
PARAMETERS	VALUES	UNITS
DIRECTIVITY	NOISE CANCELING	-
SENSITIVITY	-54 ± 4	dB
STANDARD OPERATING VOLTAGE	1.5	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mA
IMPEDANCE	0.68	kOhm
SIGNAL TO NOISE RATIO (MIN.)	>55	dB
TERMINAL	WIRE LEADS	-
FREQUENCY RESPONSE	100 - 10,000	Hz

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	7/14/2015	B.R.

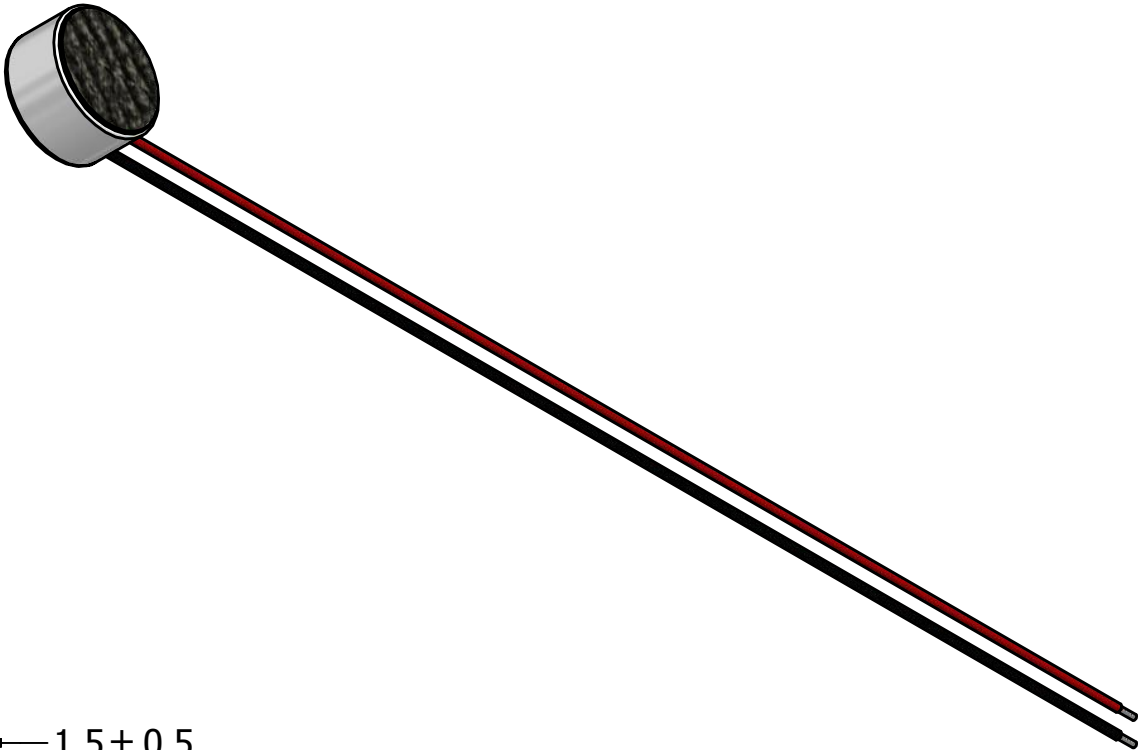

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date		
		M.V.	7/14/2015	M.V.	7/14/2015	B.R.	7/14/2015	7/14/2015		
	A3	 pui audio [™] inc a projects unlimited company			ANM-5254L-LW100-R					
ANM-5254L-LW100-R.idw					Microphone		Edition	Sheet		
					-					1 / 1