


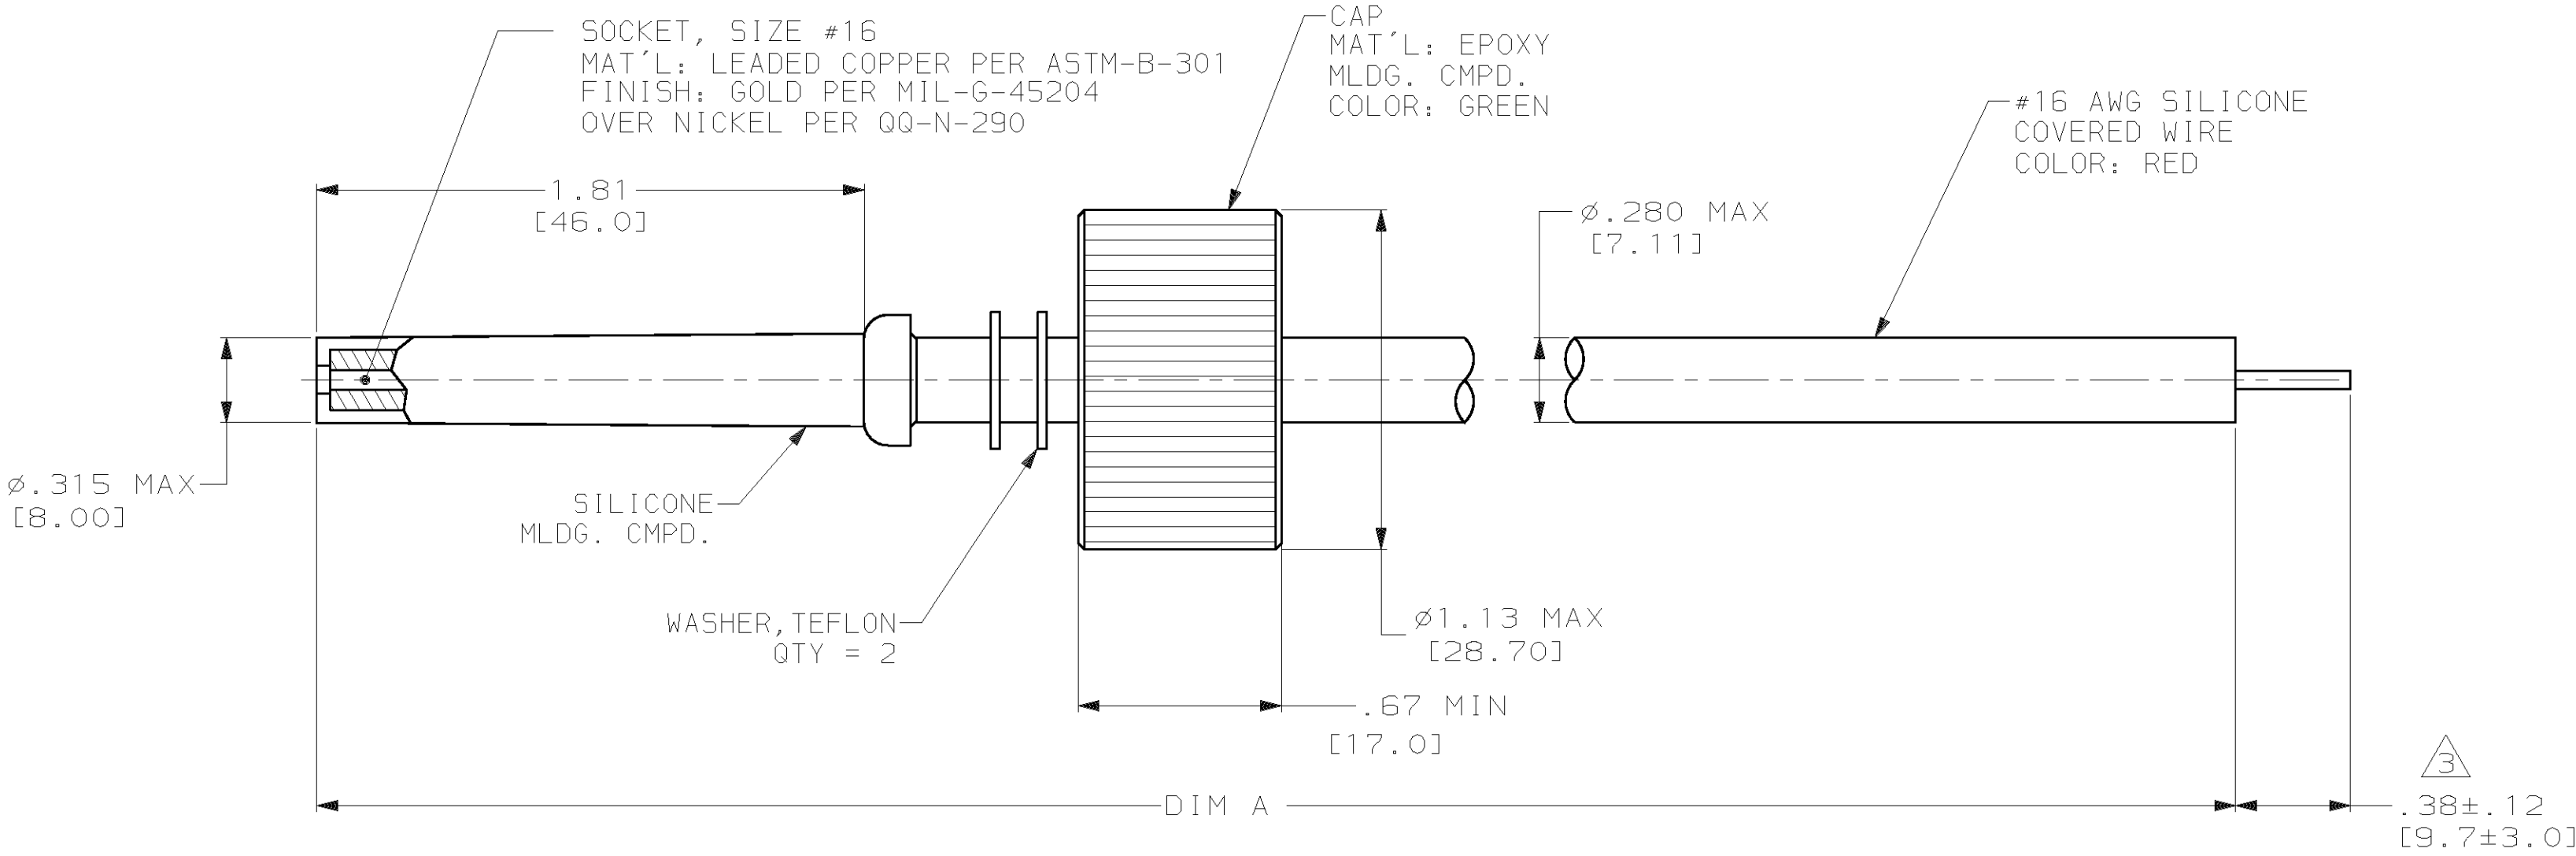

1. MARKED PER MIL-STD-130.
2. LEADS WILL MATE WITH AMP LGH-3 RECEPTACLE WITH 1.81 [46.0] BARREL DEPTH.
3. PIGTAIL IS SOLDER DIPPED.
4. OPERATING VOLTAGE: 40 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

67.00±.67 [1701.8±17.0]	1218110-2
60.00±.60 [1524.0±15.2]	1218110-1
DIM A	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± -	DR 1-21-98 C.C.THOMAS	AMP AMP Incorporated Harrisburg, PA 17105-3608	
SEE CALLOUTS	CHK 1-21-98 D.EABY		
MATERIAL	APPD 1-21-98 D.EABY	NAME	
	RLSE 1-21-98 C.C.THOMAS		
FINISH	PRODUCT SPEC	LEAD ASSY, SGL END, LGH-3 WIRE COLOR: RED	
	SEE CALLOUTS		
WEIGHT	APPLICATION SPEC	SIZE	CAGE CODE
	SEE CALLOUTS	SCALE	DRAWING NO
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		2:1	00779
		C=1218110	
		SHEET 1 OF 1	