

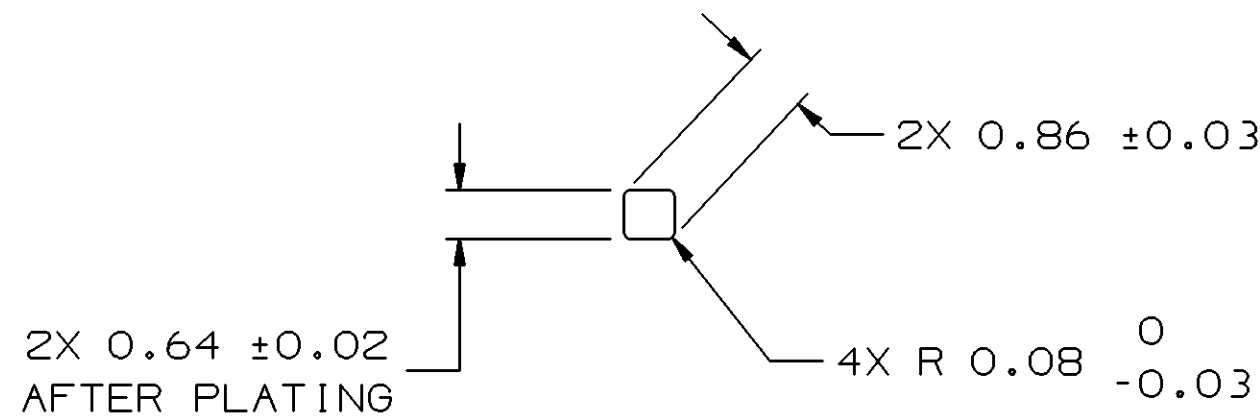


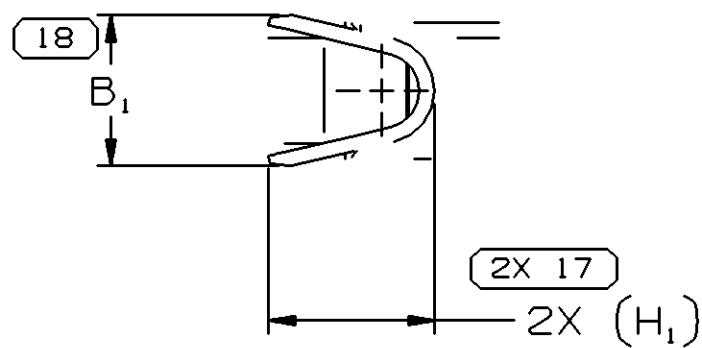


RECOMMENDED MATING PIN DESIGN


REFER TO SPECIFIC PIN DRAWING FOR COMPLETE REQUIREMENTS
(I.E. MATERIAL, PLATING, DIMENSIONS, ETC)

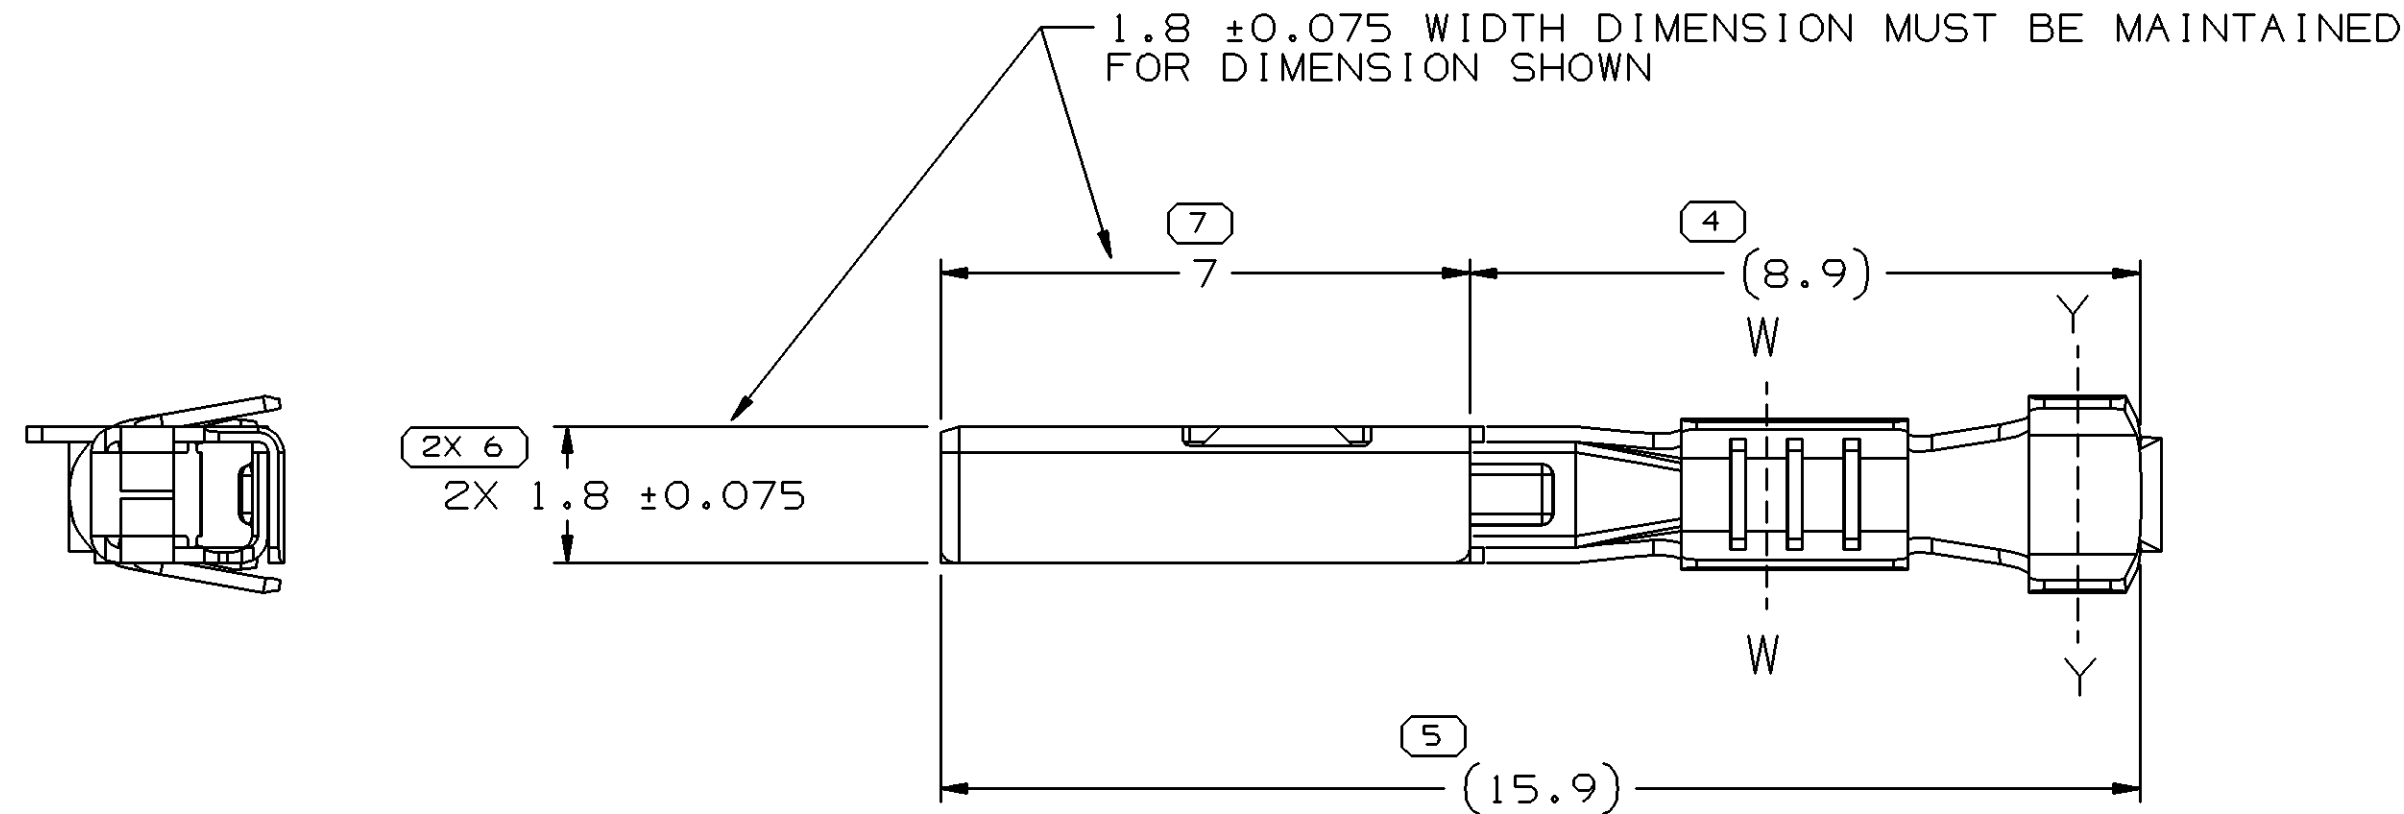

VIEW TO W - W

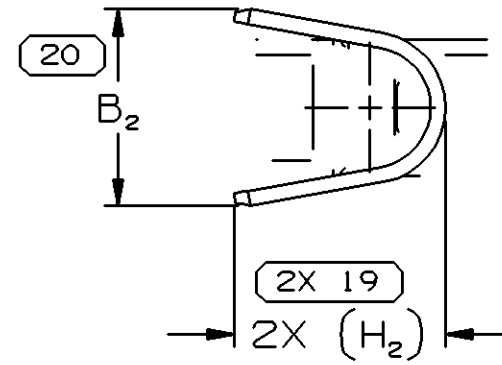

VIEW TO Y - Y

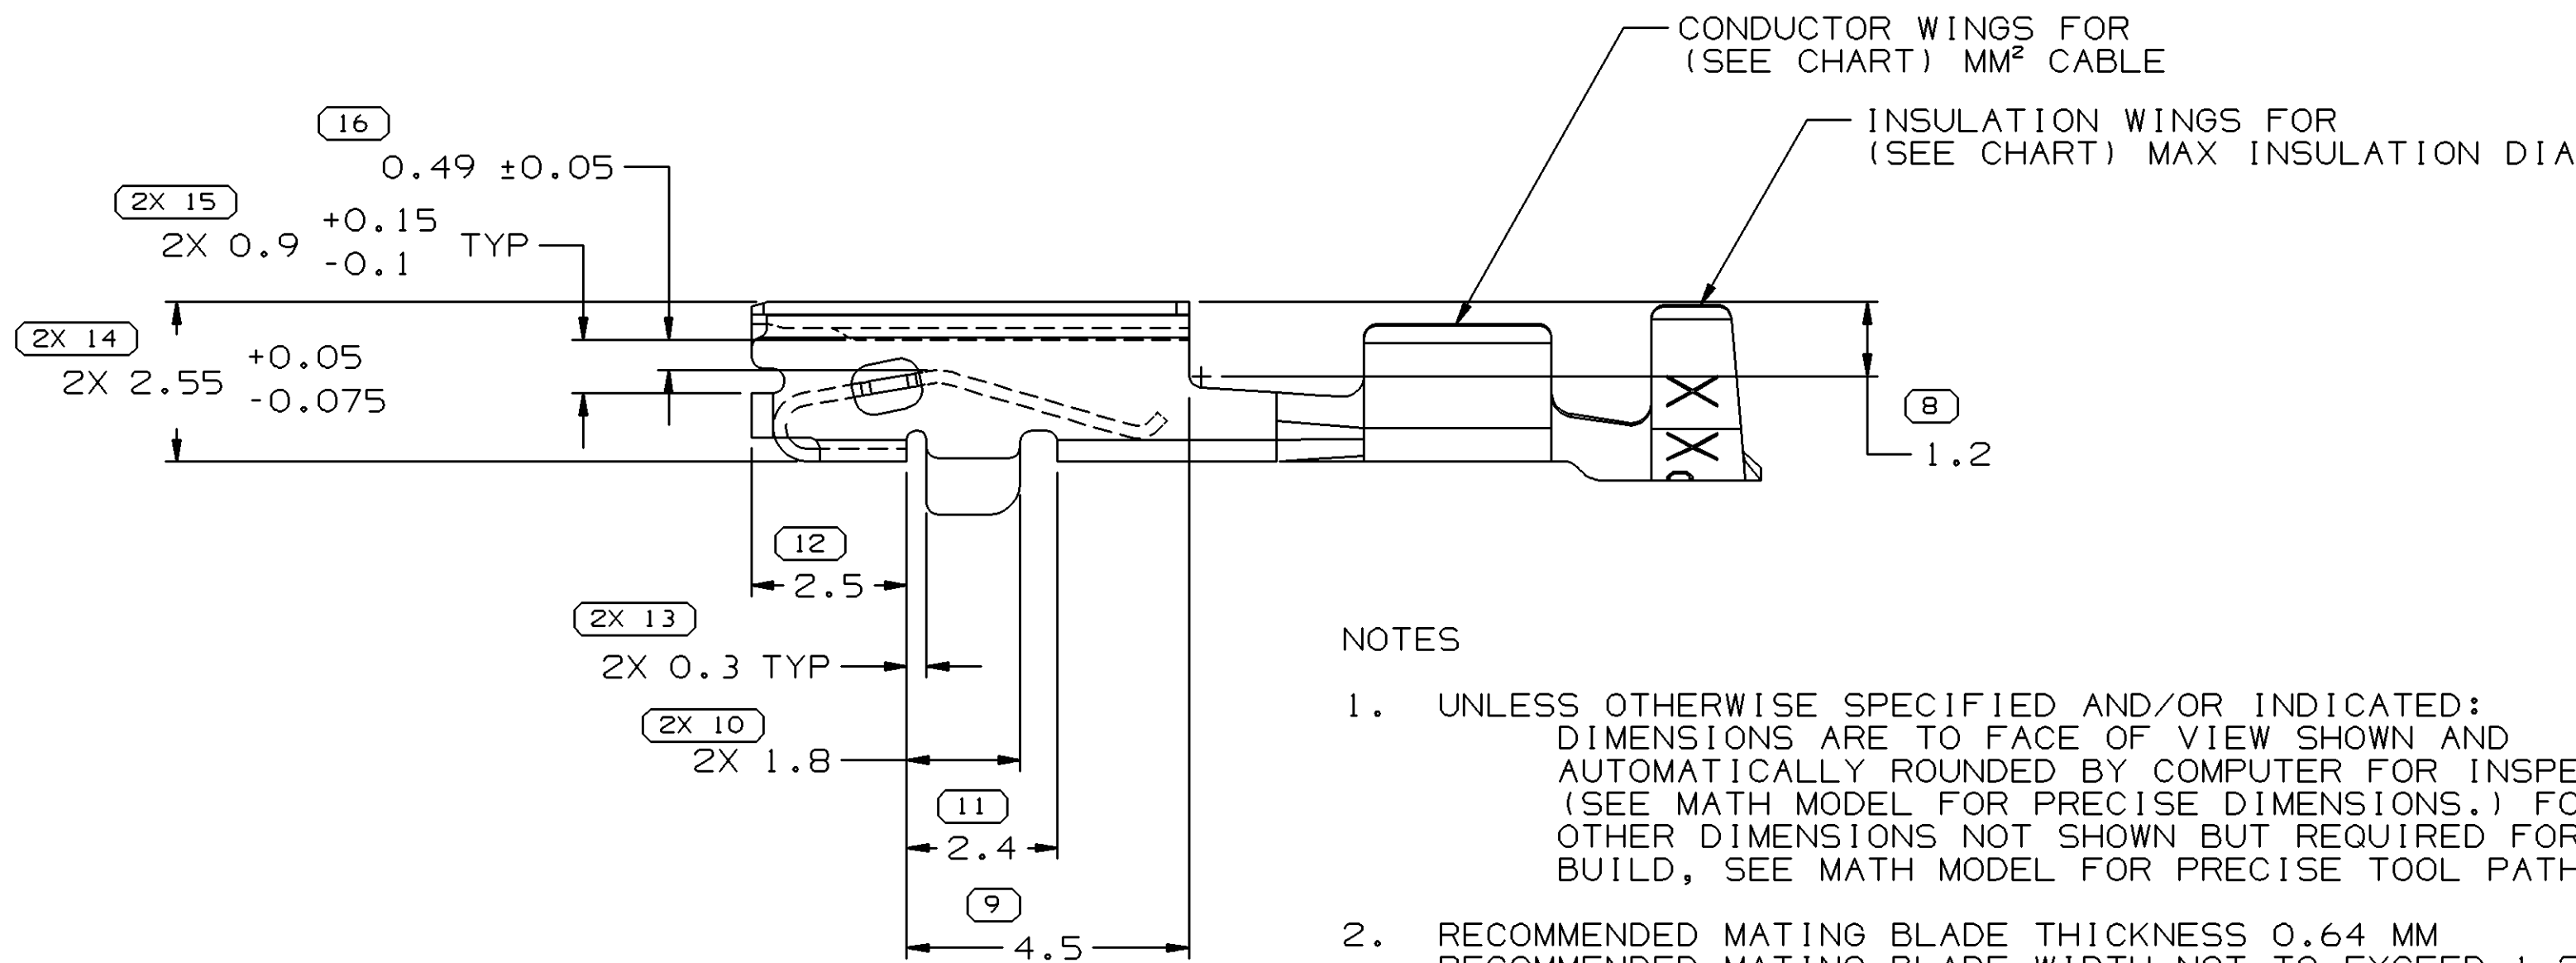

NOTES



- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- RECOMMENDED MATING BLADE THICKNESS 0.64 MM
RECOMMENDED MATING BLADE WIDTH NOT TO EXCEED 1.2 MM
- MAXIMUM CURRENT CAPACITY IS 7 AMPS
- MATING COMPONENTS OR EQUIVALENT:
CONNECTOR 15477027
PIN 15450119 (SEE RECOMMENDED MATING PIN DESIGN VIEW)
- MAX. INSULATION CRIMP WIDTH 1.9 MM
MAX. INSULATION CRIMP HEIGHT 2.8 MM
- REFER TO SAE/USCAR-2 APRIL 2001
(TEMPERATURE CLASS 1, VIBRATION FOR COMPONENTS
NOT COUPLED TO ENGINE) FOR PRODUCT PERFORMANCE REQUIREMENTS.
- SEALING CODE 0 - UNSEALED

PE131690	U	01	-	-	0.2 X 27.5	M3659B76 C42500 EX HD	0.13 - 0.22	25	1.01 - 0.88	1.4	1.8	1.6	1.7
15445905	R	05	-	-	0.2 X 27.5	M3659B76 C42500 EX HD	0.75	18	1.9 - 1.7	2.5	2.6	2.7	2.9
15445904	R	05	-	-	0.2 X 27.5	M3659B76 C42500 EX HD	0.35 - 0.5	21	1.83 - 1.47	2	2.6	2.2	2.9
PART NO	STG	REV	N/P	STATUS	MAT'L SIZE	MAT'L SPEC	SIZE (MM²)	ID	DIA	B ₁ ±0.2	B ₂ ±0.3	(H ₁)	(H)

SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL  DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	24
	LAST NO. USED	20


MISSING SYMBOLS
1 - 3

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG						
30AU02	R	01	-	-		15445904 & 15445905 - RELEASED	228663	GLG	JVM	ADK
17FE03	R	02	-	-		ALL PARTS - REVISED	236064	JVM	JVM	ADK
25JN03	R	03	-	-		ALL PARTS - REVISED GRAPHICS, 0.49 ±0.05 WAS 0.45 ±0.05 AND 2X 1.8 ±0.075 WAS 1.8 ±0.075	242577	JAA	JAA	ADK
09OC03	R	04	-	-		ALL PARTS - REVISED GRAPHICS, REVISED NOTE #3 AND UPDATED PDM ATTRIBUTES	247214	EES	EES	AD
06N003	R	05	-	-		ALL PARTS - REVISED NOTES; REMOVED SYMBOLS 1, 2, 3	248579	SHH	SHH	NN
18FE04	R	06	-	-		UPDATED ATTRIBUTES	252025	END	END	AD
19OC04	-	07	-	-		ADDED P/N PE131690	260186	MB	MB	JD

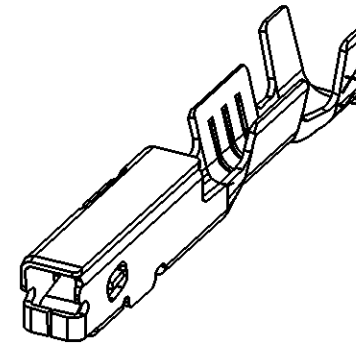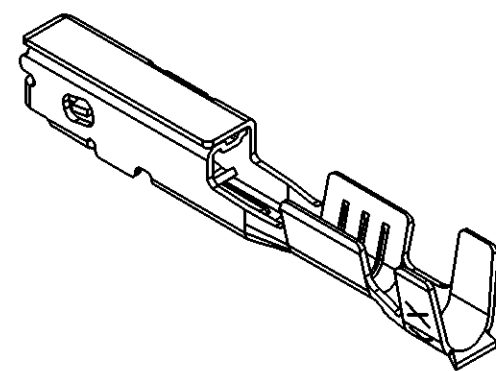

VIEWS SCALE DO NOT REFLECT
ACTUAL PARTS SIZE

6 PROCESS SENSITIVE DIMENSION	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART D
FROM 0 TO 12	>12
TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.1	±0.2
ANGULAR TOLERANCE ±2°	

DWG TYPE PART DRAWING	
STYLE	
VOLUME (CM³)	DISTR CODE D
UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #1 PERFECT FORM AT MMC1 DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE. ALL DIMENSIONS ARE IN MILLIMETERS	
REFERENCE	
THIRD ANGLE PROJECTION	DO NOT SCALE
	

DELPHI	
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH	
DR	DATE
APVD1 G. LOPEZ G.	30AU02
APVD2 J. VILLAMIL	02SE02
APVD3 KASEGNE ALEX	03SE02
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
MATERIAL SEE CHART	
DRAWING NAME TAXI TERM F MICRO HVT	
DRAWING NUMBER 15443837	
SIZE A1	SCALE 10:1
FRAME NO 1 OF 1	SHEET NO 1 OF 2
STG -	REV 07
N/P -	