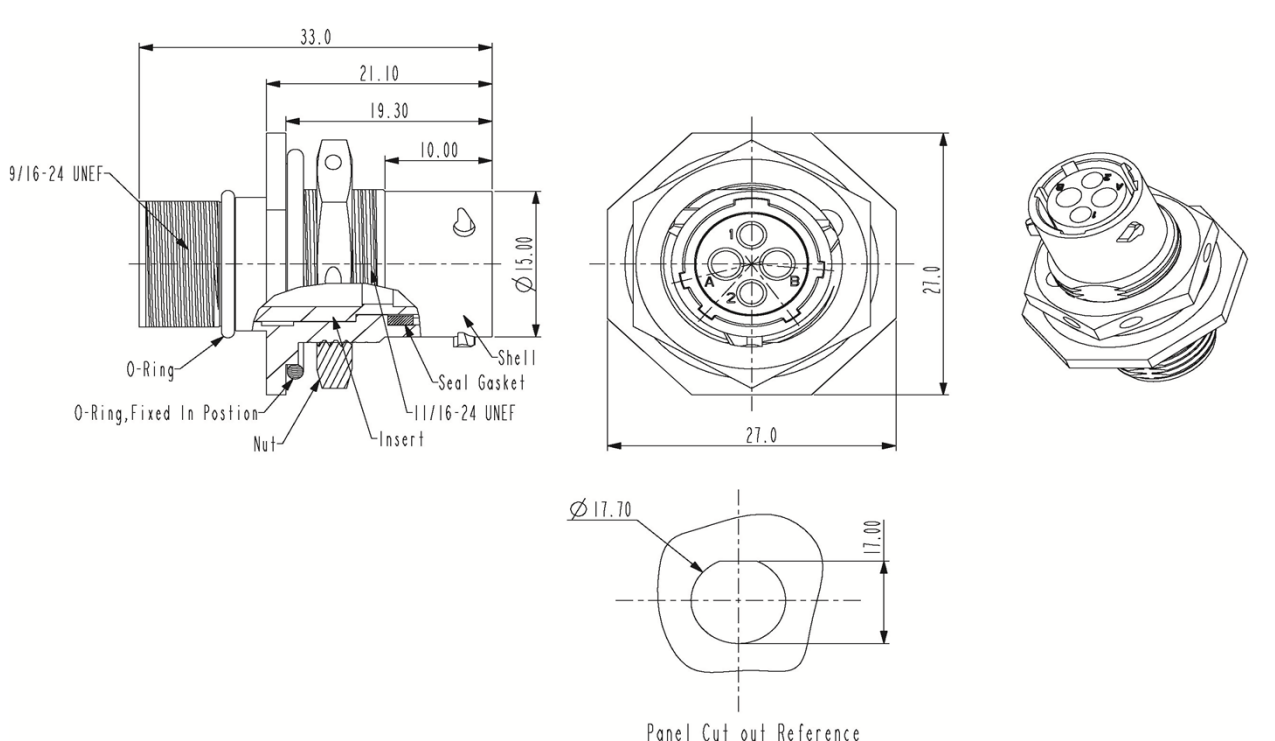


CONFIGURATION		PART NUMBER	
Female Jamnut Receptacle, 4 Pin, 20 Awg & 16 Awg, Shell 10		RT07102SNH	
DIMENSIONS			
 <p>Technical drawing of the RT07102SNH connector showing side, front, and panel cutout views with dimensions.</p> <p>Side View Dimensions:</p> <ul style="list-style-type: none"> Total length: 33.0 Length to shell: 21.10 Length to nut: 19.30 Length to insert: 10.00 Shell diameter: $\varnothing 15.00$ <p>Front View Dimensions:</p> <ul style="list-style-type: none"> Overall width: 27.0 Overall height: 27.0 <p>Panel Cut out Reference Dimensions:</p> <ul style="list-style-type: none"> Outer diameter: $\varnothing 17.70$ Inner diameter: 17.00 <p>Labels in Side View:</p> <ul style="list-style-type: none"> 9/16-24 UNEF O-Ring O-Ring, Fixed In Position Nut Insert Seal Gasket Shell 11/16-24 UNEF 			
TECHNICAL DATA			
TEMPERATURE RANGE:	-40°C to + 105°C		
PROTECTION:	IP67 in mated condition and in combination with sealed backshell		
VOLTAGE RATING:	350V		
HOUSING BODY:	Zinc Alloy, Nickel Plated		
COUPLING NUT:			
INSERT:	Glass-filled Thermoplastic UL94-V0		
SEAL:	NBR		
CURRENT:	2-16Awg at 13A and 2-20Awg at 5A		
CONTACT SIZE:	20 Awg & 16 Awg		
APPROVALS:	UL ECBT2		