





LOC	DIST	REVISIONS					
		REV	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53	Y		REVISED PER ECR-17-006277	24MAY2017	BW	KR

D


C

B

A

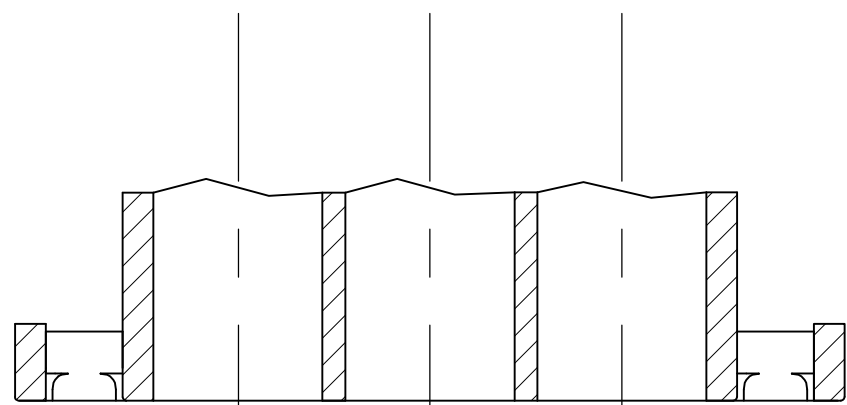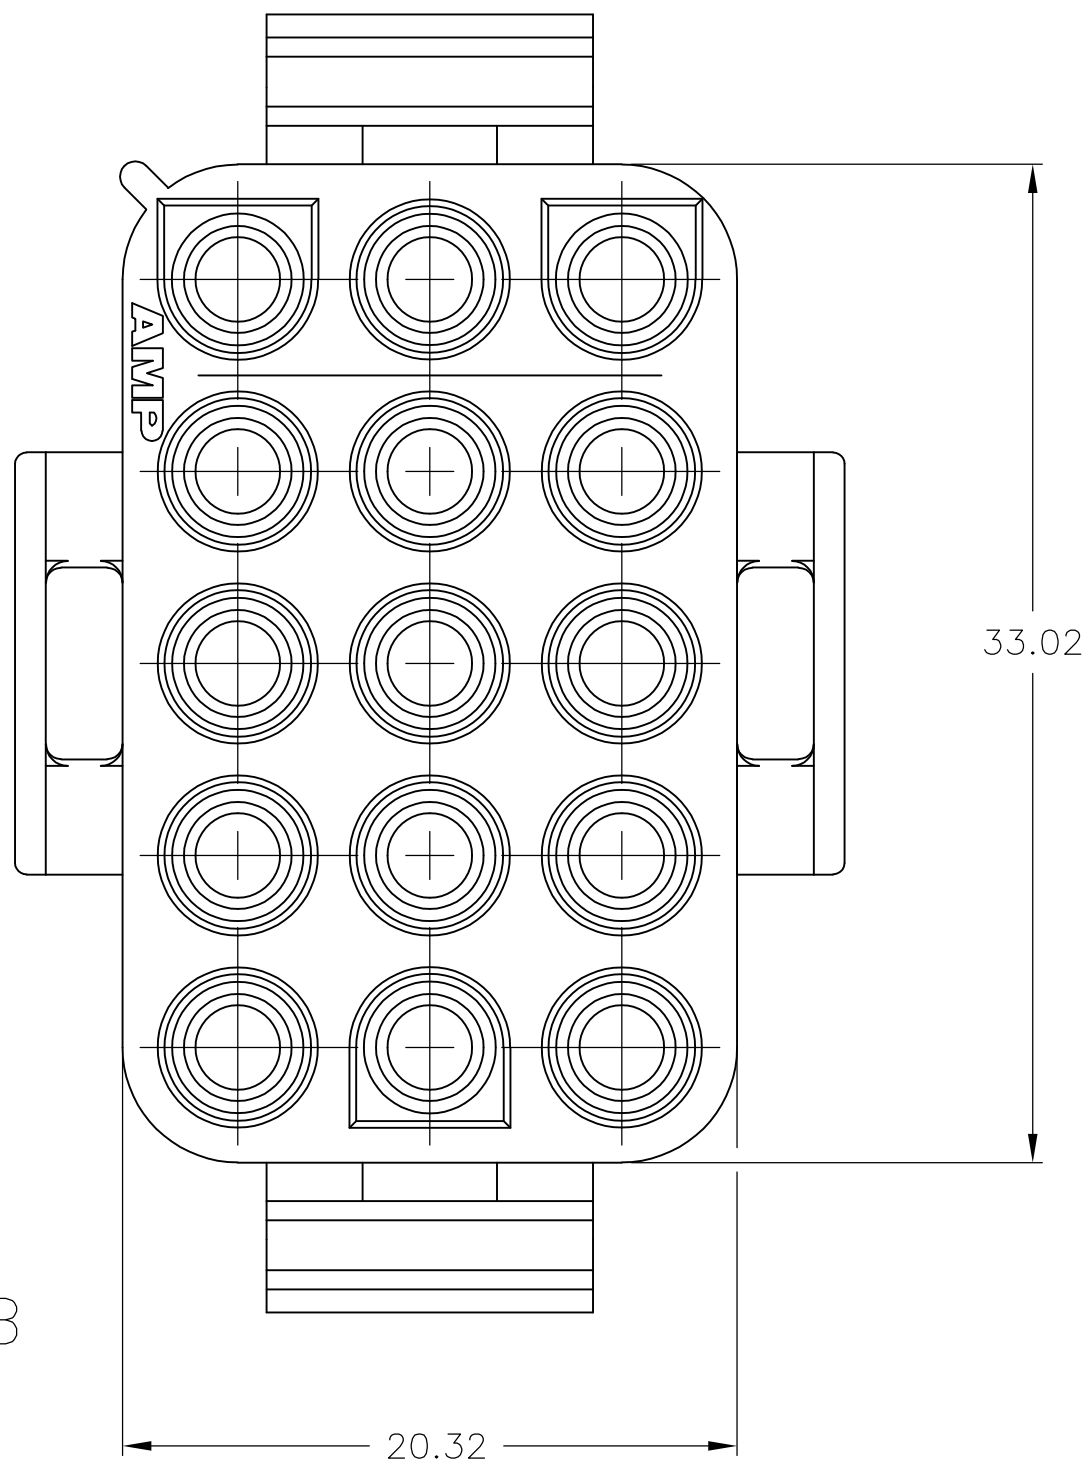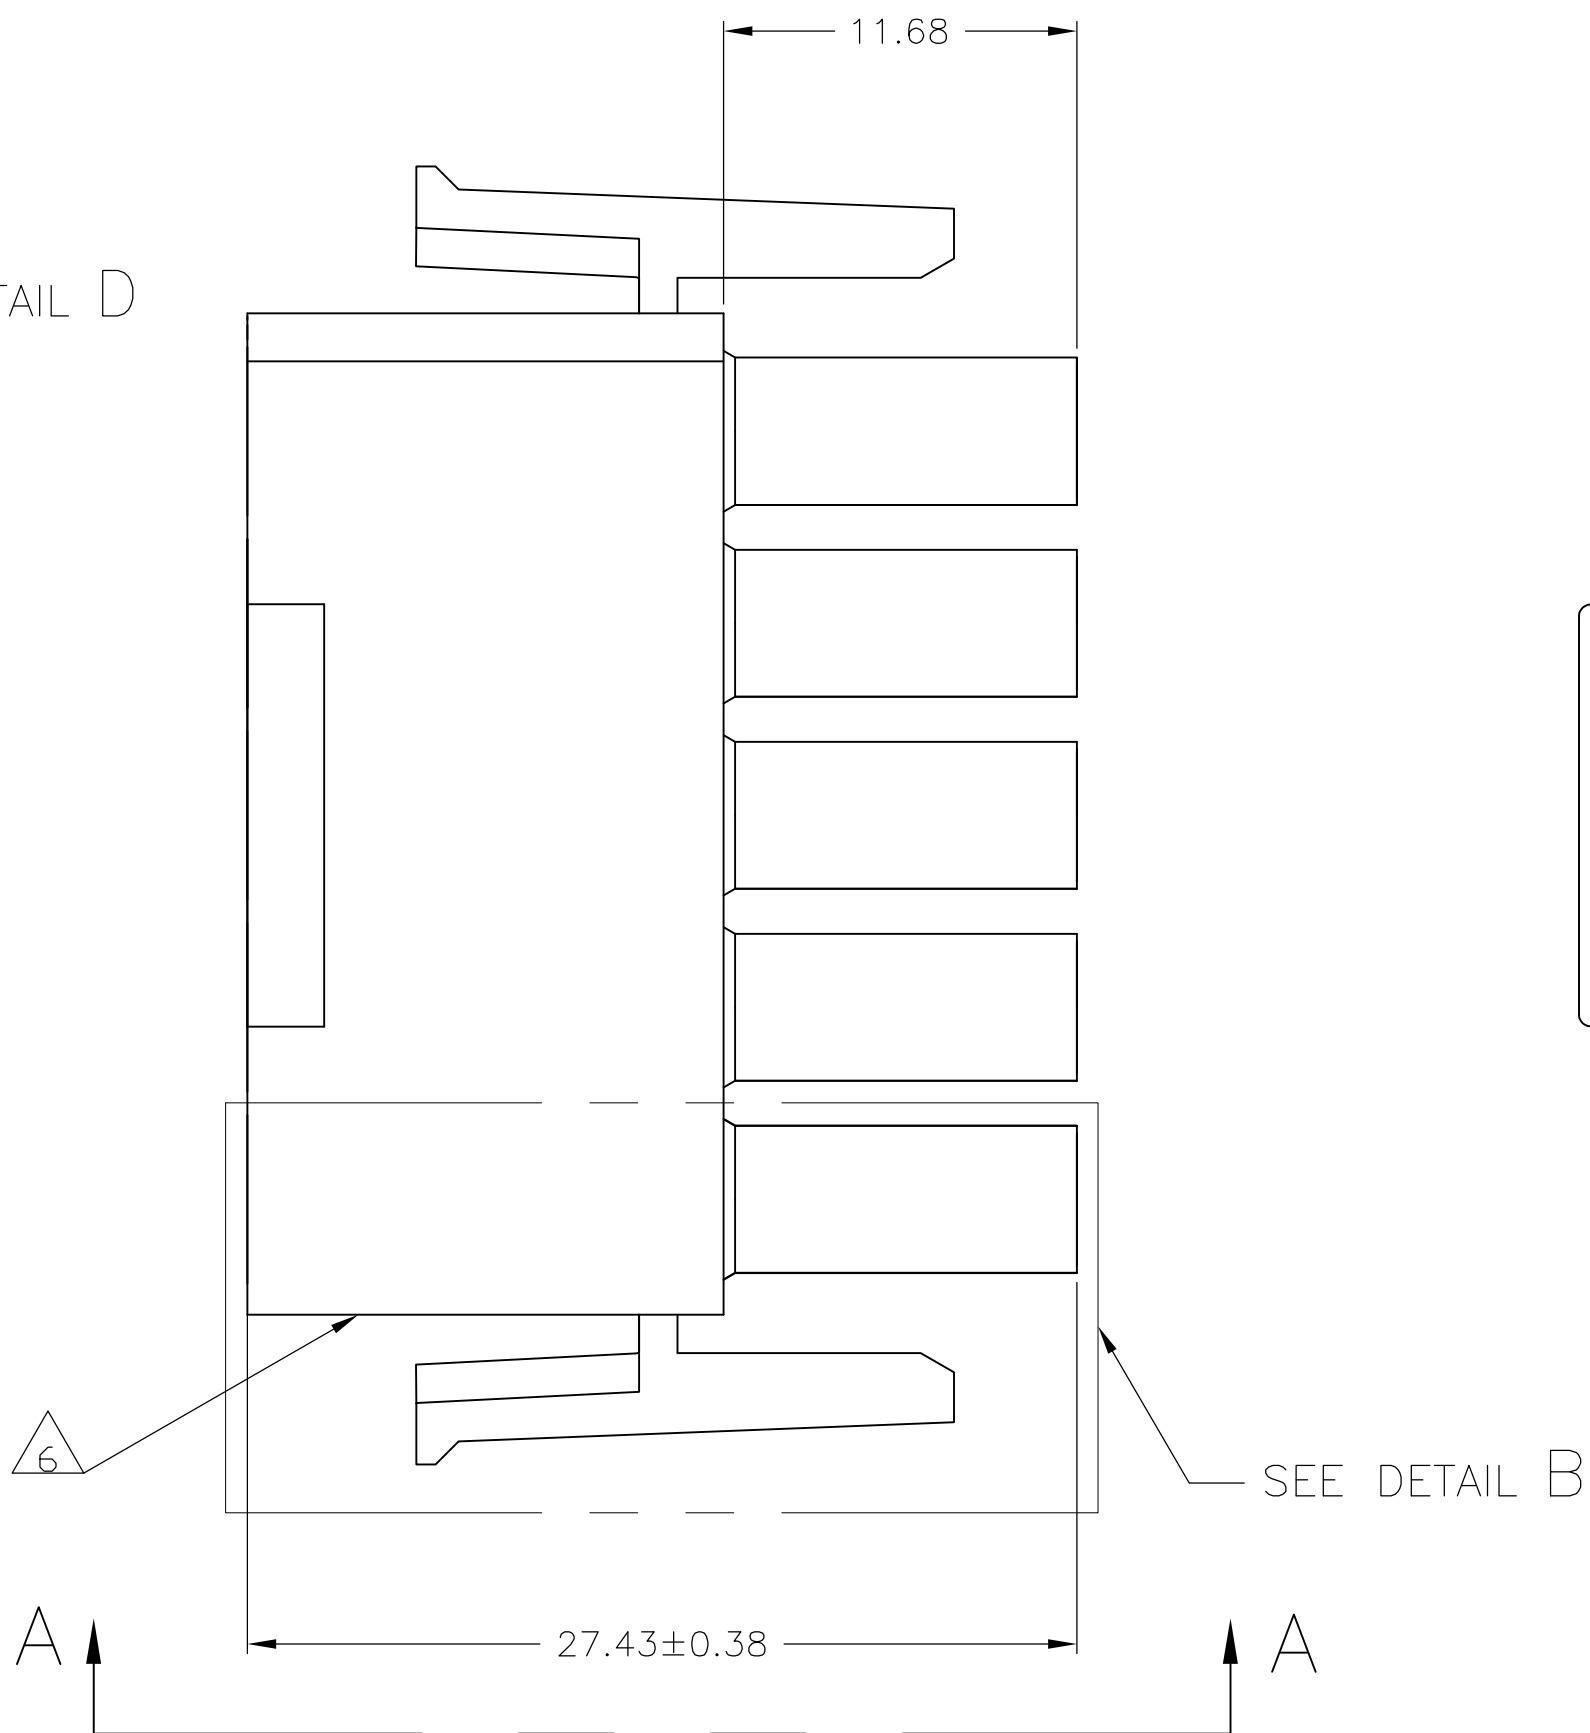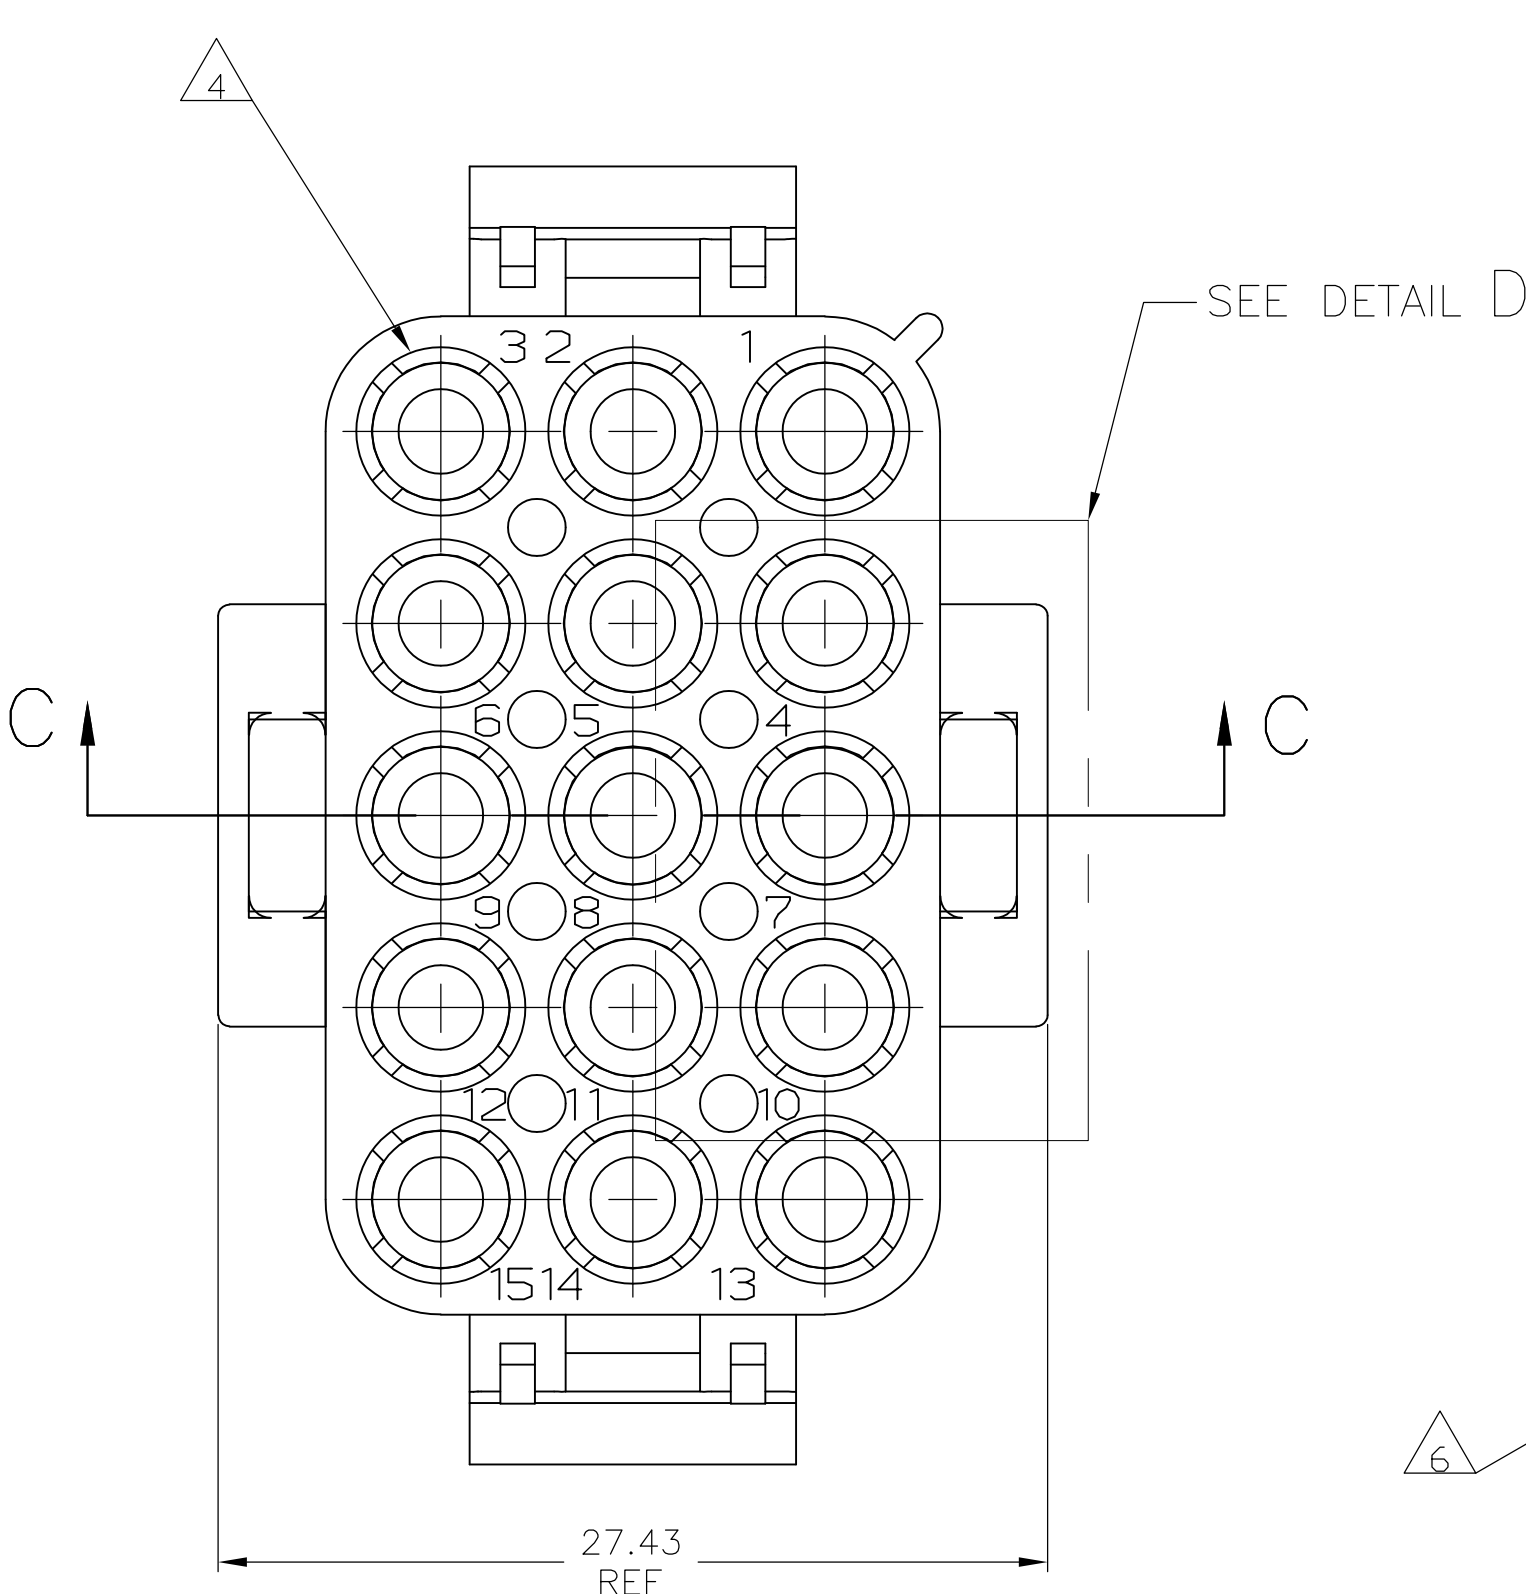


PARTIAL SECTION C-C

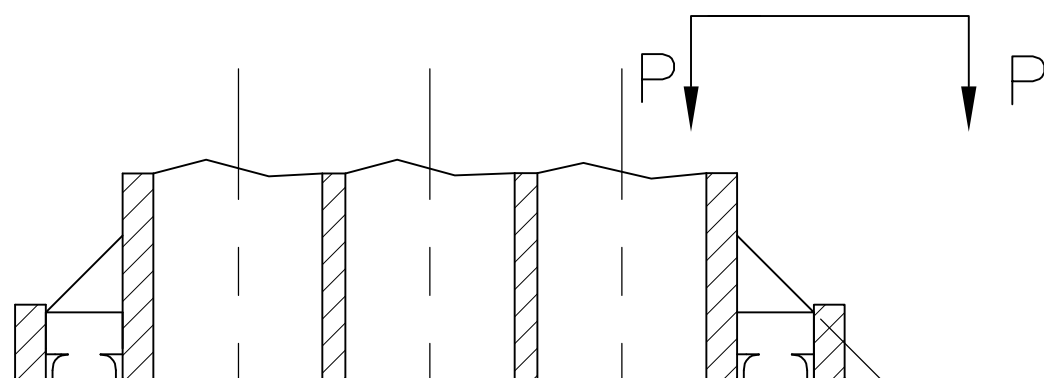


PARTIAL SECTION C-C
OPTIONAL CONSTRUCTION



45°
REF

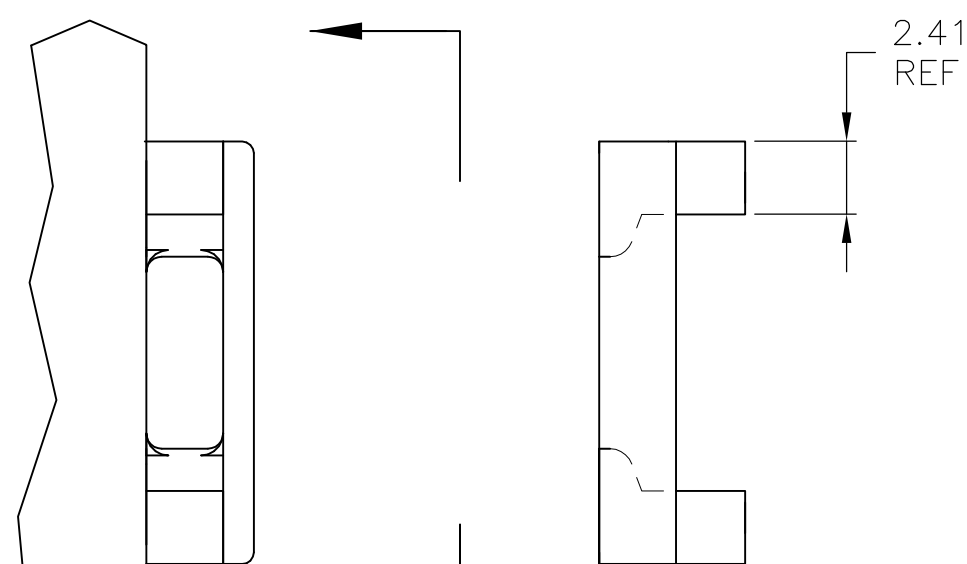


VIEW P
OPTIONAL CONSTRUCTIONS

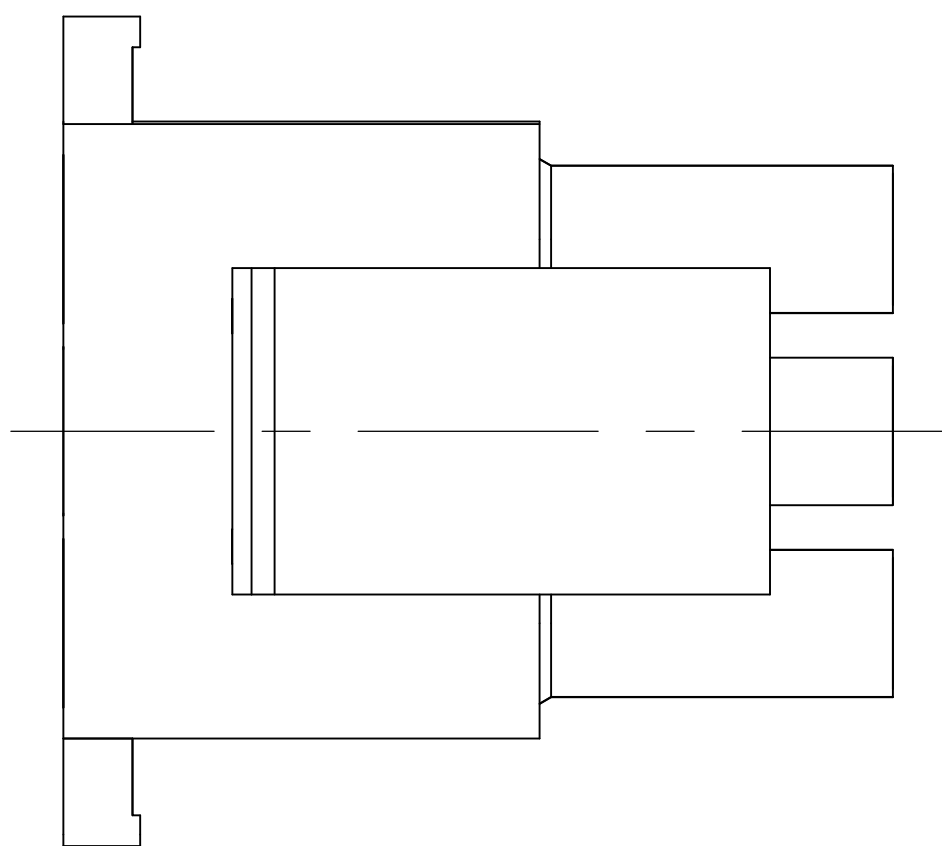

VIEW A-A
350736-4 ONLY

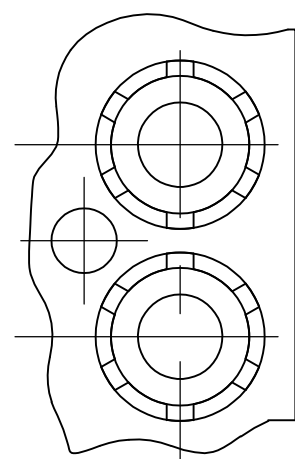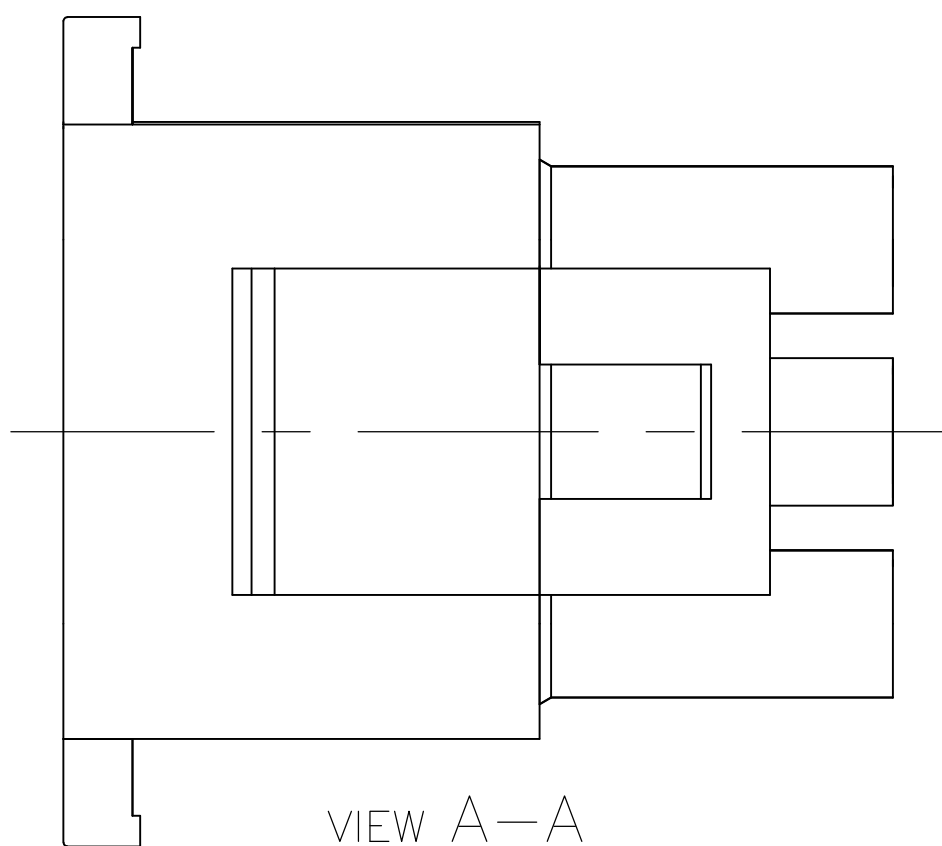


PARTIAL DETAIL D
OPTIONAL CONSTRUCTION

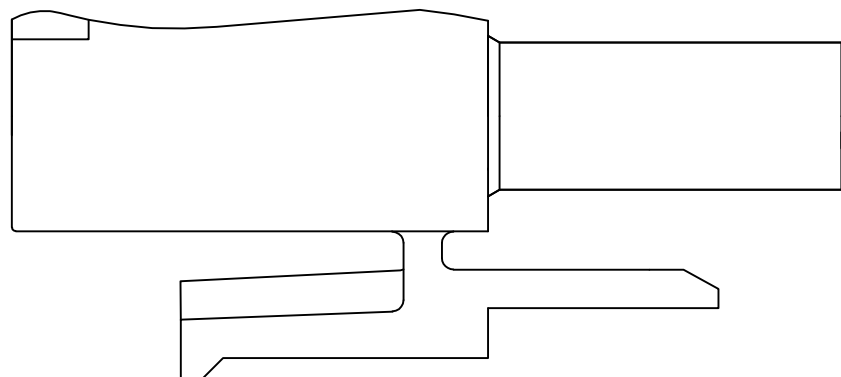


DETAIL B
350736-4 ONLY

- 1 MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - 2 SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - 3 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- △ 4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- △ 5 NOT MANUFACTURED IN U.S.
- △ 6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE ON EACH SIDE OF HOUSING.

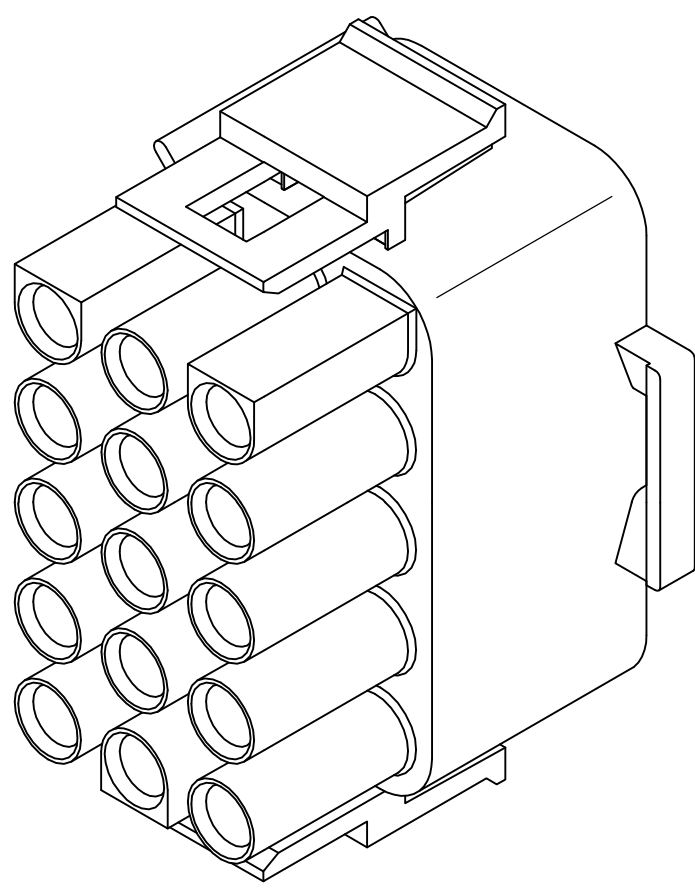

350736-4 3-DIMENSIONAL MODEL
NTS

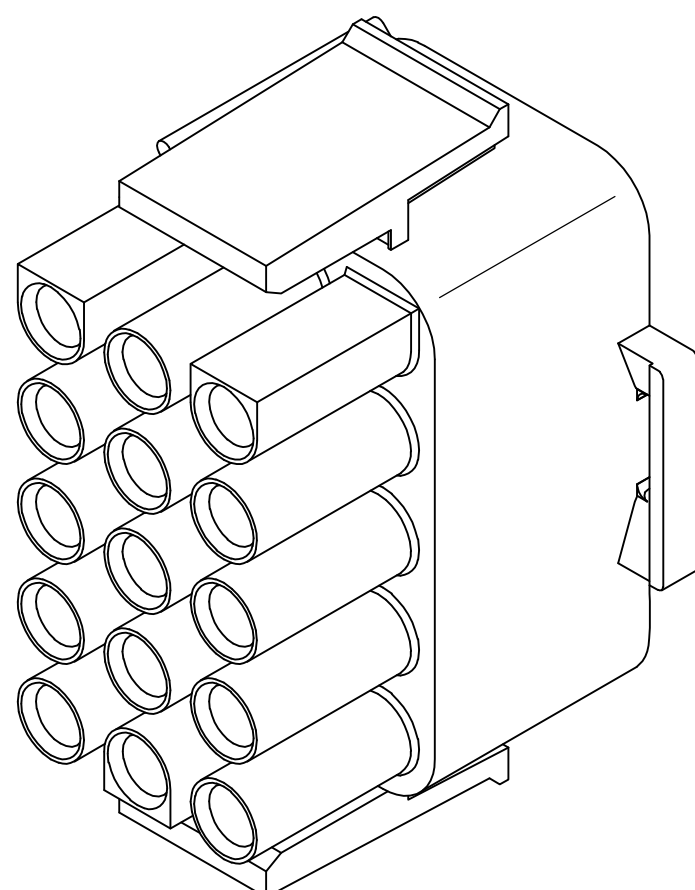

3-DIMENSIONAL MODEL
NTS

BLACK	1-350736-9
GRAY	1-350736-8
BLUE	1-350736-6
GREEN	1-350736-5
YELLOW	1-350736-4
ORANGE	1-350736-3
RED	1-350736-2
BROWN	1-350736-1
△ 350736-4	
NATURAL	350736-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 20FEB92	TE Connectivity	
DIMENSIONS: mm		CHK R. SWING 20FEB92	NAME PLUG, 15 CIRCUIT, UNIVERSAL MATE-N-LOK™	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± 0°30'		APVD D. SELF 24FEB92	APPLICATION SPEC	
MATERIAL NYLON, UL 94V-0		FINISH -	WEIGHT	
CUSTOMER DRAWING		SIZE A1	CAGE CODE 00779	DRAWING NO. 350736
SCALE 4:1		SHEET 1 OF 1		REV Y