

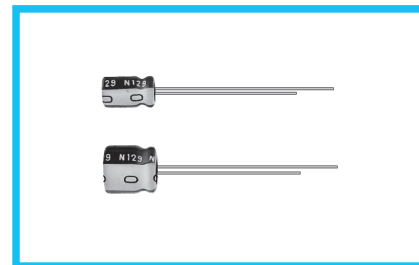
UST

7mmL, Wide Temperature Range

Anti-Solvent
Feature

- Wide temperature range of -55 to $+105^{\circ}\text{C}$, with 7mm height.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

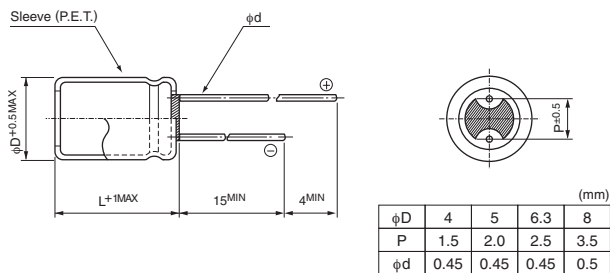
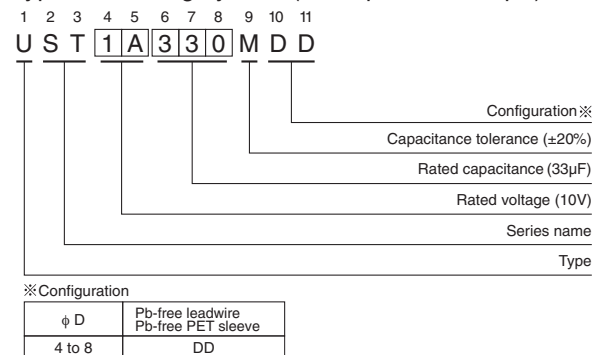
UST



■ Specifications

Item	Performance Characteristics						
Category Temperature Range	-55 to $+105^{\circ}\text{C}$						
Rated Voltage Range	6.3 to 50V						
Rated Capacitance Range	1 to 220 μF						
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C						
Leakage Current	After 2 minutes' application of rated voltage at 20°C , leakage current is not more than 0.01CV or $3(\mu\text{A})$, whichever is greater.						
Tangent of loss angle ($\tan \delta$)	Measurement frequency : 120Hz at 20°C						
	Rated voltage (V)	6.3	10	16	25	35	50
	$\tan \delta$ (MAX.)	0.24	0.21	0.18	0.15	0.13	0.12
Stability at Low Temperature	Measurement frequency : 120 Hz						
	Rated voltage (V)	6.3	10	16	25	35	50
	Impedance ratio (MAX.)	Z -25°C / Z $+20^{\circ}\text{C}$	3	2	2	2	2
		Z -40°C / Z $+20^{\circ}\text{C}$	6	5	4	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C .						
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C , they shall meet the specified values for the endurance characteristics listed above.						
Marking	Printed with white color letter on black sleeve.						

■ Radial Lead Type

Type numbering system (Example : 10V 33 μF)

■ Dimensions

		V		6.3	10	16	25	35	50
Cap. (μF)	Code	0J	1A	1C	1E	1V	1H		
1	010								4 × 7 10
2.2	2R2								4 × 7 19
3.3	3R3								4 × 7 24
4.7	4R7							4 × 7 24	5 × 7 29
10	100			4 × 7 29	5 × 7 33	5 × 7 36	6.3 × 7 44		
22	220	4 × 7 34	5 × 7 38	5 × 7 44	6.3 × 7 51	6.3 × 7 57	8 × 7 65		
33	330	5 × 7 42	5 × 7 47	6.3 × 7 57	6.3 × 7 63	8 × 7 72			
47	470	5 × 7 50	6.3 × 7 59	6.3 × 7 68	8 × 7 78				
100	101	6.3 × 7 77	8 × 7 96	8 × 7 107					
220	221	8 × 7 130	8 × 7 140						

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Rated ripple current (mA_{rms}) at 105°C 120Hz

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.