




XO HD4 TM

HD4 – Right Angle SI Connector

HD4TM high-density, signal-integrity connectors are used in right angle, PCB-mount applications where a female interface is required. HD4TM connectors allow for six 4x interfaces in the low-profile PCIe add-on card when used with part number V4001-06.

DIMENSIONS

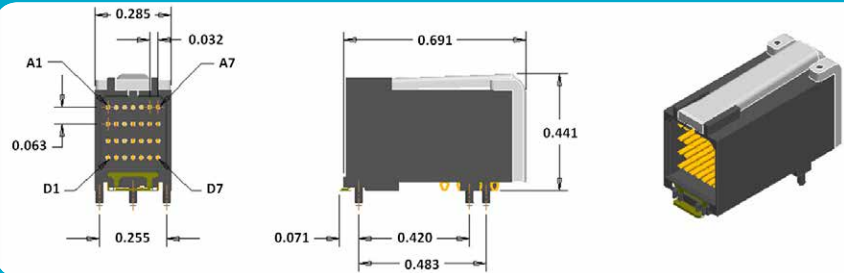

Sample Part Number Format: HD4-04-07-50-20-LP


HD4					
SERIES Right Angle SI Connector (Female)	ROWS 04 – 4 Rows	COLUMNS 07 – 7 Columns	CONTACT PLATING 30 – 30 μ " Au 50 – 50 μ " Au	TERMINATION 01 – Paste-in-hole 20 – Surface-mount	OPTIONS LP – Light pipe 00 – Without light pipe



PLEASE CONSULT THE AIRBORN WEBSITE FOR THE LATEST REVISION OF THIS DOCUMENT PRIOR TO BEGINNING ANY DESIGN WORK.

FEATURES

HD4TM connectors feature low mating force/high-reliability contact system with four points of contact.



MATERIALS and FINISHES

Socket Contact: BeCu per UNS C17460
Contact Finish: Localized gold finish per MIL-G-45204 over nickel per ASTM-B689 Type I
Molded Insulators: Glass-filled liquid crystal polymer (LCP) per ASTM-D5138

NOTE: AirBorn can manufacture other configurations to your exact specifications.

PERFORMANCE

Contact Rating 1 amperes maximum
Operating Temperature -55° to 125° C
Contact Wipe 1.5 mm (0.060")
Contact Normal Force 35-40 grams
Max Recommended Voltage 200 VDC
Insulation Resistance 1,000 megaohms @ 600 VDC
Durability 1000 connector mating cycles
Sinusoidal Vibration 15 g (EIA-364-28, condition IV)
Random Vibration TBD
Shock 100 g (EIA-364-27, condition G)

NOTE: Performance values are estimates at this time. Actual values will be determined when final product testing is complete.