


ROHS COMPLIANT

PRODUCT DATA DRAWING

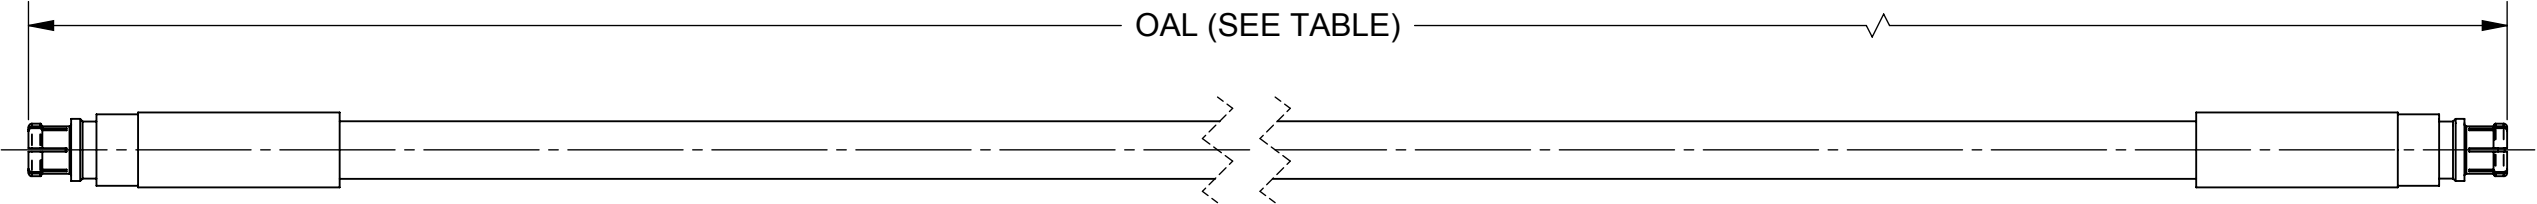

MATERIAL:

CONNECTIONS:

CABLE:

SHRINK TUBING:

PERFORMANCE:

IMPEDANCE:

FREQ. RANGE:

SEE NOTES

2X SMPM STRAIGHT FEMALE (3221-40006)

T-FLEX 405 (200-70-139)

M23053/5

50 OHMS

DC TO 40.0 GHz

SV P/N	L(OAL)
7032-7153	(6.000")
7032-7154	(12.000")
7032-7155	(24.000")

MATERIAL:

FINISH:

SURFACE AREA:

PROPRIETARY

SEE NOTES

SEE NOTES

N/A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.


DIMENSIONS ARE IN INCHES TOLERANCES:

FRACTIONAL: 1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

DRAWN:

CHECKED:

APPROVED:

VB 06/05/17

GPF 06/05/17

GPF 06/05/17

SV MICROWAVE

2400 Centrepark West Drive, Suite 100
West Palm Beach, FL 33409

TITLE:

SMPM FEMALE TO SMPM FEMALE FOR .085 CABLE ASSEMBLY

SIZE

CAGE CODE

DWG. NO.

B

95077

7032-7153-7154-7155

SCALE: 1:1

SHEET 1 OF 1