




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C I	Revised documentation ECR-09-002001	28JAN2009	AV	GT
	D	Changed spring design	04FEB2010	AV	GT
	E	UPDATED PART REVISION	24FEB2011	AV	GT
	F	REVISED PER ECR-17-004903	09MAY2017	SK	JL

D

D

C


C

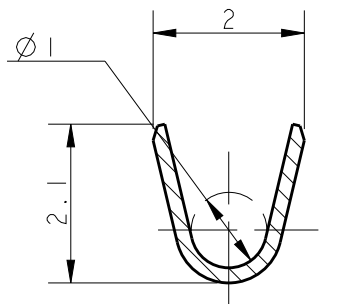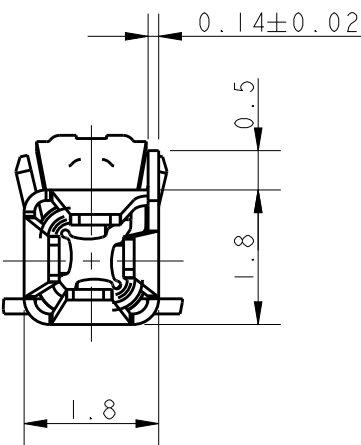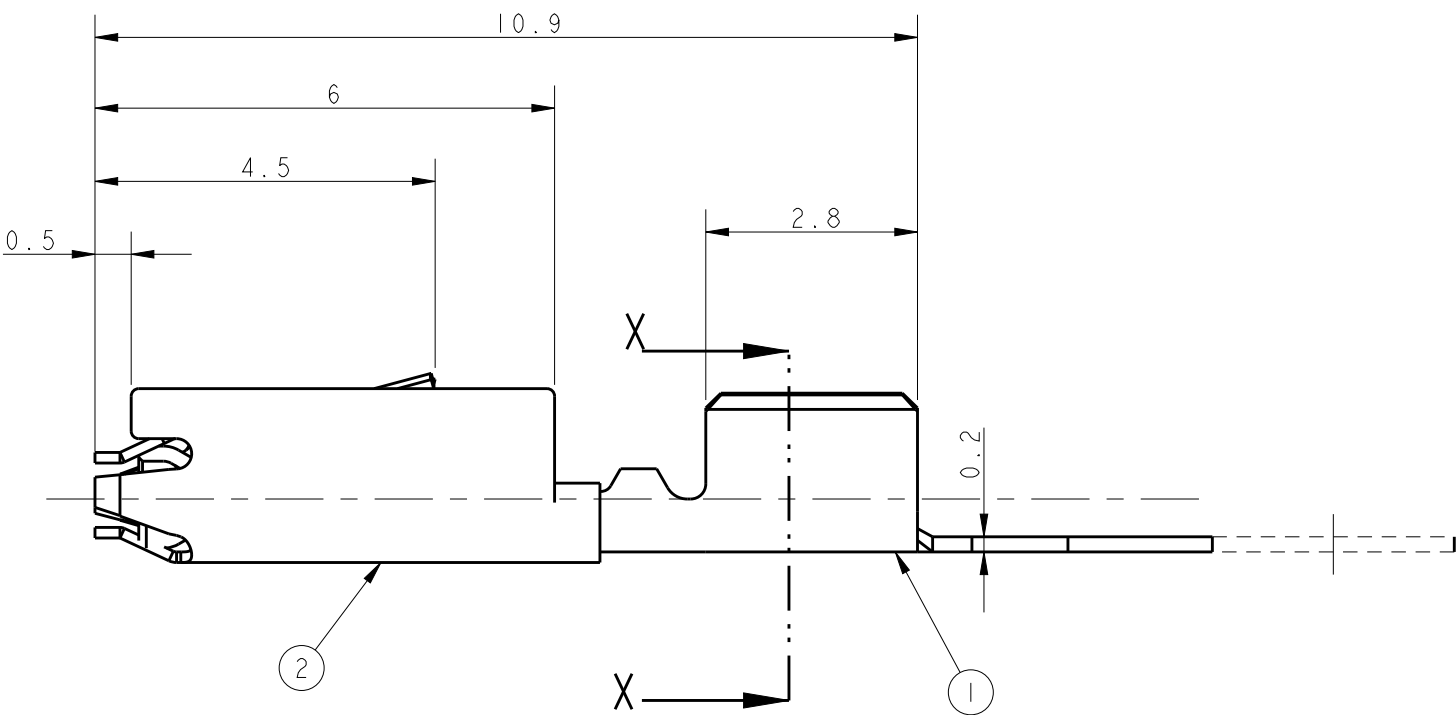

SECTION X - X


B

B

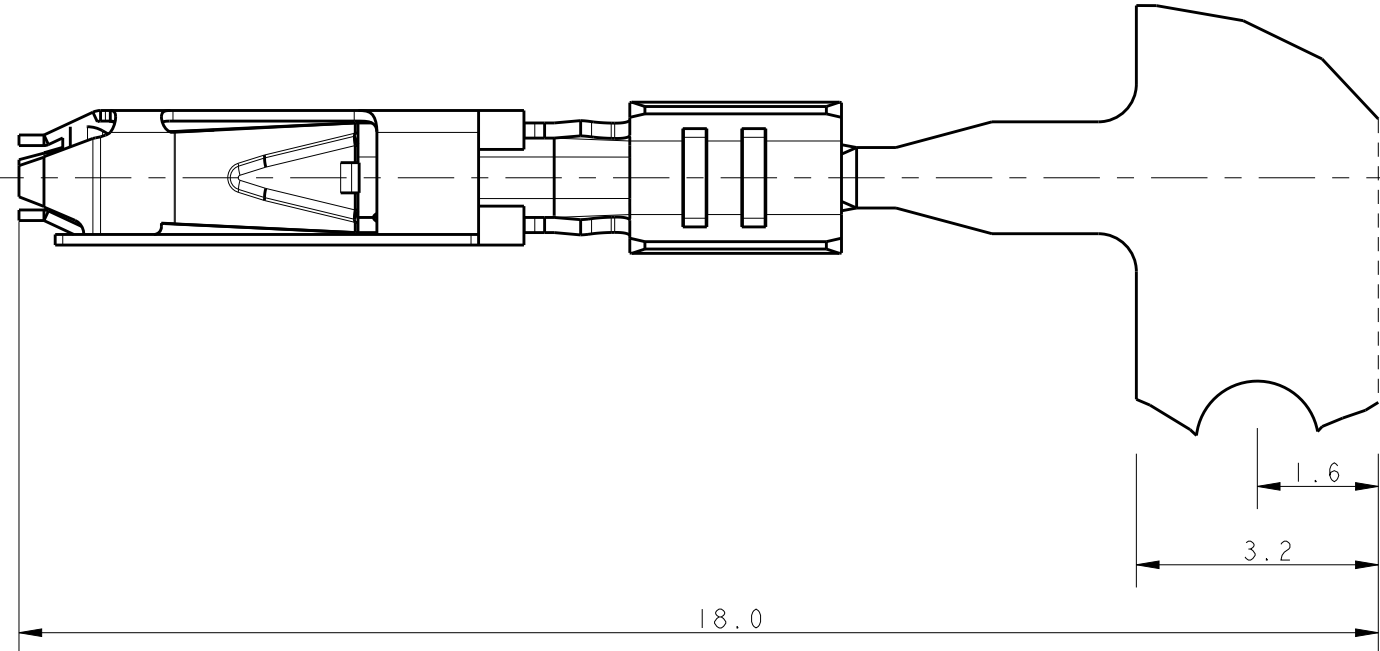

- Bemerkungen
NOTES
- 1. Passend zu Stiftkontakt siehe Zeichnung: AMP: 1740335
SUITABLE FOR PIN CONTACT SEE DRAWING:
 - 2. Kontakt geeignet für Drahtgroessenbereich 0.5...0.75mm²
CONTACT ACCEPTS WIRE-SIZE 0.5...0.75mm²
 - 3. Halbautomatisches Werkzeug und Handzange
(je für 2 crimps in einem Durchgang) verfügbar
SEMI-AUTOMATIC TOOL AND HANDTOOL
(EACH FOR 2 CRIMPS IN ONE CYCLE) AVAILABLE:
 - 4. Abmontellänge für crimp ist 3,5 mm
STRIPPED CABLE LENGHT FOR CRIMP IS 3.5mm
 - 5. Gewicht ca. 0,12g
WEIGHT ABOUT 0.12g
 - 6. Werkzeugvorschub 7,0 mm
DIE FEED 7,0 mm
 - 7. Aufgerollt auf Kartonspule
REELED ON PAPER-REEL

	1740336-8	1740336-7	E	2	SPRING	X10CrNi 18 8	
				1	BODY	CuNiSi	GOLD PLATED
	1740336-6	1740336-4	E	2	SPRING	X10CrNi 18 8	
				1	BODY	CuNiSi	TIN PLATED
	1740336-3	1740336-1	E	2	SPRING	X10CrNi 18 8	
				1	BODY	CuNiSi	BLANK
DIRECTION OFF TOP OF REEL	LOOSE PIECE	PART NO	REV	POS	DESCRIPTION	MATERIAL	FINISH OF CONTACT AREA

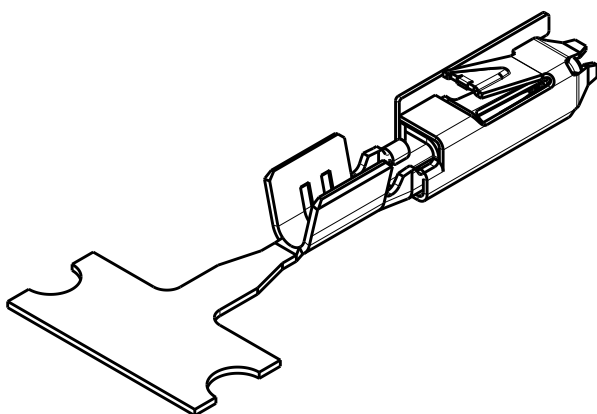

MASSSTAB 5:1

DIRECTION OFF TOP OF REEL

Fertig-zustand

9

M 1:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.2

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

MATERIAL SEE TABLE

SEE TABLE

DWN PRAVEEN 24 APR 06

CHK S. SKADE 24 APR 06

APVD T. GERLACH 24 APR 06

PRODUCT SPEC 108-94018

APPLICATION SPEC 114-18751

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME MICRO QUADLOK SYSTEM SOCKET CONTACT

SIZE A2

CAGE CODE 00779

DRAWING NO C-1740336

RESTRICTED TO -

SCALE 10:1

SHEET 1 OF 1

REV F