



SPECIFICATIONS

1. CASE:
18 GA. (.048) CRS, TIN PLATED
2. RATED CURRENT:
16A
3. RATED VOLTAGE:
250VAC, 50/60Hz
125VAC, 50-400Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.2KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
2.4mA @ 250VAC, 50Hz
6. WEIGHT: 12.8LB

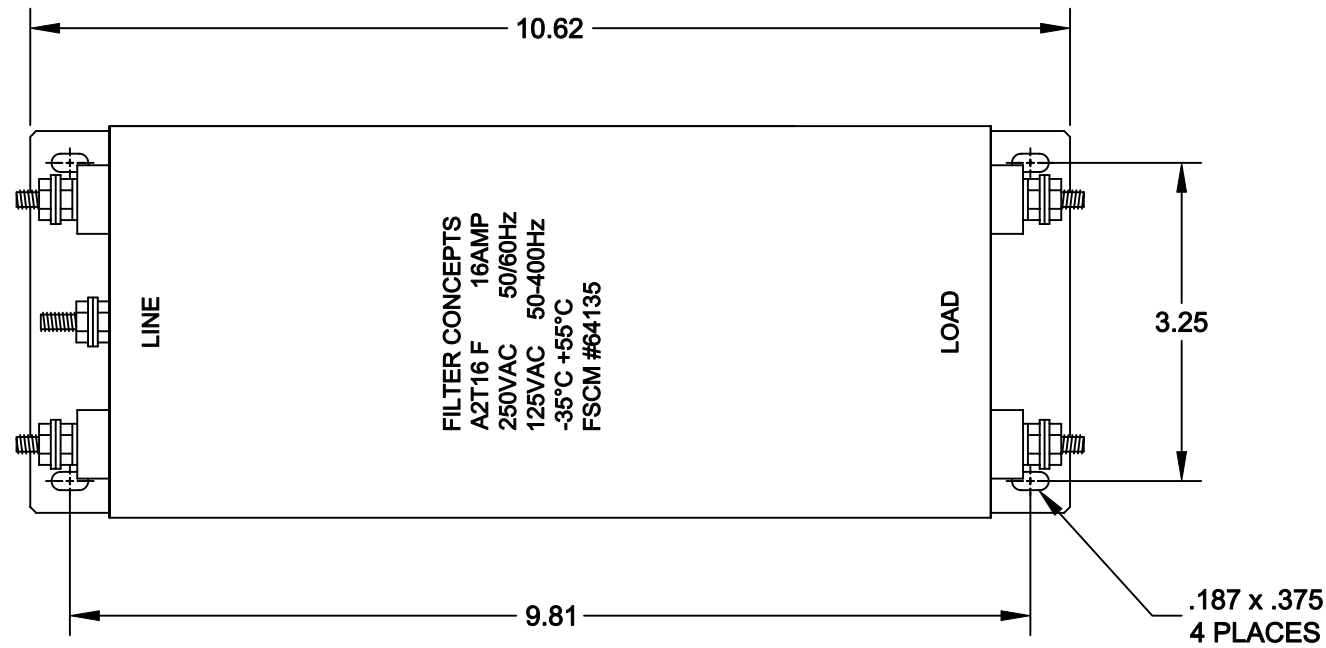


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06-26-02	LE
B	REVISED MARKING	06-24-03	LE
C	ADD WGT	07-09-10	LE

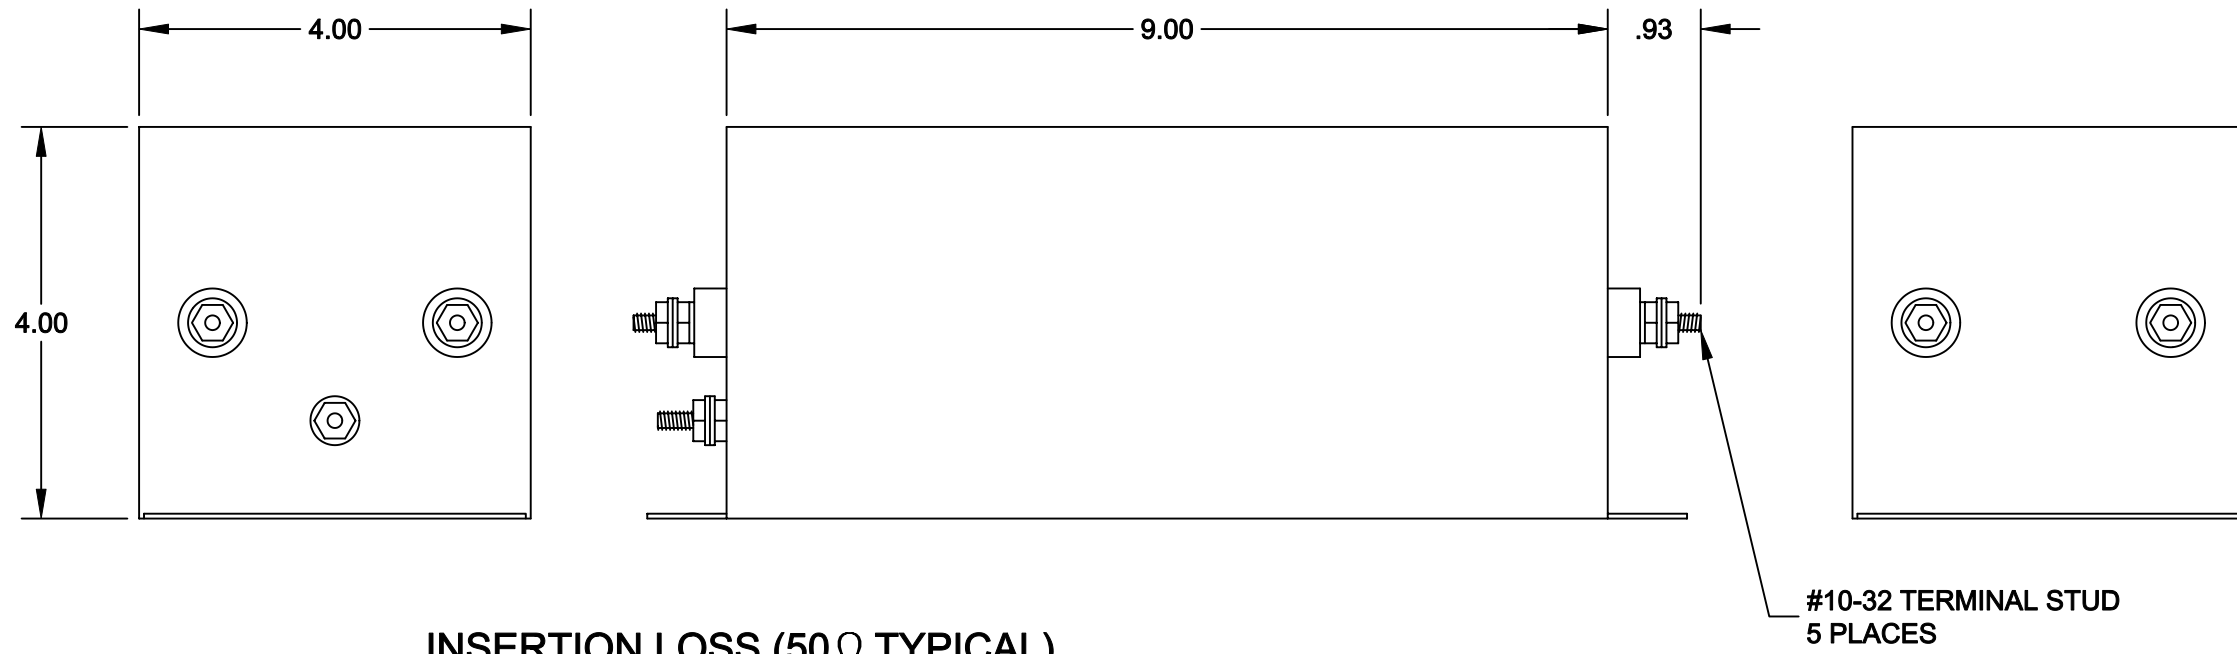

INSERTION LOSS (50Ω TYPICAL)

	.02 MHz	.05 MHz	.15 MHz	1.5 MHz	5.0 MHz	50 MHz
L/L	25 db	40 db	60 db	65 db	65 db	60 db
L/G	20 db	50 db	65 db	65 db	65 db	50 db

SCHEMATIC

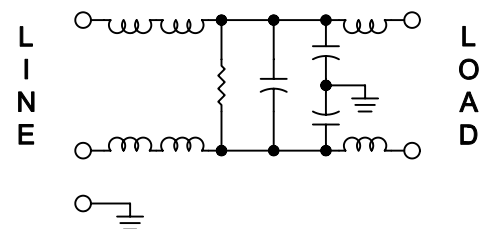

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
MATERIAL	DRAWN	GIANG TRINH 06-10-02
	CHECKED	DANNIEL VUONG 06-26-02
FINISH		

FILTER CONCEPTS INC.

APPLICATION DRAWING
A2T16 F FILTER

SIZE B	CODE IDENT NO.	DRAWING NO. 7322
SCALE 1/2	SHEET 1 OF 1	