
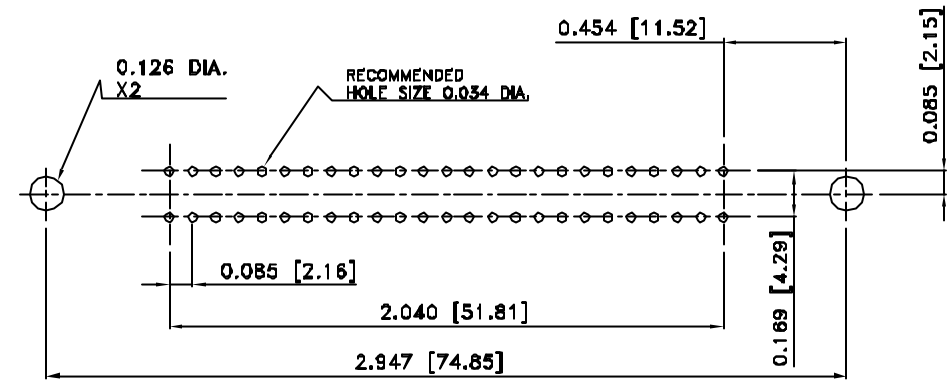


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A1	HK#	PRELIMINARY RELEASE	5/27/02	Y.M.LEE
B	HK3601	update for ROHS compliant	11/15/05	IP

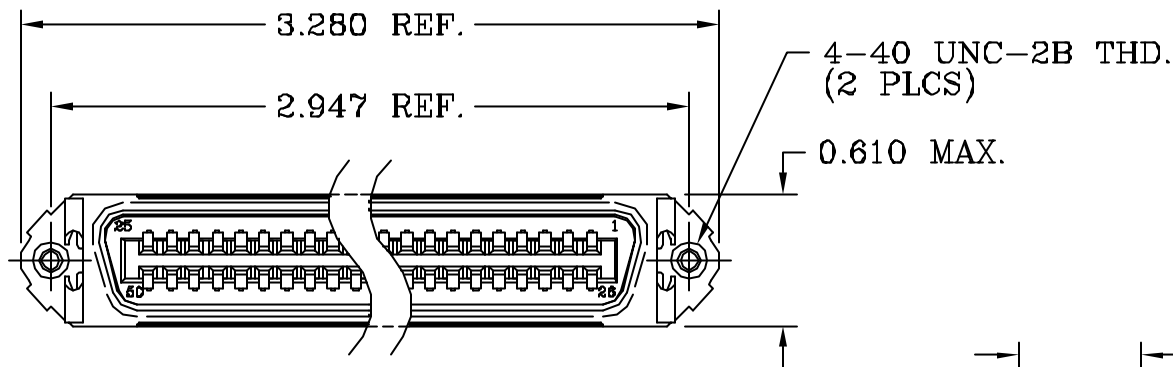

CONTACT HOLE SPACING FOR
PC BOARD - RECEPTACLE
PC BOARD THICKNESS: 0.060
- 0.120"



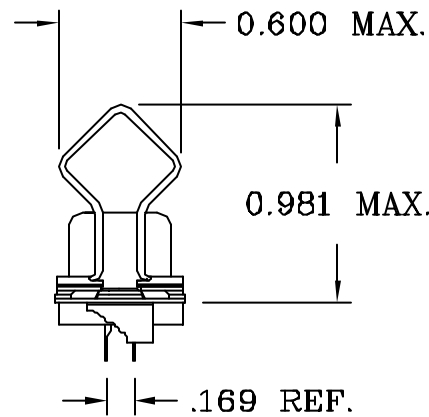


TABLE 1

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

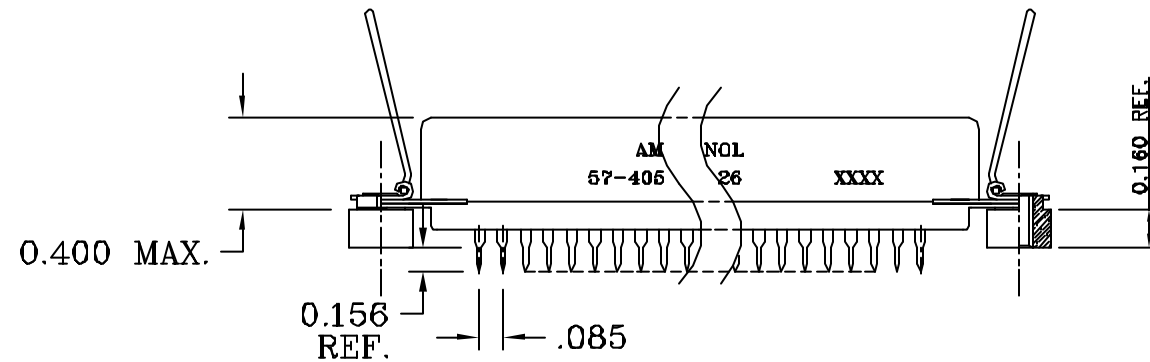


SPECIFICATIONS:

- 1) SOLDER PCB CONTACT: 0.156" [3.96] CONTACT TAIL LENGTH.
- 2) DIELECTRIC: DIALYL-PHTHALATE PER MIL-M-14F TYPE MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 20 MICRO-INCHES MIN. GOLD MATING AREA, GOLD FLASH ON TAIL.
50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: NICKEL PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

- 11) CONTACT RETENTION FORCE: 2 LBS MAX.
- 12) DURABILITY: 250 CYCLES MIN.
- 13) VIBRATION: NO INTERRUPTIONS < 1u SEC.
- 14) OPERATING TEMPERATURE: -55°C TO +105°C (-67°F TO +221°F)

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION		QTY REQ'D	
PARTS LIST					
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC X +/- .010 XX +/- .004 XXX +/- .002 FRACTIONS +/- ANGLES +/- 1° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS U.S. INCHES (METRIC) (MM)		APPROVAL	DATE	Amphenol	
		DRAWN XS.QUO	11/16/06		
		CHECKED			
		CHECKED			
		DRAWING FILE : /DRAWING/57/C574060026.DWG			
ANGLE OF PROJECTION		TITLE			
		50 CONTACT RECEPTACLE ASS'Y MINIATURE RIBBON, SPRING LATCH, .156" PC TAIL WITH METAL SPACER			
		SIZE	DRAWING NO.		REV.
		A3	C57-40500-26		B
		SCALE	NONE	SHEET 1 OF 1	