


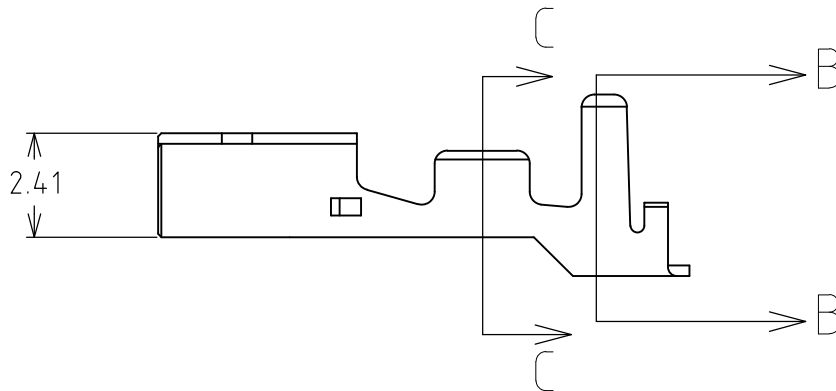

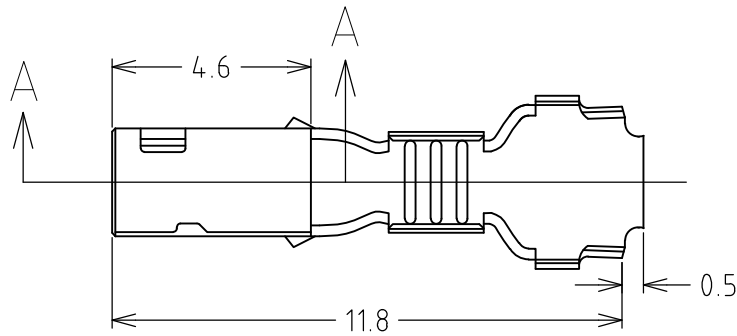


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED ECO-17-007276	24MAY'17	CX	DZ



SECT C-C

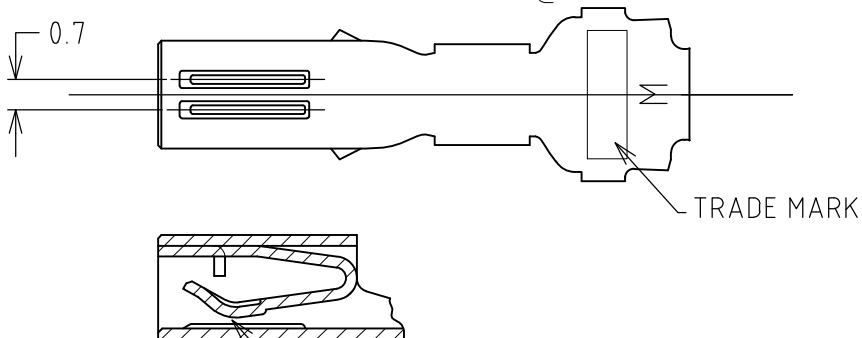

SECT B-B

SECT A-A

LUBRICANT AREA AND PERMISSIBLE
OUTSIDE THIS AREA ONLY FOR 1376348-2


AWG#24~#20 (0.22~0.53mmsq)	1.7~2.7	1376348-2
AWG#24~#20 (0.22~0.53mmsq)	1.7~2.7	1376348-1
WIER RANGE	INSULATION DIA	型番 PART NO.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT - TE Connectivity

DIMENSIONS: mm	DWN M.SUZUKI 16MAY2008	MATERIAL PRE-TIN COPPER ALLOY	FINISH TIN
	CHK S.MANABE 19MAY08	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLG ± 1 PLG ± 2 PLG ± 3 PLG ± ±0.25 4 PLG ± ANGLES ± 2DEG	APVD S.MANABE 19MAY08		
	PRODUCT SPEC 108-5699	NAME 5.0 POWER KEY CONNECTOR REC CONTACT (M)	
	APPLICATION SPEC 114-5292	SIZE A4	CAGE CODE 00779
	WEIGHT 0.000000	DRAWING NO C-1376348	RESTRICTED TO —
CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1
		REV B2	