


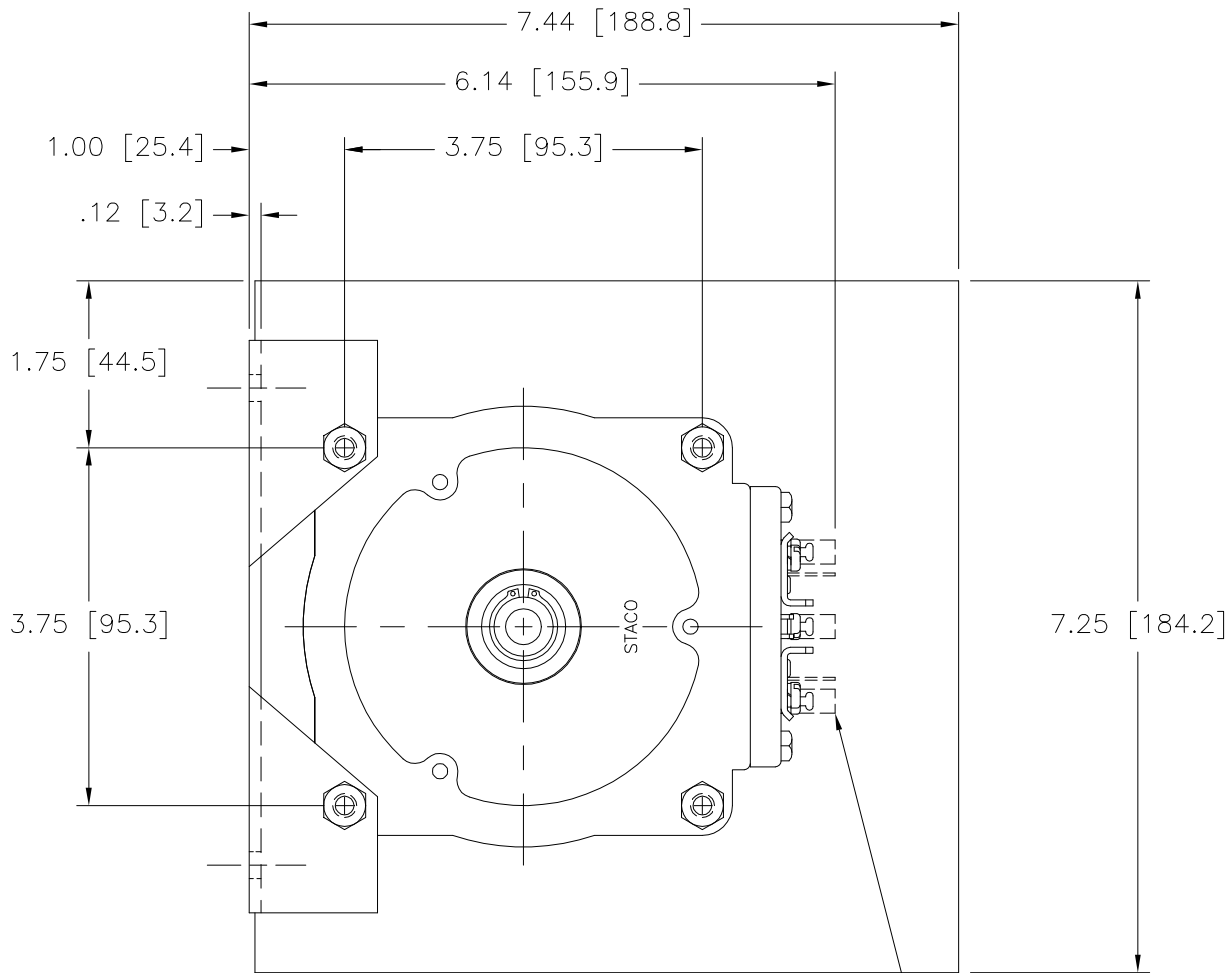


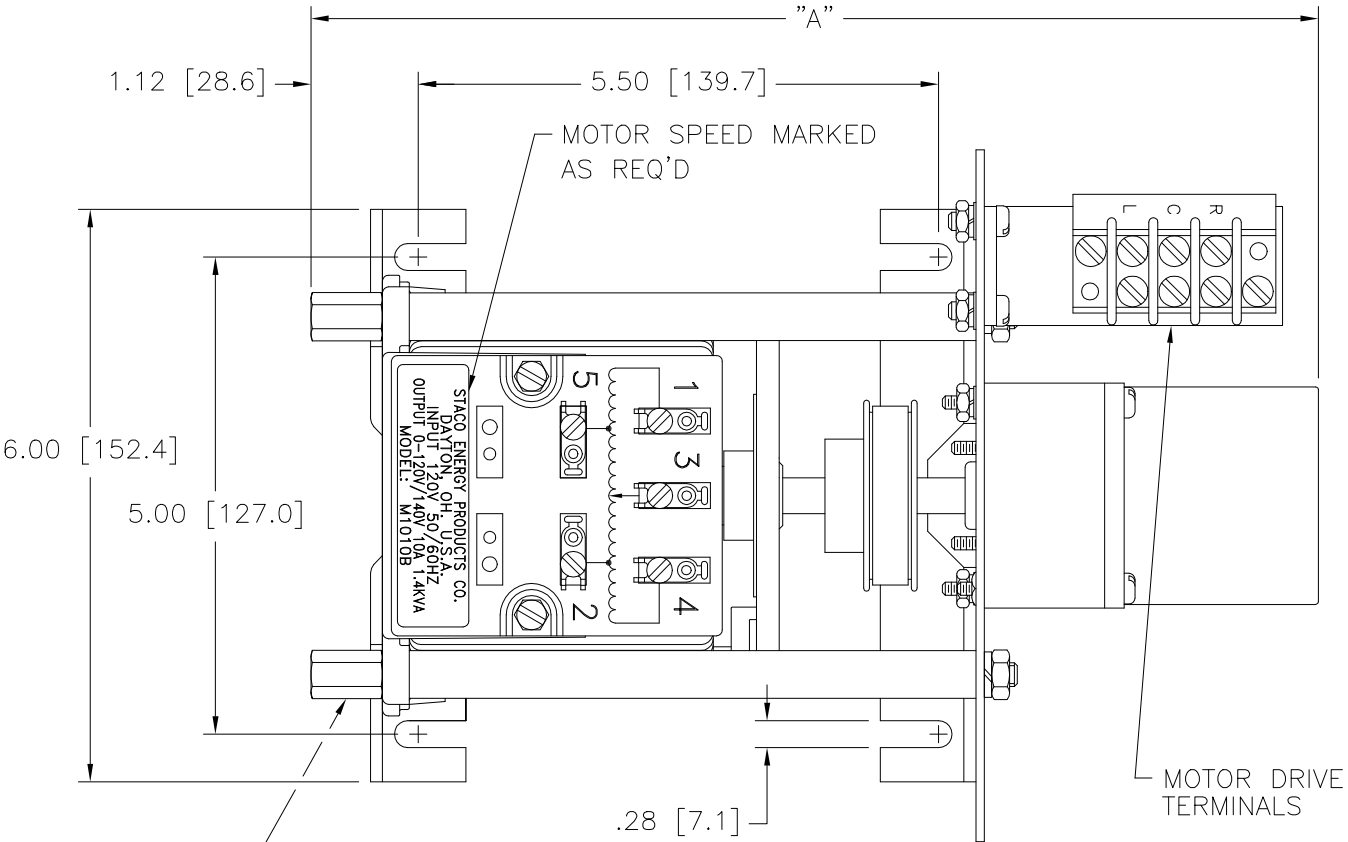

OPTIONAL TERMINALS
FOR PUSH ON OR
SOLDER CONNECTIONS
(.032 X .250) [0.8 X 6.4]

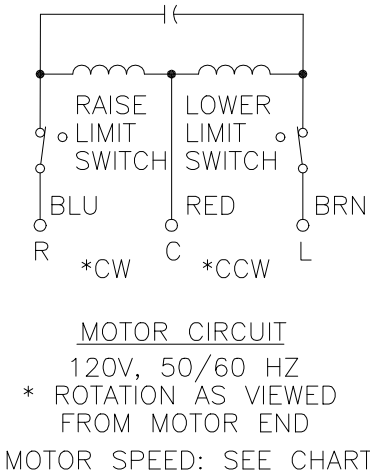

(4) STANDOFFS TAPPED
1/4-28 X .38 [9.5] DEEP
FOR MOUNTING BOLTS

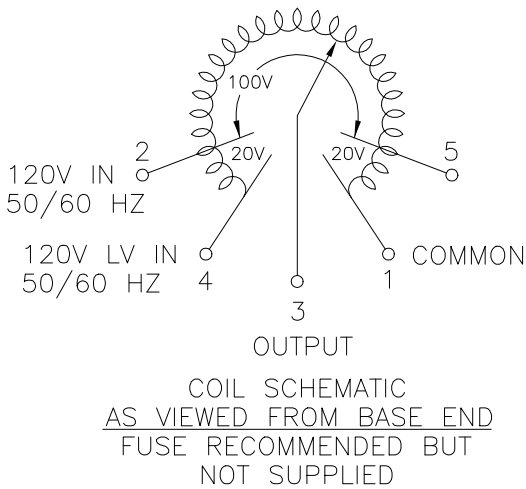

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM BASE END.

SPEED (SECONDS)	MODEL NUMBER	DIM "A"
5	5M1010B	10.56 [268.2]
15	15M1010B	10.56 [268.2]
30	30M1010B	10.95 [278.1]
60	60M1010B	10.95 [278.1]

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +			
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT
SINGLE PHASE	120	50/60	0-120	10	1.2	13	1.56	CW	1-4	—	4-3
			0-140	10	1.4	—	—	CCW	1-4	—	1-3
								CW	4-5	—	4-3
								CCW	2-1	—	1-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX, .XXX, .005 HOLES .002 ANGLES 1° DRAFT 1-1/2° UNITS IN [mm]			TITLE: SPEC. CONTROL DRAWING MOTORIZED VARIABLE XFMR MODEL: M1010B								
MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING											
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.											
DRAWN BY S.A. SMITH			DATE 9/18/97		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE
CHECKER			DATE		WEIGHT APPROX. 16.75		CODE IDENT. NO. 83008		DWG. SIZE		DWG. NO.
ENGINEER			DATE		SCALE 1 = 1		SHEET 1 OF 1		D		031-1710

