


# STANDARD INSULATING BUSHINGS

561-MP2502, 561-MP3753, 561-MP3754, 561-MP4374, 561-MP4375,  
561-MP5004, 561-MP5005, 561-MP5006

Date Last Revised: 7/1/13

DIMENSIONS: in

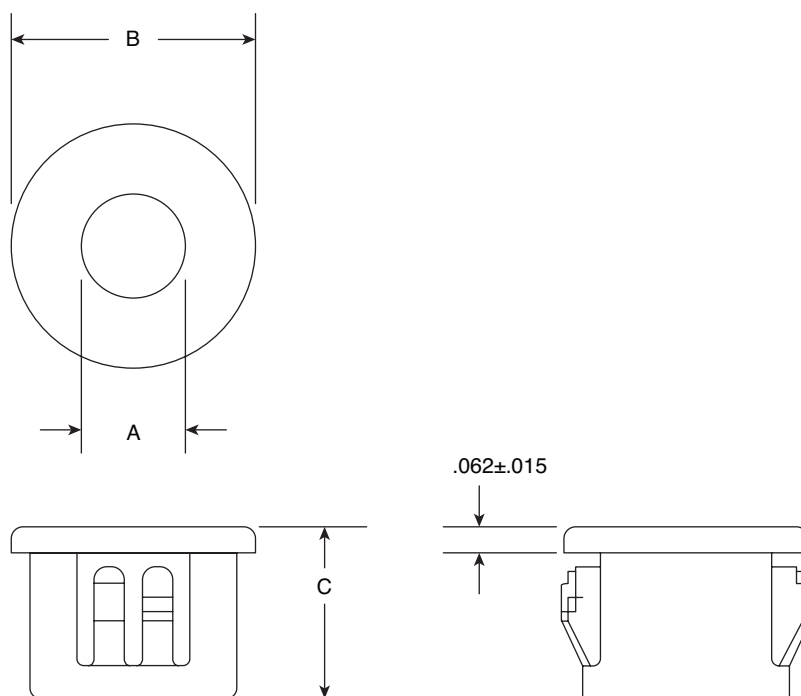

Standard bushings are designed with multiple locks to positively snap in panels ranging from 1/32" to 1/8" thickness. Molded in heat stabilized Nylon UL94V2 black.

| Part Number | Description | Inside Dia. A | Head Dia. B  | Thickness C  | Hole Dia. | Max. Thickness |
|-------------|-------------|---------------|--------------|--------------|-----------|----------------|
| 561-MP2502  | MP 2502     | .125 (+.015)  | .312 (±.015) | .312 (±.015) | .250      | .062           |
| 561-MP3753  | MP 3753     | .187 (+.015)  | .468 (±.015) | .406 (±.015) | .375      | .125           |
| 561-MP3754  | MP 3754     | .250 (+.015)  | .468 (±.015) | .406 (±.015) | .375      | .125           |
| 561-MP4374  | MP 4374     | .250 (+.015)  | .531 (±.015) | .406 (±.015) | .437      | .125           |
| 561-MP4375  | MP 4375     | .312 (+.015)  | .531 (±.015) | .406 (±.015) | .437      | .125           |
| 561-MP5004  | MP 5004     | .250 (+.015)  | .578 (±.015) | .406 (±.015) | .500      | .125           |
| 561-MP5005  | MP 5005     | .312 (+.015)  | .578 (±.015) | .406 (±.015) | .500      | .125           |
| 561-MP5006  | MP 5006     | .375 (+.015)  | .578 (±.015) | .406 (±.015) | .500      | .125           |

RoHS Compliant

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

EPD-200920

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.