

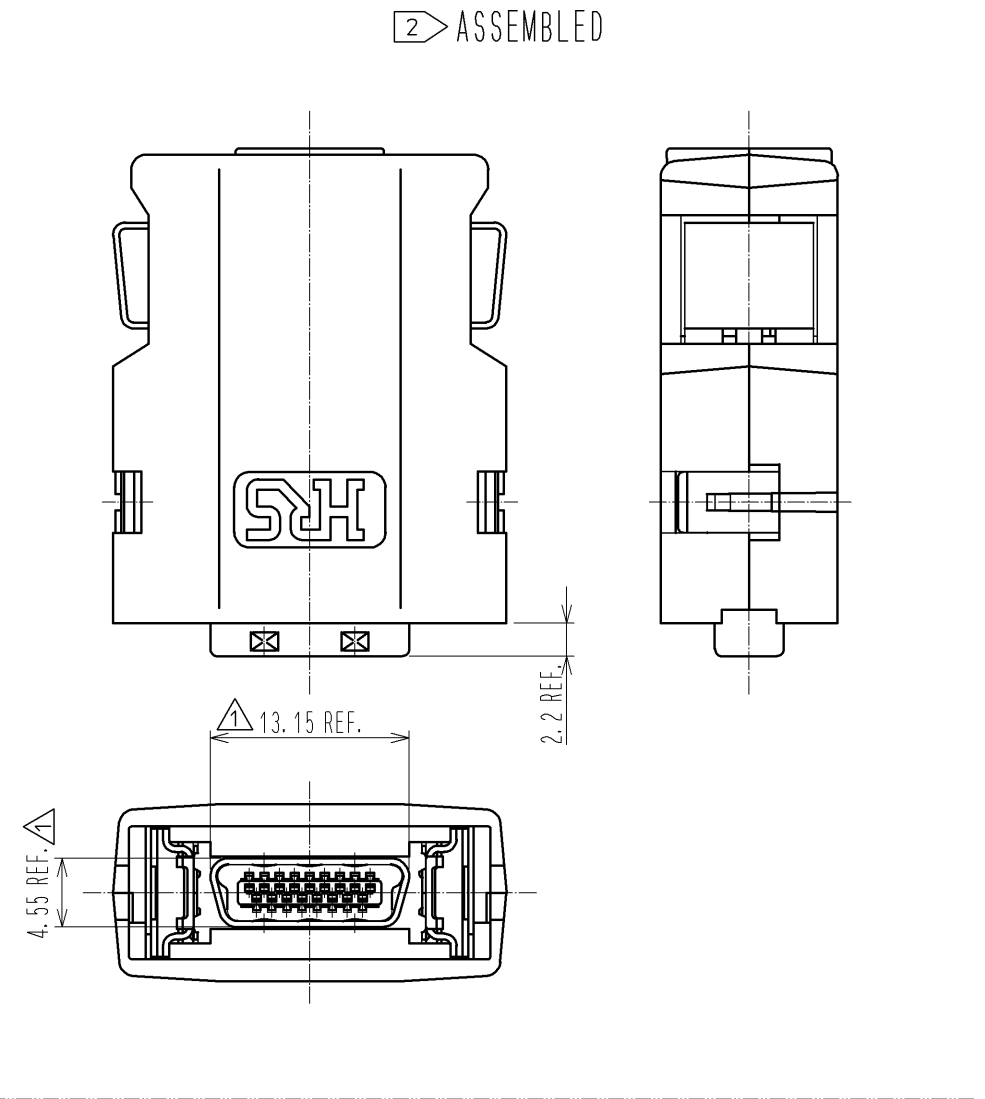
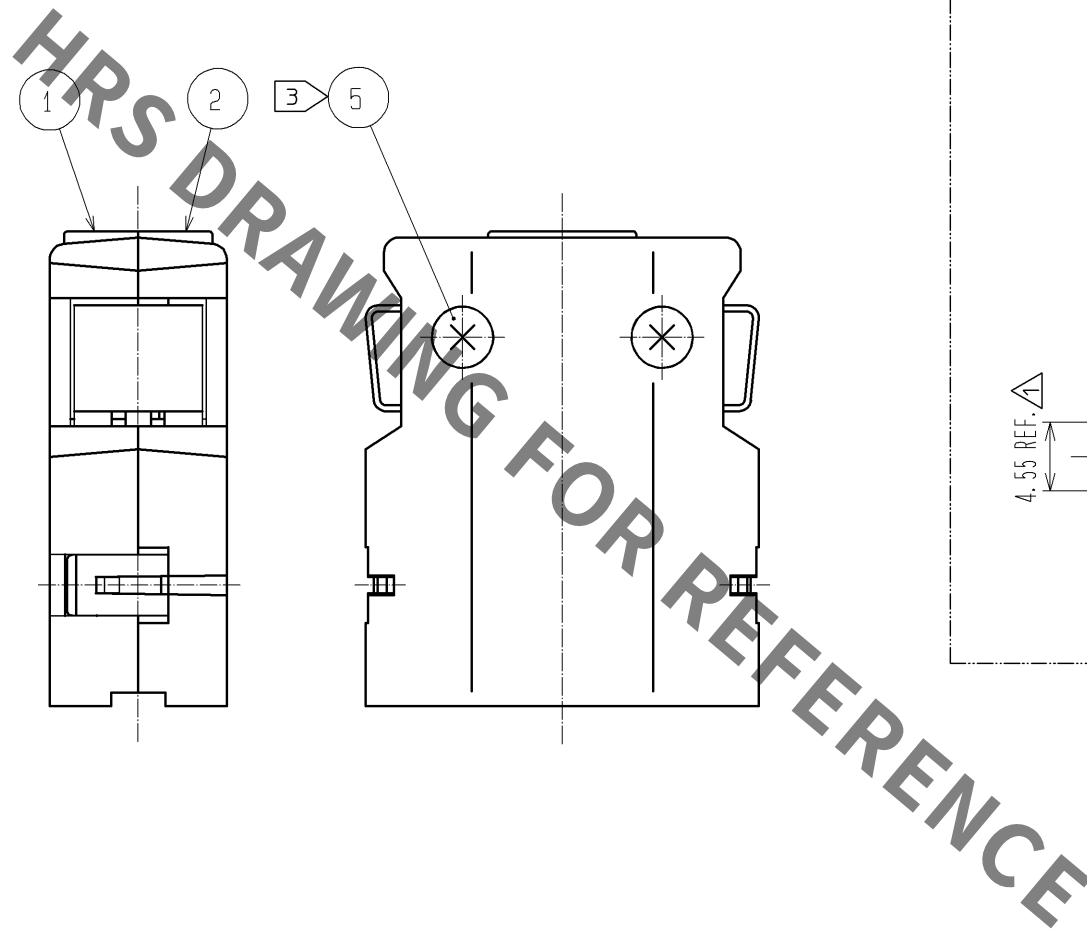
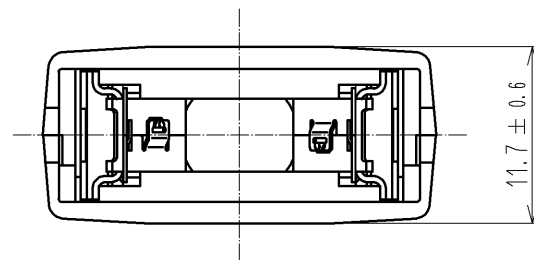
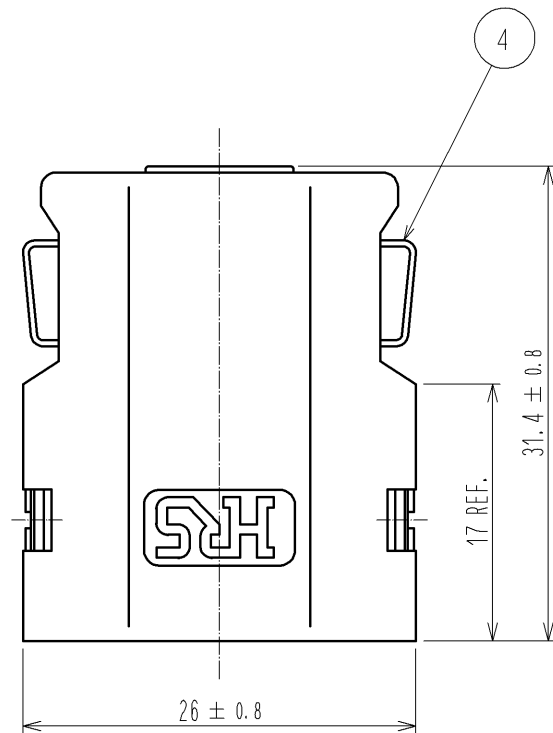
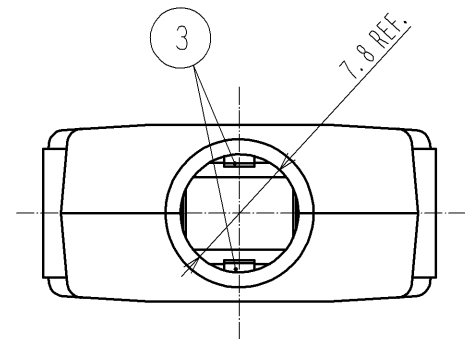




- NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3+B-17S'.
A CLAMP 'DH-17-CMB(6.3)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

2		PC	UL94V-0 BLACK	5	STEEL	TRIVALENT BLACK CHROMATE					
1				4	STAINLESS STEEL						
				3	STAINLESS STEEL	PLATING : NICKEL 0.1μm MIN.					
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm				SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-E-003061		DESIGNED TM. ONO	CHECKED KN. ICHIKAWA	DATE 09.12.14
 HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI		09.04.22		DRAWING NO. EDC3-126852-00					
		CHECKED : KN. ICHIKAWA		09.04.22		PART NO. DH-17-CT1B					
		DESIGNED : M0. SHIMOYAMA		09.04.21		CODE NO. CL244-0039-7-00					
		DRAWN : M0. SHIMOYAMA		09.04.21							
											

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

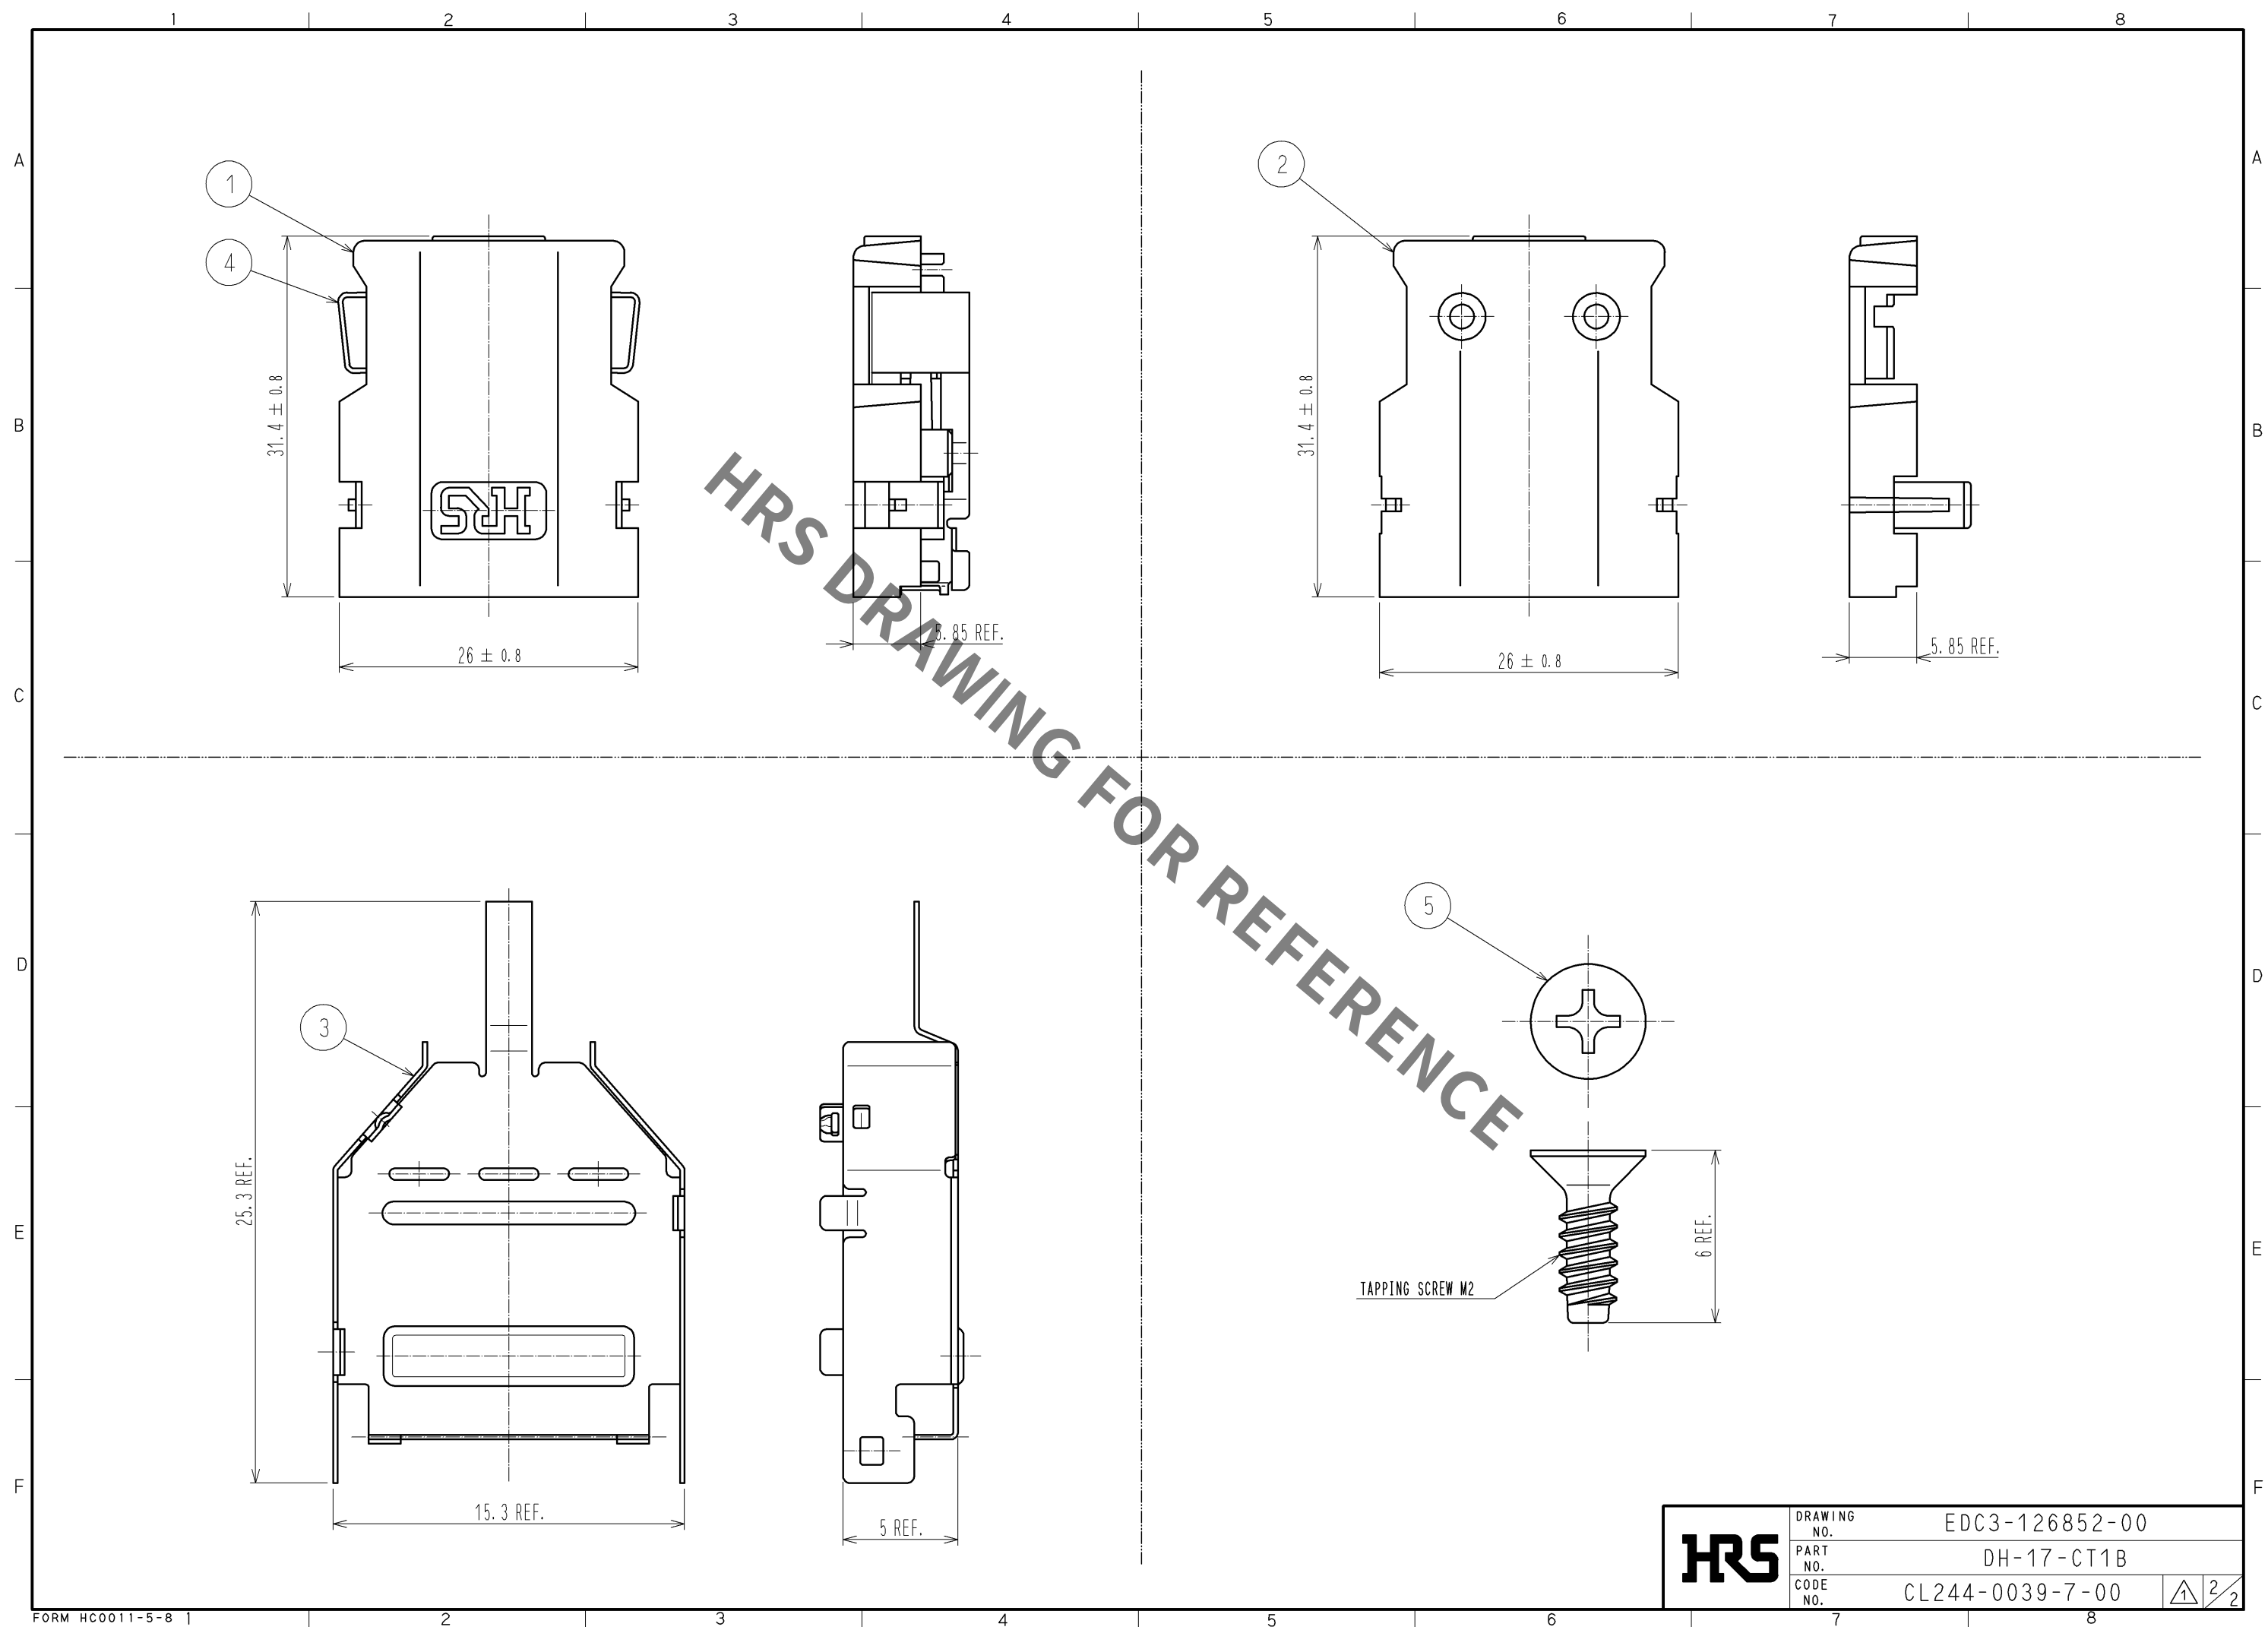

HRS	DRAWING NO.	EDC3-126852-00	2/2
	PART NO.	DH-17-CT1B	
	CODE NO.	CL244-0039-7-00	