
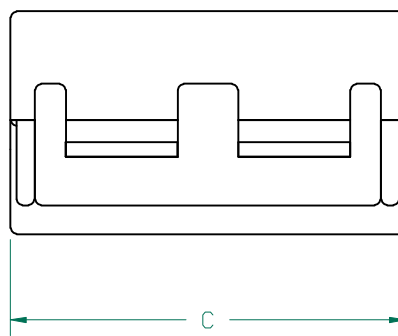


CORE DIMENSIONS:

A	18.66 [.735]	±	0.38 [.015]
B	10.16 [.400]	±	0.20 [.008]
C	28.96 [1.140]	±	0.51 [.020]
D	9.40 [.370]	±	0.19 [.007]

**UNCONTROLLED
DOCUMENT**

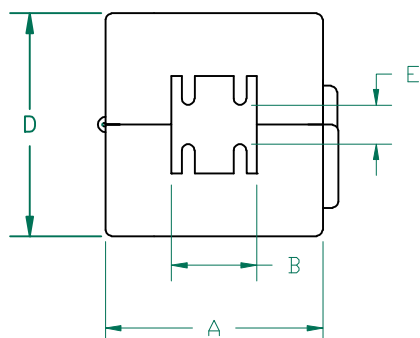


CASE DIMENSIONS:

A	22.28 [.877]	±	Ref.
B	10.00 [.394]	±	Ref.
C	32.77 [1.290]	±	Ref.
D	21.84 [.860]	±	Ref.
E	4.30 [.170]	±	Ref.

IMPEDANCE (Z)

Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	250 Ω	420 Ω
Minimum	- Ω	200 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

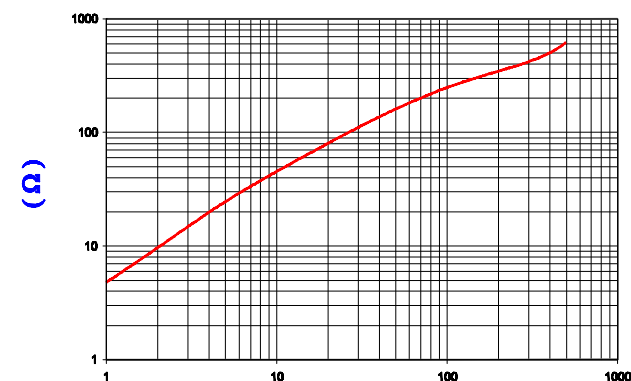

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16082A-Test Fixture, REF #3399

NOTES:

1. ASSEMBLED PART #: 28A2029-0A0
2. CASE COLOR: WHITE - "0A0"
3. CASE FLAMMABILITY RATING: UL94 V-2.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
V	UPDATE LOGO AND ADD NOTES 3	12/16/11	Jcai				
U	UPDATE 100MHz MINIMUM VALUE	07/17/07	TMB				
T	UPDATE COMPANY LOGO	04/18/07	TMB				
S	UPDATE CASE DIMENSIONS A, C, & D CHANGE CASE DIM TOLERANCES TO REF	10/30/06	TMB				
R	CHANGE CASE "B" DIM TO 10.00 [.394] & TOLERANCE TO 0.51 [.020]	07/07/06	TMB				
Q	REMOVE NOTES 1, 3, 4, & 5 REMOVE CORE & CASE P/Ns REV CASE DIMS & TOLERANCES ADD DIM E TO CASE	05/15/06	TMB				
REV	DESCRIPTION	DATE	INT	PROJECT/PART NUMBER: 28A2029-0A0			
				DATE: 01/16/02	SCALE: NTS	MATERIAL: Ferrite	
				CAD # 28A2029-0A0-V	TOOL # -		

Laird
TECHNOLOGIES

REV **V** PART TYPE: **FERRITE SNAP-ON** DRAWN BY: **JAZ**