



Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M23, 19 pins
Collar material	Metal
Status LED	Without
Cable connection	Solder terminal / wire size $\leq 1 \text{ mm}^2$ / clamping capacity 0.35...0.47 in (9...12 mm)

Complementary

Cable gland type	Pg 13.5
Cable connector fixing	Screw-on
System Voltage	60 V AC 75 V DC
Line Rated Current	7.5 A
Enclosure material	Metal
Insulating resistance	$> 10000000 \text{ G}\Omega$
Contact resistance	$\leq 5000 \mu\text{Ohm}$
Product weight	0.18 lb(US) (0.08 kg)


Environment

IP degree of protection	IP65
ambient air temperature for operation	-13...230 °F (-25...110 °C)

Offer Sustainability

Not Green Premium product	Not Green Premium product
Will be Compliant on 4Q2013	Will be Compliant on 4Q2013 Will be Compliant on 4Q2013
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.	Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Dimensions

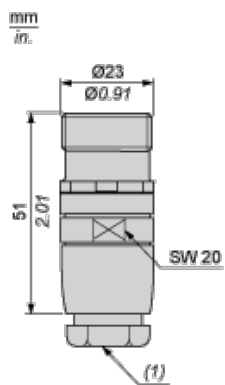

(1) Cable gland: no. 13 metal (Pg 13.5)

Connections and Schemes

