



# SAW Components

Data Sheet B4166

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

# SAW Components

B4166

## Low-Loss Filter for Mobile Communication

1842,50 MHz

### Data Sheet




Ceramic package **DCC6C**

#### Features

- Low-loss RF filter for mobile telephone PCN system, receive path
- High selectivity
- Usable passband: 75 MHz
- No matching network required for operation at 50  $\Omega$
- Ceramic Package for **Surface Mounted Technology (SMT)**

#### Terminals


- Ni, gold-plated

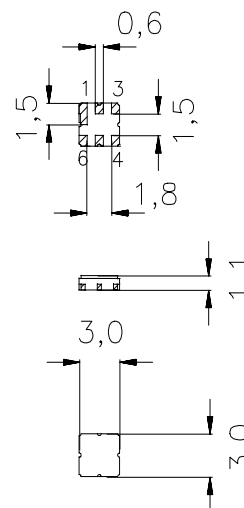

Dimensions in mm, approx. weight 0,037

#### Pin configuration

- |            |                |
|------------|----------------|
| 2          | Input          |
| 5          | Output         |
| 1, 3, 4, 6 | To be grounded |

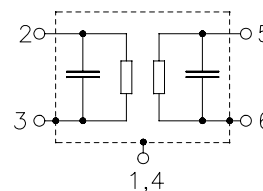

Type	Ordering code	Marking and Package according to	Packing according to
B4166	B39182-B4166-U410	C61157-A7-A67	F61074-V8088-Z000

**Electrostatic Sensitive Device (ESD)**

#### Maximum ratings

Operable temperature range	$T$	- 40/+ 85	$^{\circ}\text{C}$	peak power of GSM signal, duty cycle 4:8
Storage temperature range	$T_{\text{stg}}$	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	$V_{\text{DC}}$	5	V	
Input power at				
GSM850, GSM900	$P_{\text{IN}}$	15	dBm	peak power of GSM signal, duty cycle 4:8
GSM1800, GSM1900	$P_{\text{IN}}$	12	dBm	
Tx bands				

**SAW Components**
**B4166**
**Low-Loss Filter for Mobile Communication**
**1842,50 MHz**
**Data Sheet**

**Characteristics**

Operating temperature range:  $T = 25 \pm 2^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$					
	1805,0 ... 1880,0	MHz	—	2,9	3,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$					
	1805,0 ... 1880,0	MHz	—	0,9	1,3	dB
<b>Input VSWR</b>						
	1805,0 ... 1880,0	MHz	—	2,0	2,2	
<b>Output VSWR</b>						
	1805,0 ... 1880,0	MHz	—	2,2	2,4	
<b>Attenuation</b>	$\alpha$					
	10,0 ... 370,0	MHz	40,0	43,5	—	dB
	370,0 ... 1300,0	MHz	37,0	38,5	—	dB
	1300,0 ... 1705,0	MHz	30,0	36,0	—	dB
	1705,0 ... 1785,0	MHz	12,0	14,0	—	dB
	1920,0 ... 1980,0	MHz	12,0	25,0	—	dB
	1980,0 ... 2530,0	MHz	23,0	28,0	—	dB
	2530,0 ... 2680,0	MHz	31,0	35,0	—	dB
	2680,0 ... 3400,0	MHz	28,0	34,0	—	dB
	3400,0 ... 3975,0	MHz	24,0	30,0	—	dB
	3975,0 ... 4200,0	MHz	23,0	27,0	—	dB
	4200,0 ... 4920,0	MHz	15,0	19,0	—	dB
	4920,0 ... 5200,0	MHz	10,0	17,0	—	dB
	5200,0 ... 6000,0	MHz	5,0	11,0	—	dB



**SAW Components**
**B4166**
**Low-Loss Filter for Mobile Communication**
**1842,50 MHz**
**Data Sheet**

**Characteristics**

Operating temperature range:  $T = -40$  to  $+85^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	1842,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$					
	1805,0 ... 1880,0	MHz	—	3,2	4,5	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$					
	1805,0 ... 1880,0	MHz	—	1,2	2,5	dB
<b>Input VSWR</b>						
	1805,0 ... 1880,0	MHz	—	2,1	2,5	
<b>Output VSWR</b>						
	1805,0 ... 1880,0	MHz	—	2,3	2,7	
<b>Attenuation</b>	$\alpha$					
	10,0 ... 370,0	MHz	40,0	43,5	—	dB
	370,0 ... 1300,0	MHz	37,0	38,5	—	dB
	1300,0 ... 1705,0	MHz	30,0	36,0	—	dB
	1705,0 ... 1785,0	MHz	9,0	13,0	—	dB
	1920,0 ... 1980,0	MHz	10,0	25,0	—	dB
	1980,0 ... 2530,0	MHz	23,0	28,0	—	dB
	2530,0 ... 2680,0	MHz	31,0	35,0	—	dB
	2680,0 ... 3400,0	MHz	28,0	34,0	—	dB
	3400,0 ... 3975,0	MHz	24,0	30,0	—	dB
	3975,0 ... 4200,0	MHz	23,0	27,0	—	dB
	4200,0 ... 4920,0	MHz	15,0	19,0	—	dB
	4920,0 ... 5200,0	MHz	10,0	17,0	—	dB
	5200,0 ... 6000,0	MHz	5,0	11,0	—	dB

**SAW Components**
**B4166**
**Low-Loss Filter for Mobile Communication**
**1842,50 MHz**
**Data Sheet**

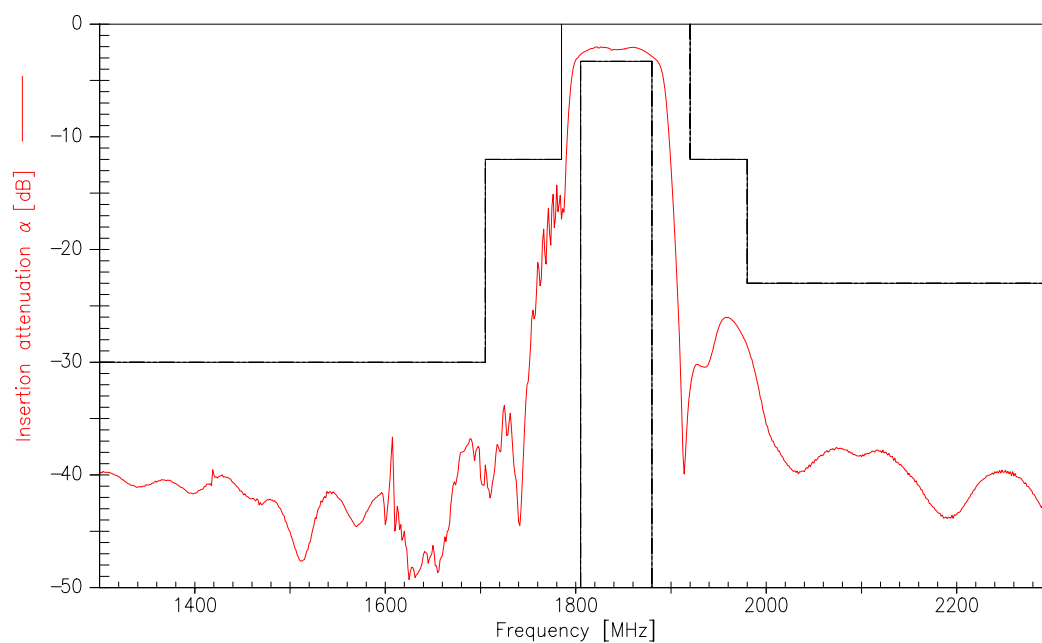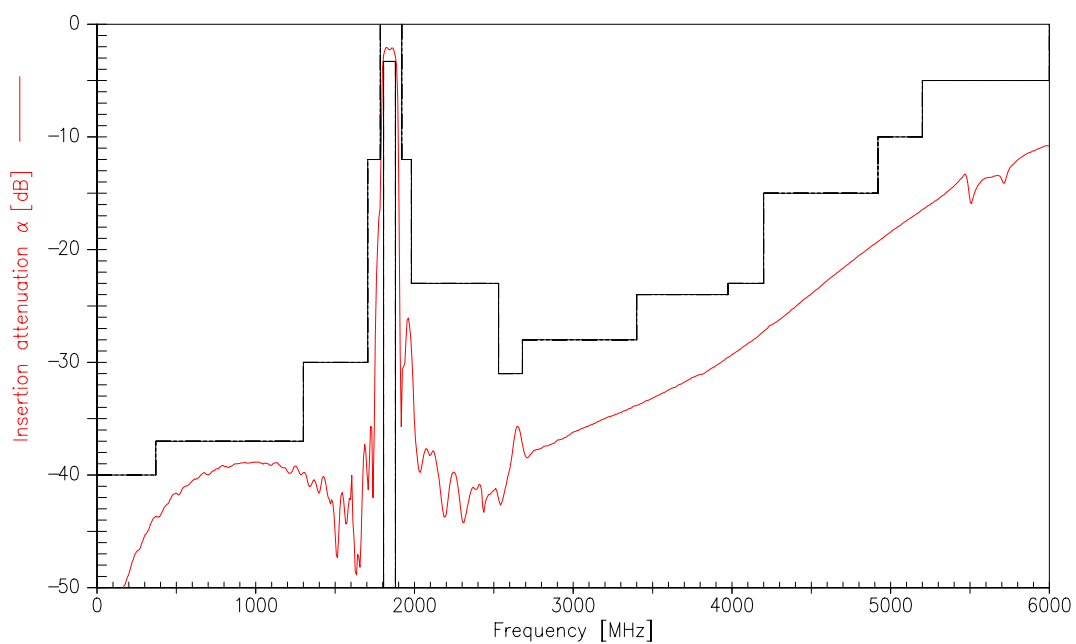**Transfer function (spec for 25°C)**

**Transfer function (wideband)**


**Published by EPCOS AG****Surface Acoustic Wave Components Division, OFW E MF****P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2009. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EPCOS / TDK:](#)

[B39182B4166U410](#)