

13

12

11

10

9

8

7

6


5

4


3

2


1




SECTION C-C



SECTION B-B



SECTION A-A



NOTES:


1. MATERIAL: 260 BRASS .008 THK
2. TERMINAL 4706-(***)* ACCEPTS 16 TO 18 AWG WIRE WITH INSULATION DIA OF .120 MAX
3. TERMINALS CONFORM TO SOLDERABILITY SPEC 152
4. PRODUCT SPECIFICATION: PS-4706-001

4706-*(***)*
 BLANK=SEE SHT 1
 3=SEE SHEET 2
 FORM
 BLANK=CHAIN
 L=LOOSE



PLATING PER SDES-88

*(P909) OVERALL HOT TIN DIP: 2.54 MICROMETERS MIN



*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO
 RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE
 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT
 WITH TIN-LEAD PLATING.

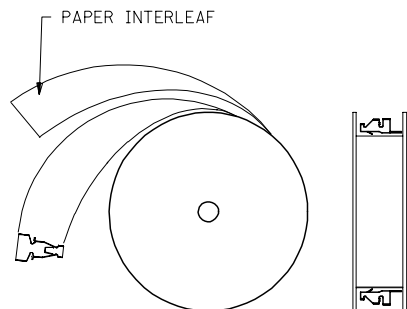

WINDING SPEC

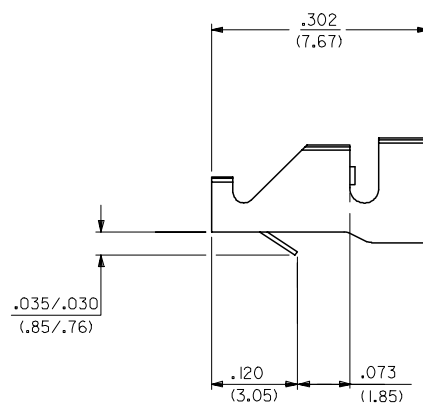

CARRIER DETAIL



RECOMMENDED PC BOARD

4706-(***)*

EDP NO.	ENG NO		
02-09-2105	4706-(P909)		
- -	-()		
- -	-()		

CHANGE TO ME10 EC NO: UCP2005-0966 DRN:ADRA1NOL 2004/11/19 CHKD: SAMIEC 2004/11/19 APPR: WARGULIS 2004/11/19 J1	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE .062 INCH IN/MM		DESIGN UNITS INCH	THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY SAMIEC	DATE 02/25/92	TITLE STRAIN RELIEF TERMINAL	
			4 PLACES ± ---	± ---	CHECKED BY	DATE		
			3 PLACES ± ---	± .010	PATEL	02/25/92		
			2 PLACES ± 0.25	± .014	APPROVED BY	DATE		
			1 PLACE ± 0.36	± ---	LENZ	02/25/92	MOLEX MOLEX INCORPORATED	
			ANGULAR ± 1/2°		MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
					SEE CHART	SD-4706	1 OF 2	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12

11

10

9

8

7

6

5

4

3

2

1

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F


E

D


C

B

A




SECTION C-C



SECTION B-B





SECTION A-A



NOTES:

1. THIS PART IS THE SAME AS SHEET I EXCEPT AS SHOWN
2. MATERIAL: 260 BRASS .006 THK
3. FINISH: (909) * OVERALL HOT TIN DIP: 2.54 MICROMETERS MIN.
4. TERMINAL 4706-3(***)* ACCEPTS 18 TO 24 AWG WIRE WITH INSULATION DIA OF .120 MAX

*THE PRIMARY SHIPPING CARTON WILL BE LABELED 'COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC.' CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.

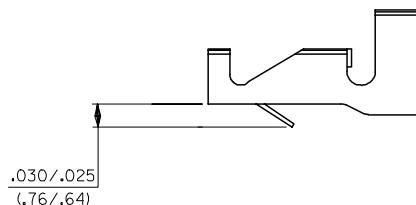

RECOMMENDED PC BOARD

.062 THK

4706-3(***)*

EDP NO.

ENG NO.

02-07-2101

4706-3(P909)

CHANGE TO ME10
EC NO: UCP2005-0966
DRAWN: ADRIANOL 2004/11/19
CHKD: SAMIEC 2004/11/19
APPR: MARGULIS 2004/11/04
J1

QUALITY SYMBOLS
=0
=0
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .010	± .004
3 PLACES	± .010	± .004
2 PLACES	± 0.25	± .010
1 PLACE	± 0.36	± .014
ANGULAR	± 1/2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY	DATE
SAMIEC	02/25/92
CHECKED BY	DATE
PATEL	02/25/92
APPROVED BY	DATE
LENZ	02/25/92

MATERIAL NO.
SIZE C

SCALE

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
STRAIN RELIEF TERMINAL

MOLEX INCORPORATED

DOCUMENT NO.
SD-4706

SHEET NO.
2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

12

11

10

9

8

7

6

5

4

3

2

1