




TOP VIEW




SIDE VIEW

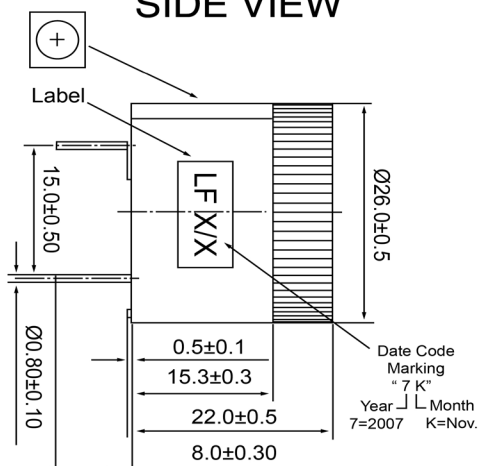

BOTTOM VIEW



Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S	
Resonant Frequency	2,800	(Hz)							
Rated Voltage	9 or 12	(V)							
SPL @ 10cm	108	(dBA)							
Tone	Single								
Mount Type	Thru-hole								
Voltage Range	5 ~ 18	(V)							
Max Rated Current	50	(mA)							
Housing Material	PBT								
Operating Temperature	-20 ~ +70	°C							
Storage Temperature	-20 ~ +70	°C		Drawn by	Date	Checked by	Date	Approved by	Date
Weight	15	(g)		A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			DB UNLIMITED	Piezo Indicator			IP262809-1		