
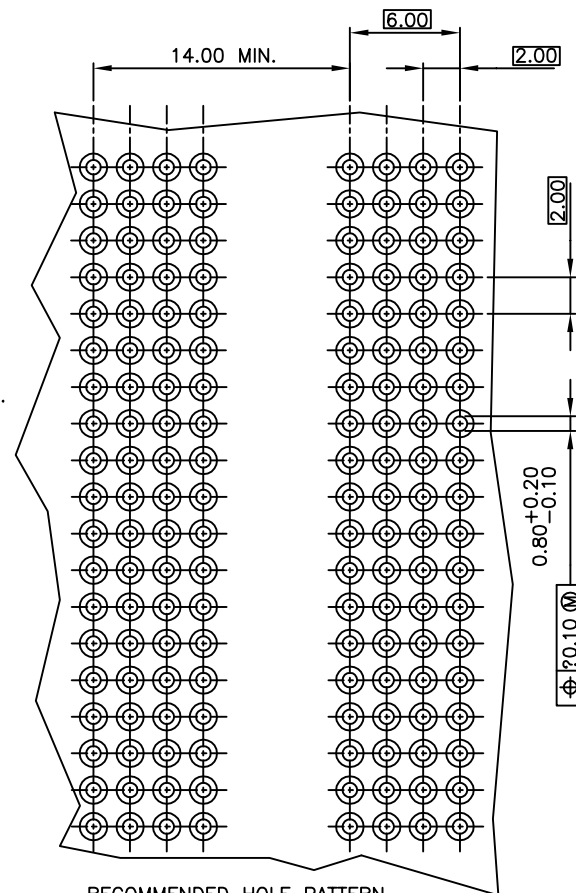
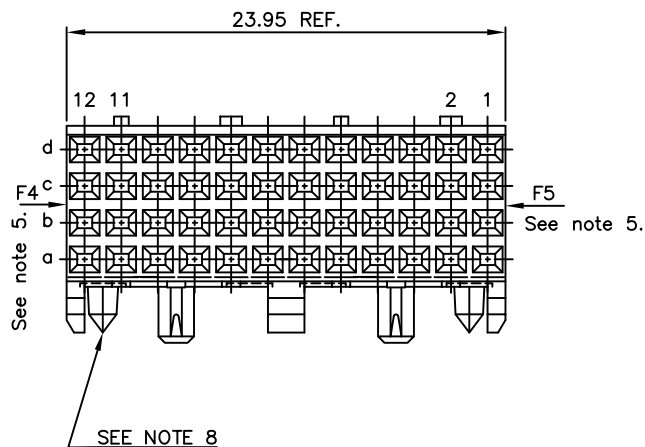


PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

PRODUCT NR.	DIM "A"
88961-X01	5.00 REF.
88961-X11	3.35 REF.
88961-X20	5.76 REF.
88961-X01LF	5.00 REF.
88961-X11LF	3.35 REF.
88961-X20LF	5.76 REF.

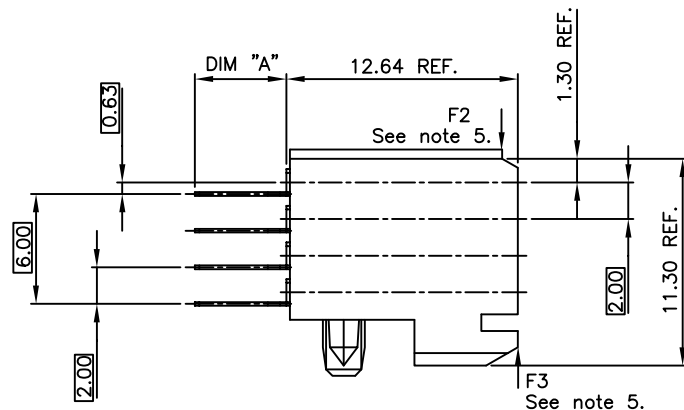

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

NOTES:

1. BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. PLATING SOLDER TAILS 2-8 $m\mu$ SnPb 90-97 OR PURE Sn FOR LF.
4. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON PER 12 MM CONNECTOR LENGTH.
5. LOAD IN THIS DIRECTION 25 NEWTON MAXIMUM PER CONNECTOR.
6. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
7. PRODUCT MARKING: PARTNUMBER & BATCH I.D.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
- 9 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
- 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
ltr	ecr no	dr	date	linear		projection	title	www.falconconnect.com	
H	D607-0170	Cent	05/22/07				STR FEMALE STB		
J	D608-0171	TER	8/26/08				SIGNAL 24MM		
K	D609-0088	Cent	06/06/08	angles			product family	METRAL (tm)	
-	-	-	-	dr	H.Bouwknegt	930219	code	213	
E	H90430	DOB	990722	engr	H.Bouwknegt	931122	size	dwg no	
F	V91450	DOB	990827	chr	J.Wintjes	930219	scale	5:1	
G	D605-0485	CLU	051115	app	H.Bouwknegt	930219	A2	88961	
sheet	revision	K						sheet	
index	sheet	1						1 of 1	