


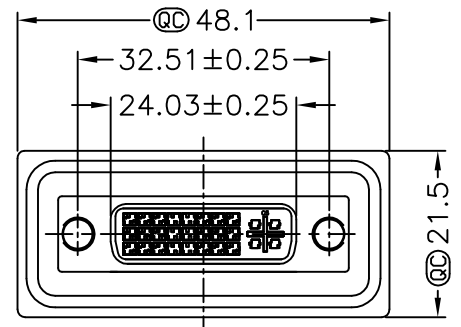



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2006/03/22	DAVID	Released Rev.A
B	LE3-710145	2006/12/13	Gao Ling	Move 0-ring to ZSE00100841

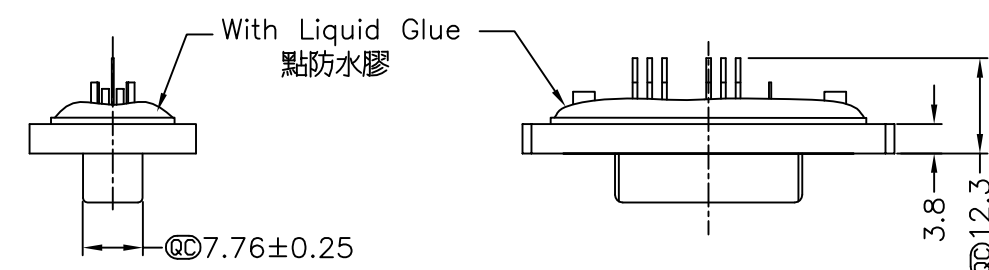

- Note:
- * @C Important Dimension.
 - * Waterproof Rate : IP68
IP68:1M of depth of water 24 hours
(防水等級 IP68)
(IP68:1 米水深 24 小時)
 - * Do Mating Test After Glued
點膠後, 須作對插測試
 - * Add glue can't highly exceed pin
(點膠高度不得蓋過 pin 針)

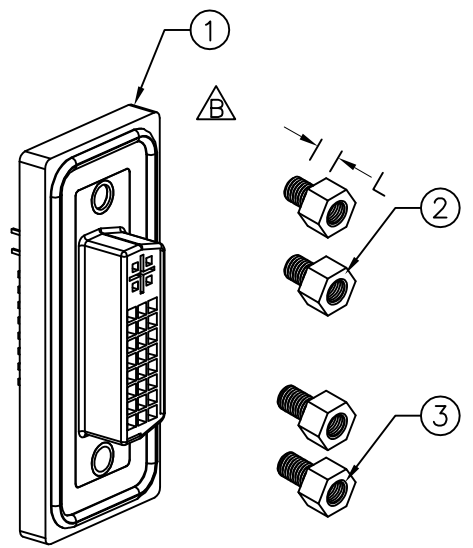


- △ * DVI Conn. :Black Core , Nylon66
- * Plastic Jacket : Black , Nylon+GF
- △ * Pin : Copper Alloy , Gold Plated
- * Ring : Light Blue,Silicone
- △ * Screw : Copper Alloy,Nickel Plated,#4-40 UNC



Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

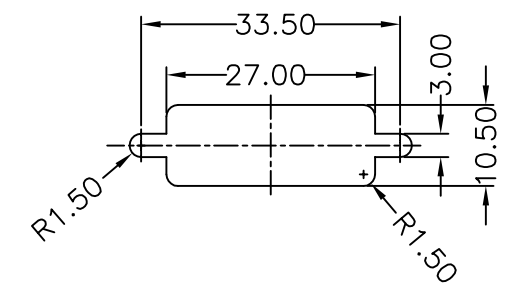

Recommended Panel Cut-Out
建議挖孔尺寸

A	UNIT:mm				TITLE Female DVI Connector(18+1)			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DDS-19PFFS-SL8001		DRAWN BY Gao Ling		DATE 2006/12/13		
	TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE Free		SHEET 1 OF 1		DWG NO DDS-19PFFS-SL8001			CHECKED BY Simon		DATE 2006/12/13				
	REV. B		SIZE A4		QC :Inspection Item		CUSTOMER ALTW		APPROVED BY Max		DATE 2006/12/13					
	1		2		3		4		5		6		7		8 FMW10702-01-01A2	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.