


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AC1	REVISED PER ECO-14-008433	05JUN2014	NK	MZ
	AD	REVISED PER ECO-17-000037	10MAR2017	RS	MZ

D

C

B

A

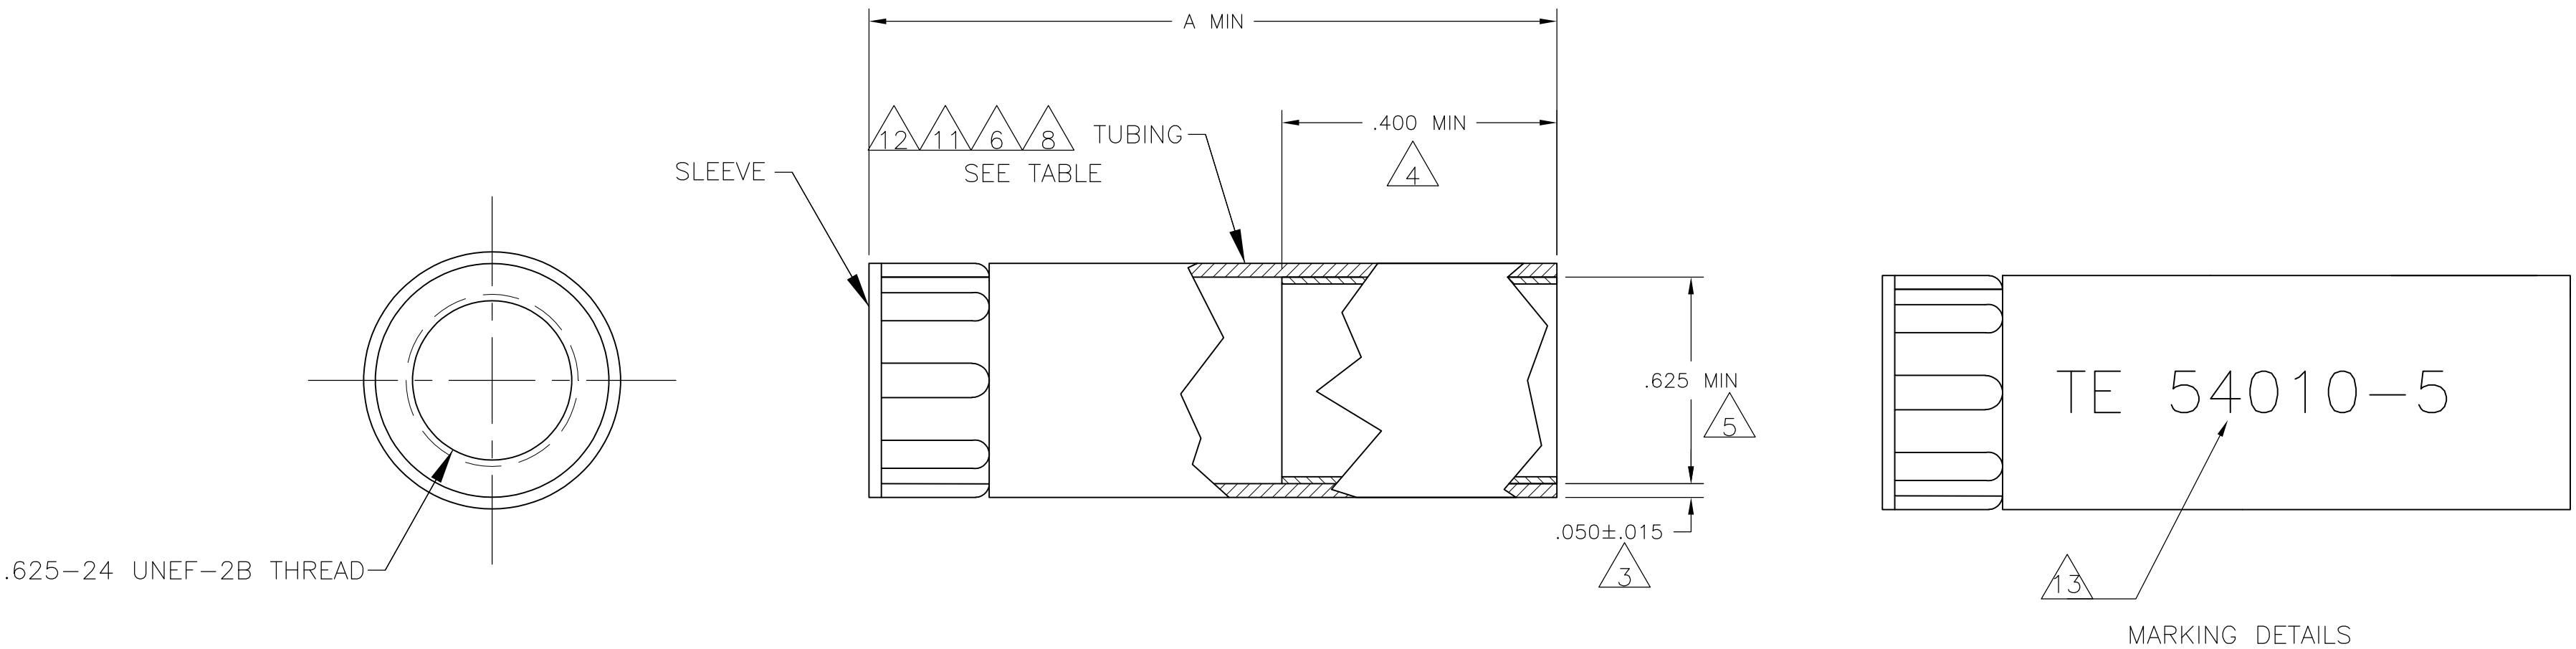

- 1

POLYOLEFIN, BLACK.
- 2

NYLON, BLACK.
- 3

NOMINAL WALL THICKNESS, EXPANDED.
- 4

LENGTH OF SEALANT.
- 5

EXPANDED INSIDE DIAMETER.
- 6

6.35[.250] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7

ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8

121°C [250°F] SHRINK TEMPERATURE.
- 9

-55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10

THIS PART WILL ACCOMODATE $\varnothing$ 6.35 - $\varnothing$ 15.24 [$\varnothing$.250 - $\varnothing$.600] CABLE RANGE.
- 11

4.06 [.160] MAXIMUM RECOVERED INSIDE DIAMETER.
- 12

ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13

SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 14

OBSOLETE PART.

TE 54010-5	6 8	2.25	14 54010-5
NONE	11 8	2.25	54010-4
NONE	6 8	1.25	54010-2
NONE	6 8	2.25	54010-1
MARKING	RECOVERED INSIDE DIS	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.REIFSNYDER 09 APR 96	TE Connectivity			
DIMENSIONS: INCHES		CHK R.STONE 15 APR 95				
		APVD T.A.WETZEL 03 MAY 96	NAME			
		PRODUCT SPEC	STRAIN RELIEF ASSY, SHELL SIZE 11, CPC			
		APPLICATION SPEC				
MATERIAL TUBING: 1 SLEEVE: 2		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=54010	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1	REV AD	