
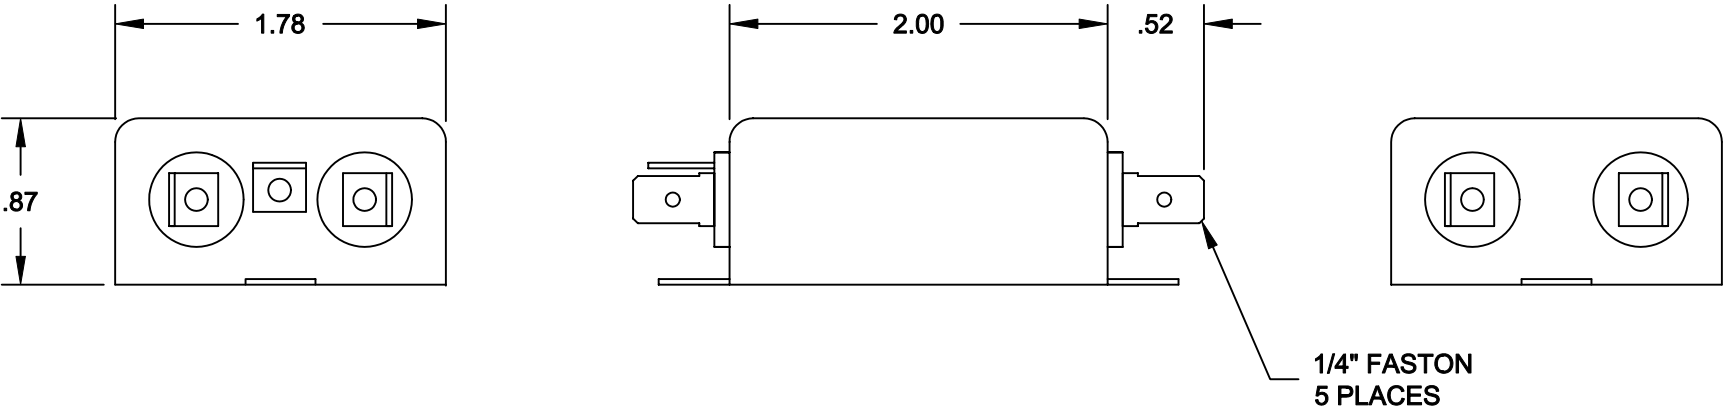


SPECIFICATIONS


1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
2A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
.45mA MAX. @ 250VAC, 50Hz

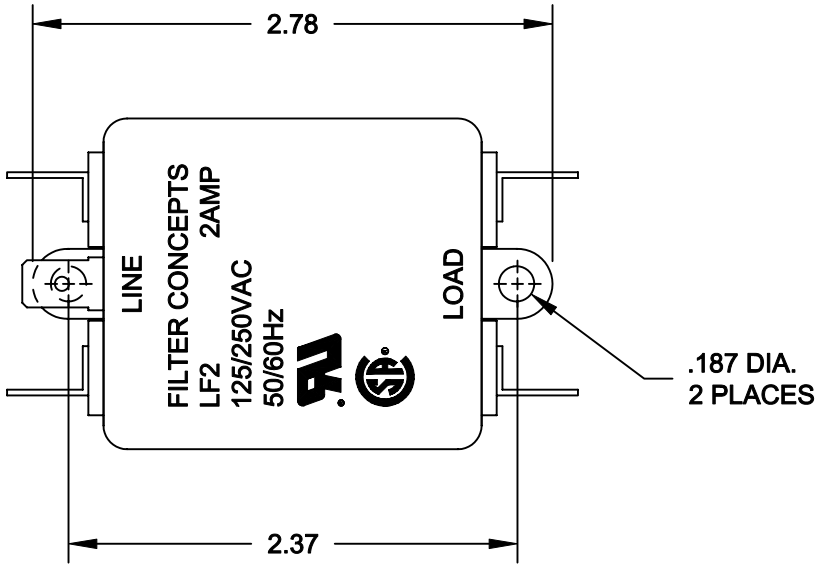

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	6 db	32 db	60 db	60 db	60 db	55 db
L/G	18 db	30 db	42 db	50 db	50 db	50 db

SCHEMATIC

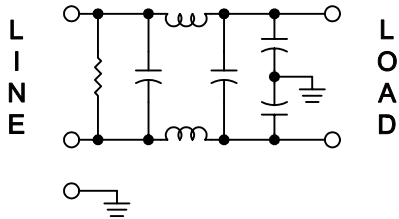

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.					
	APPROVALS		DATE					
	DRAWN		DATE		APPLICATION DRAWING LF2 FILTER			
	CHECKED		DATE					
	MATERIAL		DATE					
FINISH				SIZE				
				CODE IDENT NO.		DRAWING NO.		
				B		7520		
				SCALE		SHEET		
				1/1		1 OF 1		