
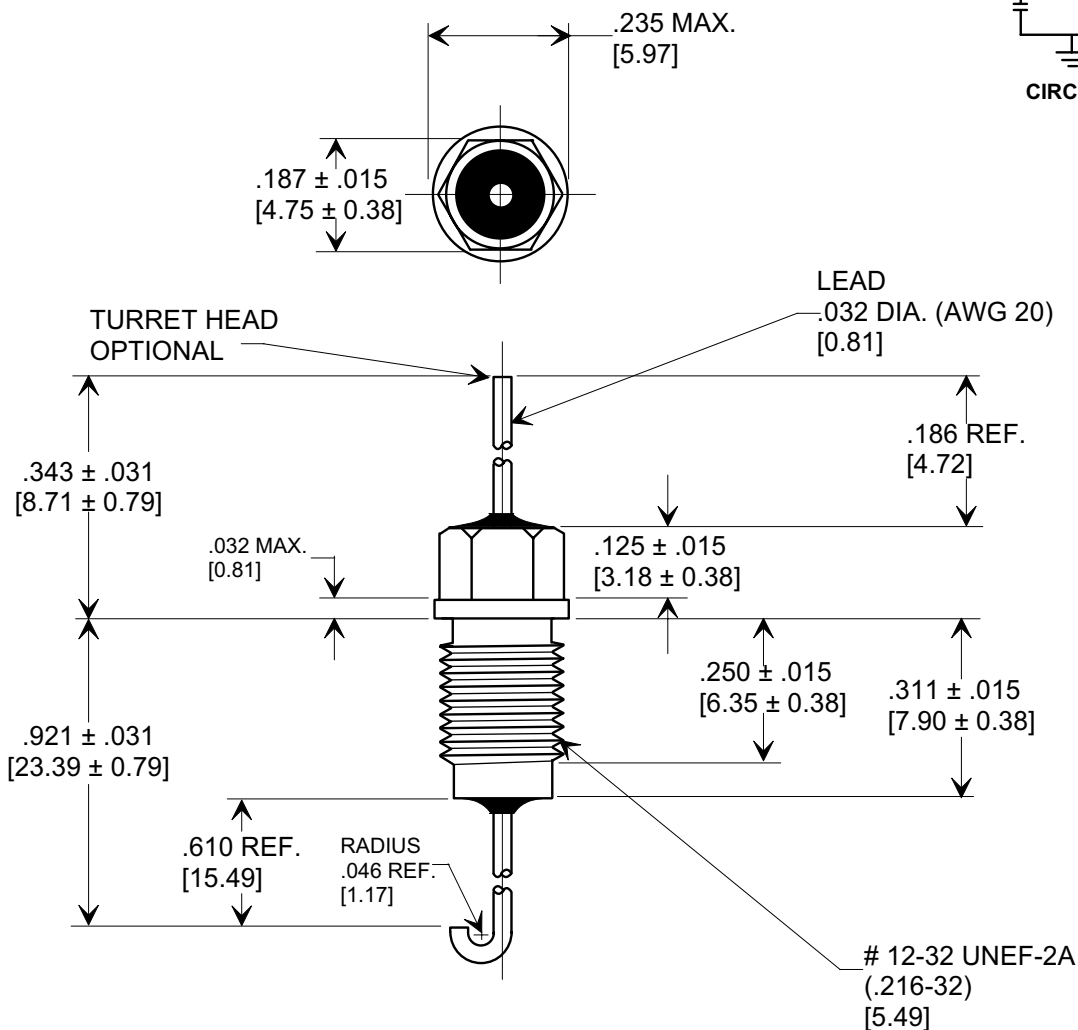


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



MIN. CAP.	+ 125 °C WORKING VOLTAGE	I.R. MIN. @ 100 VDC	DWV	CURRENT	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
					5 MHz	20 MHz	50 MHz	1 GHz	10 GHz
25,000 pF	100 VDC	10 GΩ	250 VDC	10 A	15	60	60	65	65

X-2015 Rev-0	REVISION RECORD				--TOLERANCES-- Unless Otherwise Specified	Title EMI FILTER MIL 15733/61-0012		
	Original Release C.O.		WAS SK 7096-003-S EC. 6-14-93					
	930528-2		0			Drawn L.E. 06-03-02		Scale 3 X
	940217-3		1			Approved T.C. 06-03-02		A 4253-501
	NAILHEAD RMVD. 5-1-96		DWG. REVISED EC. 5-25-94					
	960409-5		2					
	RDN TO COMPUTER FORMAT L.E. 06-03-02		20020528-3-05		20020529-3-01		TUCSON, ARIZONA	
REVISED DIM .610. S.M. 08-30-05		3		4				