


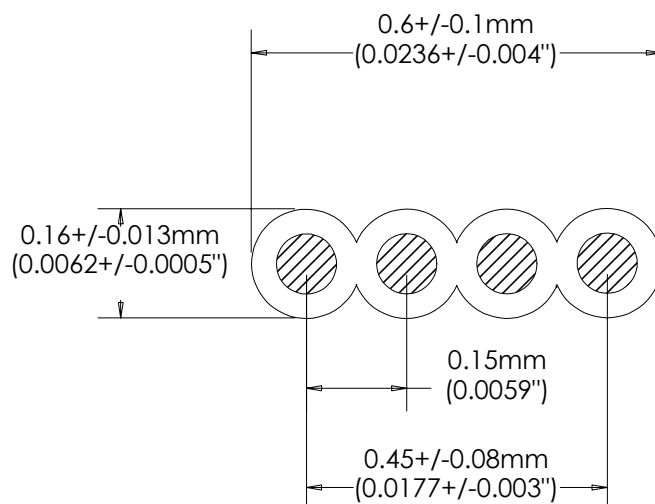

NOTES

Conductor: 40 AWG, Silver Plated Copper

Insulation: PFA, 0.04mm (0.00155") Nominal Wall Thickness

Color: Natural with Green Edge

Differential Impedance: 110+/-10 Ohms Ref.

This document is the
property of TEMP-FLEX.
It may not be disclosed,
reproduced, or otherwise
used without permission.

Rev

DCR

Description

App'd

Date

1

2755

Initial Release.

KP

10/19/11

2

4699

Update to New SAP P/N.

KP

9/25/15