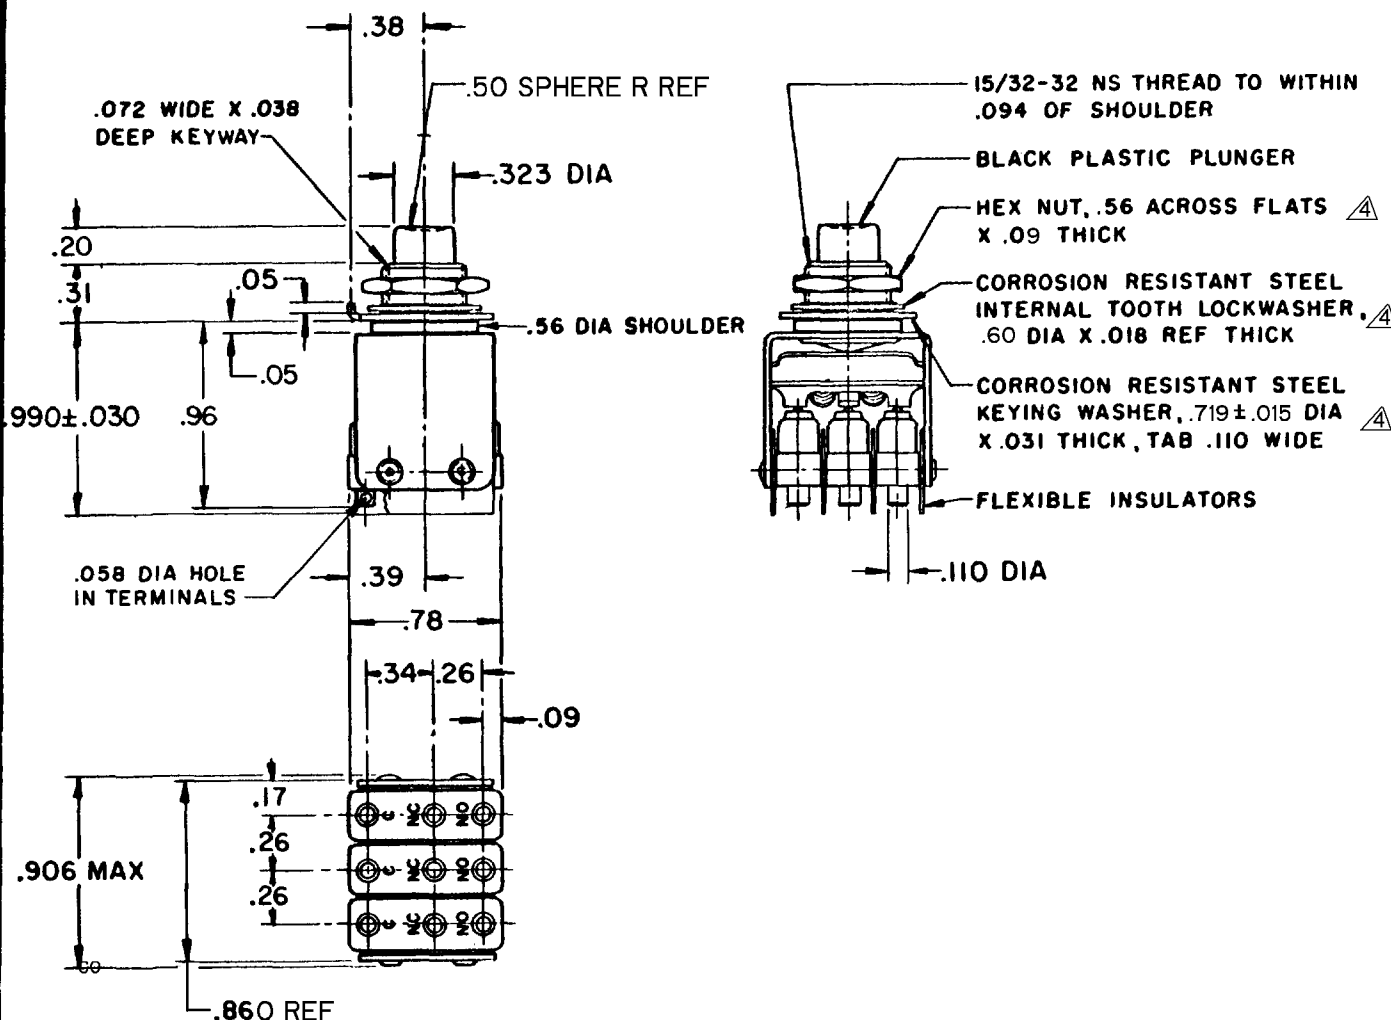


**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**

CATALOG LISTING

3 PB II**NOTES**

- 1-UNIT INCLUDES "IISM" TYPE BASIC SWITCH (3)
 - 2-TERMINALS ARE PLATED FOR SOLDERING
 - 3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- △- MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 35 OZ APPROX

TOTAL TRAVEL ——— .100 APPROX

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T (3)

250 VAC ——— 5 AMP

30 VOLTS DC RATING

INDUCTIVE ——— SEA LEVEL ——— 3 AMP

50,000 FT ——— 2.5 AMP

RESISTIVE ——— SEA LEVEL ——— 5 AMP

50,000 FT ——— 5 AMP

MAXIMUM INRUSH ——— 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT**3PBII**
PAGE 1 OF 1**M**DRAWING
NUMBERISSUE
12

REPLACES

RELEASE NO.

CHECK

98

OCT 27

98

JAF

99

CHECK

65

FEB 21

65

CHECK

65

FEB 17

65

DRAWN

HBW

FO-50376

FORMTEK