


NOTES:

1. HARDWARE IS INCLUDED.
2. PART HAS A SECURED FERRITE.

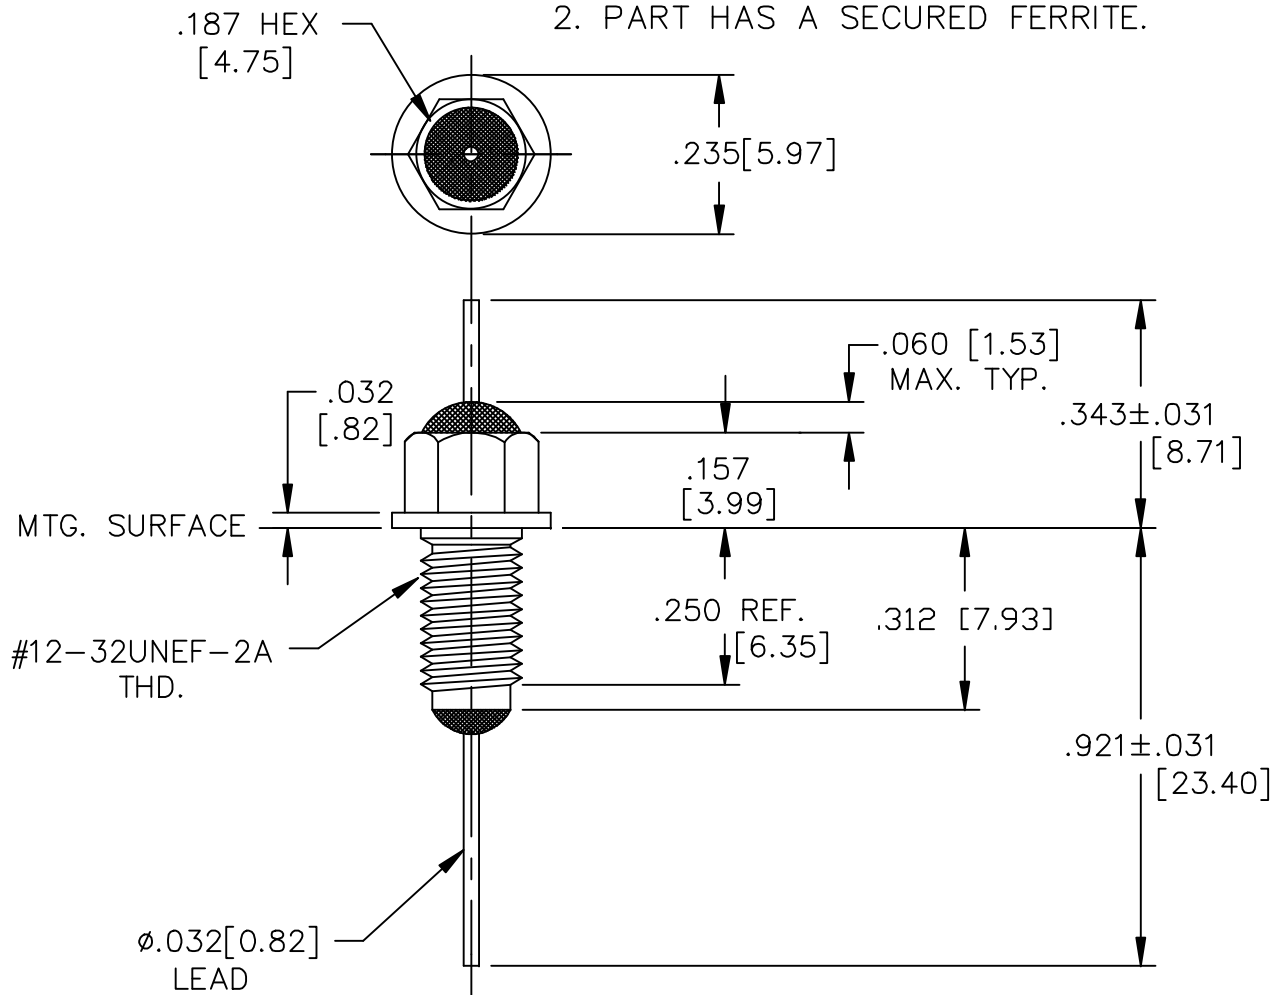

LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
25 CAPACITANCE	1500pF min./4600pF max.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 140VRMS 125°C 200VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
25 FREQ. MHz	I.L. (db)
50	16
100	30
200	48
500	70
1 GHz	70
10 GHz	70
SCHEMATIC	
MARKING:	
PART: 19202 11750801-2	
BAG:	
19202 11750801-2	
OLSP2	
DATE CODE	
200VDC 140VRMS	
125°C	
QTY./BAG (100 MAX.)	
P.O. NO.	
PACKAGE: SAME AS BAG.	
NOTE: A COPY OF THE GROUP A TEST PLAN MUST ACCOMPANY THE SHIPMENT.	

	25	24	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 FAIRVIEW PENNSYLVANIA
	CN 61385-ENG	CN 184964	CHANGE NOTICE	Fractions ± 1/64 Dec. .xx± Dec. .xxx±.010 Angles ±0° 30'	
		REDRAWN		CODE IDENT. NO. OLSP2	Dwn. KAUFFMAN Ckd. 11-7-11 Apvd. Scale NONE
					Description Pi RESIN SEAL FILTER 51-714-076