

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PISCATAWAY, NEW JERSEY

FED. MFR. CODE 91929

ACTUATOR-SWITCH

(M) SKETCH 29120

ISSUE 1

JM-5

M

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. SR 9307

28 SEP 60

BLS

CHECK

28 SEP 60

RJP

CHECK

7 NOV 60

GCH


CHECK

27 SEP 60

MBF


DRAWN

FO-50378

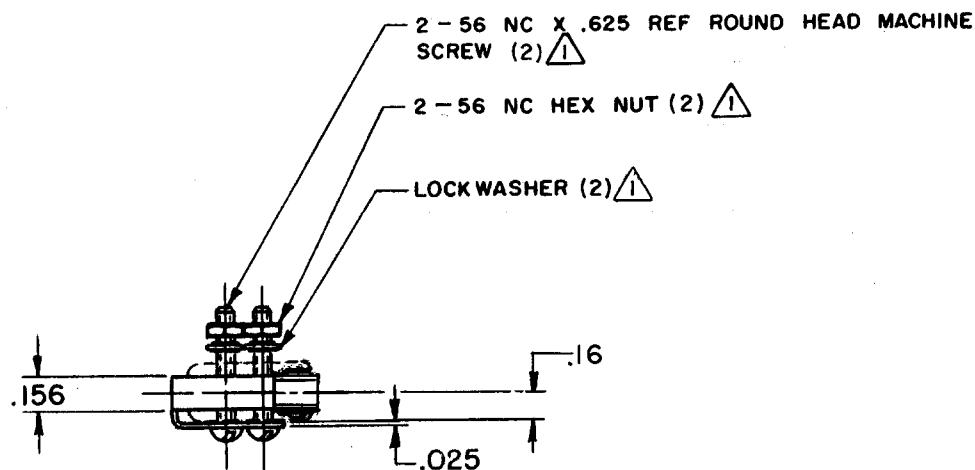

.012 THICK CORROSION RESISTANT STEEL LEAF

.19 DIA X .09 WIDE CORROSION RESISTANT STEEL ROLLER, TYPE 303 (CONCENTRICITY .003 TIR)

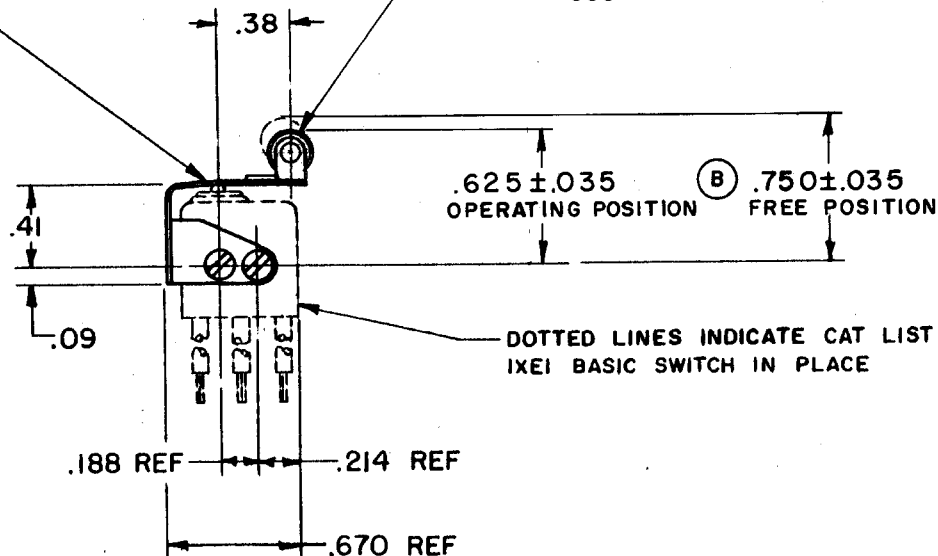

NOTE -



- FURNISHED UNASSEMBLED

CHECK RJ 14SEP05

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS WITH IXE1 BASIC SWITCH INSTALLED

OPERATING FORCE ——— 21 OZ MAX

RELEASE FORCE ——— (A) — 3 OZ MIN

DIFFERENTIAL TRAVEL ——— .012 MAX

OVERTRAVEL ——— .009 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

BREAK DISTANCE

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) $\pm$.030
TWO PLACE (.00) $\pm$.015
THREE PLACE (.000) $\pm$.005
ANGLES $\pm$

WEIGHT